FED. SUP CLASS
2910

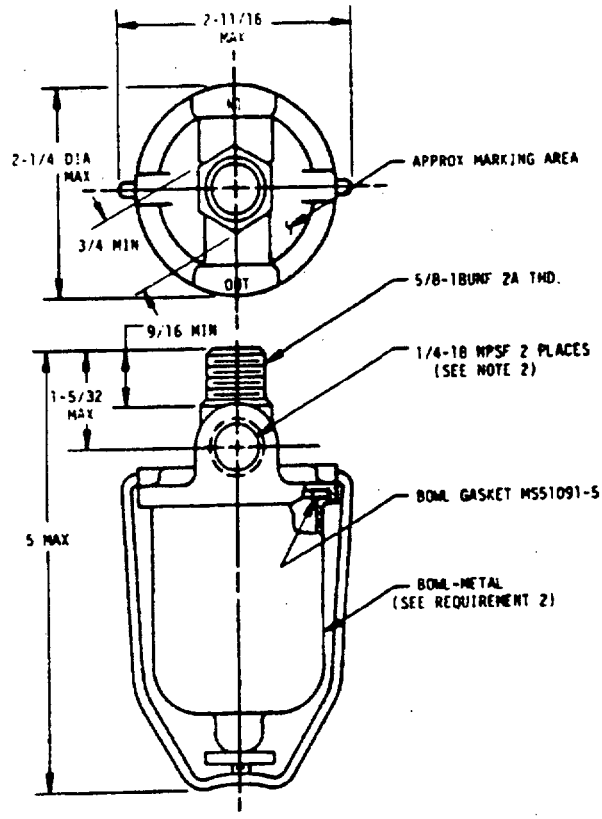

REQUIREMENTS:

1. TYPE I, CLASS 2, FUEL FILTER ASSEMBLY WITH ELEMENT, 21 G.P.M., COARSE FILTRATION, OF PROCUREMENT SPECIFICATION.
2. OPTIONAL BOWL MATERIALS:
   - (B) A. BRASS, ANNEALED, QQ-B-613, COPPER ALLOY NO. 240, 260, OR 268.
   - B. STEEL, QQ-S-636, CONDITION 3 TO 5.
3. STEEL BOWL AND COVER TO BE TREATED WITH CORROSION INHIBITOR PER TYPE 1, CLASS 2 OF MIL-T-12879.
4. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28.
5. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. DIMENSIONS ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
2. FOR 1/8-27 NPSF APPLICATION, USE APPLICABLE REDUCER BUSHING.
3. FOR INFORMATION OTHER THAN SHOWN HEREON, SEE PROCUREMENT SPECIFICATION.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER
   (B) THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEEDENCE. (SEE PARA. 5.1.16 OF MIL-STD-962)

(B) DENOTES CHANGE

MS PART NO.	FORMER PART NO.
MS51087-1	NONE

APPROVED 8 JULY 1958 REVISED (A) 23 AUGUST 1962 (B) 16 FEB 1988

P.A.	INTERNATIONAL INTEREST	TITLE
ARMY-AT, Other Govt AF-15		FILTER, FLUID PRESSURE - AUTOMOTIVE FUEL (21 GPH)

MILITARY STANDARD
MS51087

PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET
MIL-F-45356		1 OF 1

DD FORM 672-1 COORDINATED

2910-0186

USER ACTIVITIES DLA-CS

REVIEWER ACTIVITIES AF-99

AMSC N/A

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:57Z
Check the source to verify that this is the current version before use.