
MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION, LARGE FOR COAXIAL, SHIELDED CONTACTS AND FERRULES, TERMINAL LUGS, SPLICES AND END CAPS

This military specification has been prepared by the Electronic Support Division, AFLC 2750 ABW/ES based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-I-81969/5E. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in acquisition.

The requirements for acquiring the crimping tools described herein shall consist of this specification and the latest issue of MIL-C-22520.

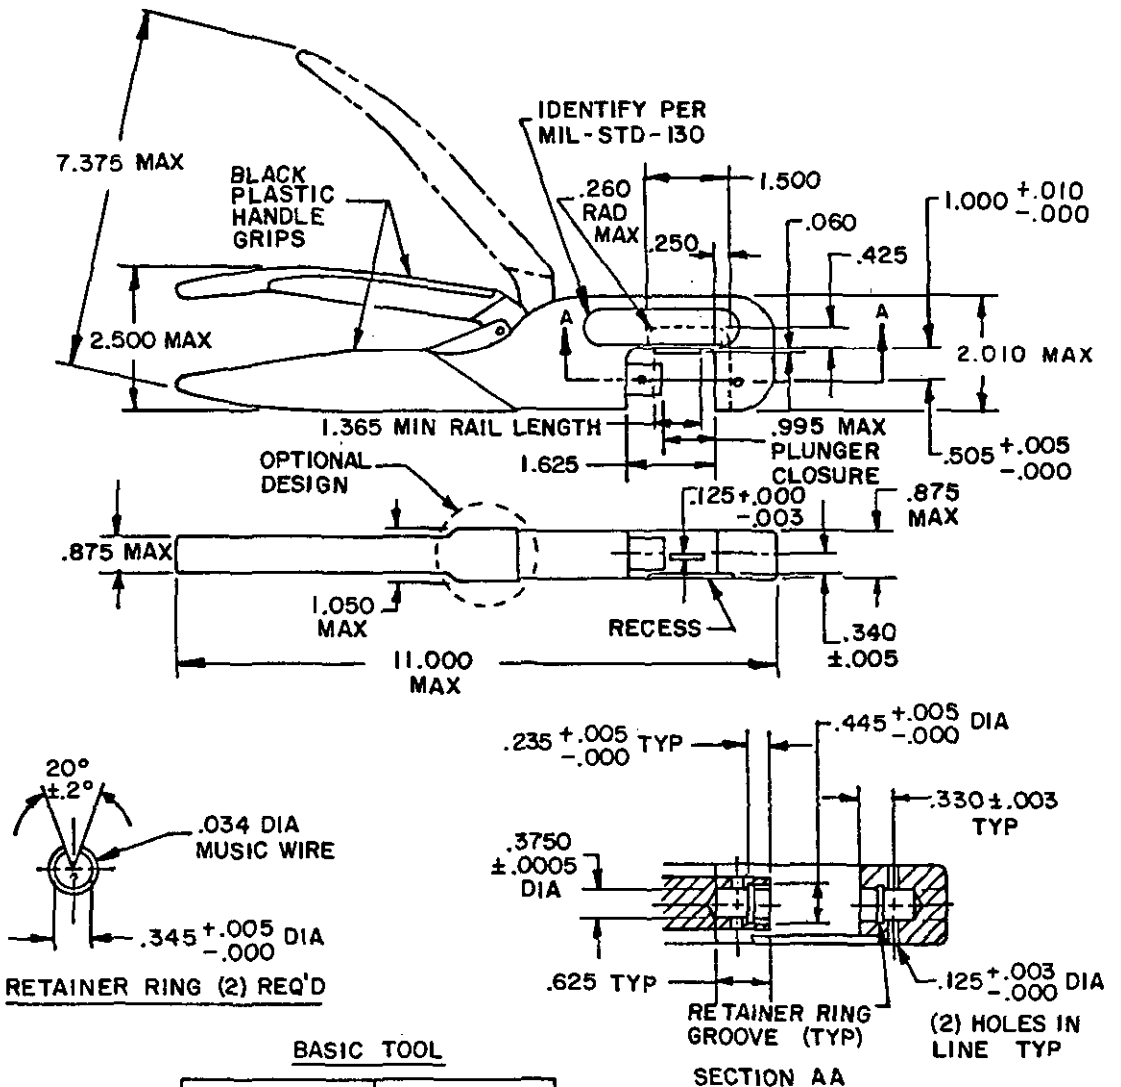

BASIC TOOL

PART NO.	BODY COLOR
M22520/5-01	GOLD

FIGURE 1. Basic tool dimensions.

AMSC N/A
FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.0005	0.01	.304	7.72	.995	25.27
.003	0.08	.330	8.38	1.000	25.40
.005	0.13	.345	8.76	1.050	26.67
.010	0.25	.375	9.53	1.365	34.67
.034	0.86	.425	10.80	1.500	38.10
.060	1.52	.445	11.30	1.625	41.28
.125	3.18	.505	12.83	2.010	51.05
.250	6.35	.625	15.88	2.500	63.50
.260	6.60	.875	22.23	7.375	187.33
				11.000	279.40


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, dimensions in inches, tolerances: Decimals ±.010 (0.25 mm), angles ±1/2°.
4. Outline configuration optional within maximum dimensions shown.
5. For applicable dies see figure 2 through 10 and tables III and IV.
6. For inspection gauges used see tables I and II and figures 6 and 7.
7. Dies are interchangeable in basic tool, when permanent die assembly is required, they may be pinned in place by means of MS171526 spring pins.

REQUIREMENTS:
1. The weight of the basic tool shall not exceed 2.0 pounds.
2. Ratchet release force on the handle shall be set to 30-50 pounds when the tool is closed on a 1.000 ±.0005 die or gauge block.
3. The following information is supplemental to 3.5.6 and 4.7.6.2 of MIL-C-22520.

Die no.	Test cable	Test ferrule ±.002 tol.	Compressive force lbs. max.
M22520/5-61	RG214/U	.440 ID,.495 OD	100

FIGURE 1. Basic tool dimensions- Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

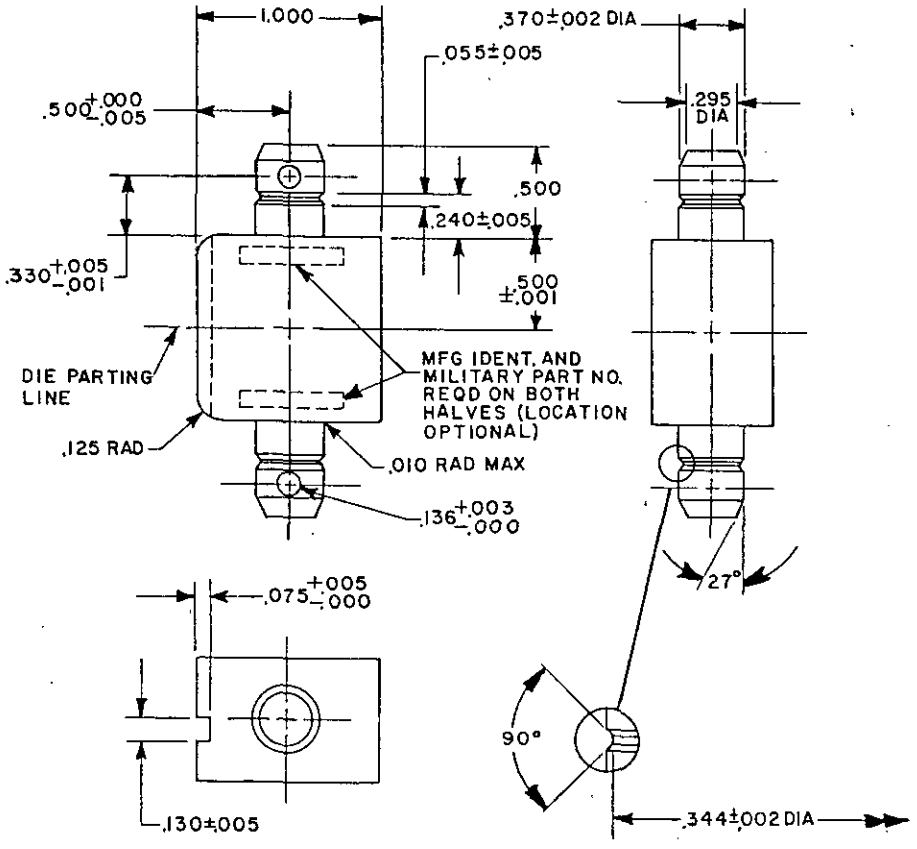


Inches	mm	Inches	mm
.001	0.03	.136	3.45
.002	0.05	.240	6.10
.003	0.08	.295	7.49
.005	0.13	.330	8.38
.010	0.25	.344	8.74
.055	1.40	.370	9.40
.075	1.91	.500	12.70
.125	3.18	1.000	25.40
.130	3.30		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, dimensions in inches, tolerances: Decimals ±.010 (0.25 mm), angles ±1/2°.
4. Dimensions and requirements are applicable to both die halves.
5. For crimp die closure details see figures 3,4,5,6 and 7.

REQUIREMENTS:
1. Material: Dies shall be steel in accordance with QQ-S-628 class B or SAE 0-6 hardness C52-58.
2. Finish: Black oxide in accordance with MIL-C-13924.
3. Surface texture on crimping surfaces shall be 32 microinches, in accordance with ASA B46.1-1962 (ANSI).
4. Remove all burrs. Break all edges and corners.

FIGURE 2. Basic die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

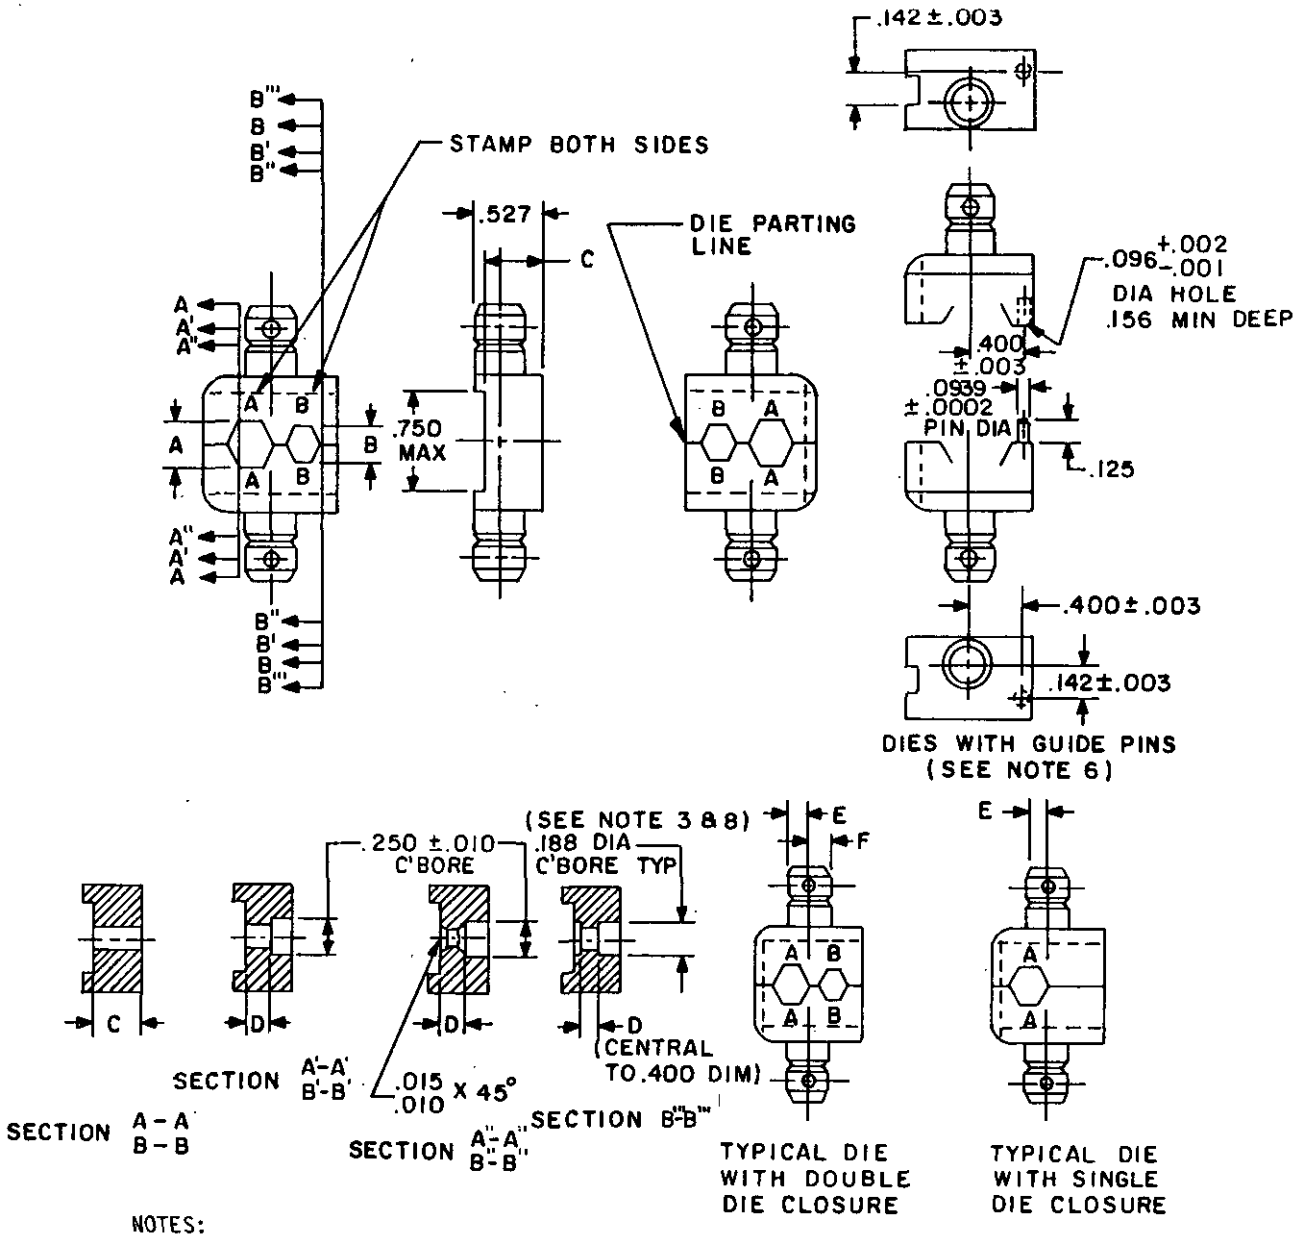

NOTES:
1. For additional die dimensions, see tables I and II.
2. All dies shall have a full length keyway. When the "C" dimension is less than .400 (10.16 mm), the .750 (19.05 mm) maximum cutout shall not extend across the face of the die. Configuration of the cutout is optional.
3. When both A & B hex's require a counterbore, the .250 (6.35 mm) diameter maximum shall apply to the hex with the smallest "D" dimension. The counterbore for the other hex can be larger and shall be shaped so no sharp edges are formed at the intersection of the counterbores.
4. See tables III and IV for application data.
5. Hex die closure details for coaxial, shielded contacts: Shielded terminating ferrules and coaxial radio frequency, class 2 crimp type series connectors.
6. Dies with crimp cavities .100 inches and smaller (dimension A or BO shall have alignment guide pins installed.
7. Alignment guide pins and holes are not required for dies where all crimp cavities are larger than .100 inches.
8. M22520/5-25 dies must have .188 diameter counter-bore (see section B"'-B"').

FIGURE 3. Basic hex die and dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE I. Dies for coaxial, shielded contacts.

Part number	Die dimensions						In-service inspection gauge		Contacts accommodated (Ref)	Cables accommodated (Ref)
	A ±.003 (0.08) Ref section	B ±.003 (0.08) Ref section	C ±.010 (0.25)	D ±.010 (0.25)	E ±.003 (0.08)	F ±.003 (0.08)	Die Closure A	Die Closure B		
M22520/5-02	.091 A"-A" (2.31)	.068 B'-B' (1.73)	.385 (9.78)	.090 (2.29) .270 (6.86)	.175 (4.44)	.075 (1.90)	M22520/6 -030	M22520/6 -029	M39029/6-01 M39029/13-01 M39029/14-01	MIL-C-17/93 Grumman GC 18K-1-22S Revere WH-95623
M22520/5-04	.138 A"-A" (3.51)	.118 B'-B' (3.00)	.385 (9.78)	.090 (2.29) .270 (6.86)	.174 (4.42)	.076 (1.93)	M22520/6 -028	M22520/6 -002	M39029/6-02, -03, -04, -05, -06 M39029/13-02, -03, -04, -05, -06 M39029/14-02, -03, -04, -05, -06	MIL-C-17/94, MIL-C-17/95, MIL-C-17/113, Microdot 293-3922 Microdot 250-4070 Raychem 9530D5117 Raychem 5022E5111
M22520/5-06	.128 A'-A' (3.25)	None	.400 (10.16)	.094 (2.39)	.050 (1.27)	---	M22520/6 -029	---	M39029/7-001 M39029/8-001	MIL-C-17/93 30 AWG 28 AWG
									M39029/7-002 M39029/8-002	MIL-C-17/113, MIL-C-17/119 26 AWG
									M39029/7-003 M39029/8-003	24 AWG
M22520/5-08	.128 A-A (3.25)	None	.375 (9.52)	---	.050 (1.27)	---	M22520/6 -003	---	M83733/13 M83733/14	MIL-C-17/94
M22520/5-10	.160 A-A (4.26)	None	.400 (10.16)	---	.050 (1.27)	---	M22520/6 -005	---	ON089558-1 ON089558-2	MIL-C-17/95

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE II. Dies for shielded termination ferrules and for coaxial radio frequency class 2, crimp type series connectors.

Part no.	A +.003 Dim	A +.003 Ref. section	B +.003 Dim	B +.003 Ref. section	C ±.010	D ±.010	E ±.003	F ±.003	In-service Inspection gauge Die closure A	In-service Inspection gauge Die closure B	Supersedes		
M22520/5-03	.128	A-A	.105	B-B	.325	---	.114	.246	M22520/6-003	M22520/6-001			
" -05	.213	"	.178	B-B	.325	---	.114	.246	" -008	M22520/6-006			
" -07	.255	"	None	B-B	.325	---	.050	---	" -011	---			
" -09	.178	"	.068	B' -B'	.400	.093	.188	.125	" -006	M22520/6-029		MS27437-05	
" -11	.213	"	.068	B' -B'	.400	.093	.188	.125	" -008	M22520/6-029		MS27437-06	
" -13	.255	"	.068	B' -B'	.400	.093	.188	.125	" -011	M22520/6-029		MS27437-07	
" -15	.263	"	.068	B -B	.400	.093	.188	.125	" -012	M22520/6-029		MS27437-08	
" -17	.118	"	None		.375	---	.050	---	" -002	---			MS90487-1
" -19	.255	"	.213	B-B	.400	---	.159	.231	" -011	M22520/6-008	M22910/7-17		
" -21	.475	"	None		"	---	.050	---	" -025	---	M22910/7-24		
" -23	.384	"	None		"	---	.050	---	" -020	---	M22910/7-20		
" -25	.429	"	.100	B"- B"	"	.120	.130	.258	" -022	M22520/6-031		MS27437-04	
" -27	.532	"	None		"	---	.050	---	" -027	---	M22910/7-26		
" -29	.324	"	.100	B' -B'	"	.120	.187	.187	" -017	M22520/6-031		MS27437-03	
" -31	.501	"	None		"	---	.050	---	" -026	---	M22910/7-25		

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE II. Dies for shielded termination ferrules and for coaxial radio frequency class 2, crimp type series connectors - Continued.

Part no.	A +.003 Dim	A +.003 Ref. section	B +.003 Dim	B +.003 Ref. section	C ±.010	D ±.010	E ±.003	F ±.003	In-service Inspection gauge Die closure A	In-service Inspection gauge Die closure B	Supersedes		
" -33	.343	"	.105	B-B	"	---	.159	.191	" -018	M22520/6-001	" -11		
" -35	.324	"	.128	"	"	---	"	"	" -017	-003	" -12		
" -37	.314	"	.151	"	"	---	"	"	" -016	-004	" -13		
" -39	.309	"	.160	"	"	---	"	"	" -015	-005	" -14		
" -41	.290	"	.178	"	"	---	"	"	" -014	-006	" -15		
" -43	.268	"	.197	"	"	---	.159	.191	" -013	-007	" -16		
" -45	.231	"	.218	B-B	"	---	.199	.151	" -010	M22520/6-009	" -18		
" -47	.359	"	None		"	---	.050	---	" -019	---	" -19		
" -49	.401	"	None		"	---	"	---	" -021	---	" -21		
" -51	.431	"	None		"	---	"	---	" -023	---	" -22		
" -53	.454	"	None		"	---	"	---	" -024	---	M22910/7-23		
" -55	.324	"	None		"	---	.050	---	" -017	---			
" -57	.213	"	.100	B' -B'	"	.120	.185	.130	" -008	M22520/6-031		MS27437-09	
" -59	.255	"	.100	B' -B'	"	.120	.185	.130	" -011	M22520/6-031		MS27437-10	
" -61	.429	"	None		"	---	.050	---	" -022	---			
M22520/5-63	.263	A-A	.091	B" -B"	.400	.090	.159	.191	M22520/6-012	M22520/6-030			

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.128	3.25	.213	5.41	.343	8.71
.010	0.26	.130	3.30	.218	5.54	.359	9.12
.050	1.27	.151	3.84	.231	5.87	.375	9.53
.068	1.73	.159	4.04	.246	6.25	.384	9.75
.090	2.29	.160	4.06	.255	6.48	.400	10.16
.091	2.31	.178	4.52	.258	6.55	.401	10.19
.093	2.36	.185	4.70	.263	6.68	.429	10.90
.100	2.54	.187	4.76	.268	6.81	.431	10.95
.105	2.67	.188	4.78	.290	7.37	.454	11.53
.114	2.90	.191	4.85	.309	7.85	.475	12.06
.118	3.00	.197	5.00	.314	7.98	.501	12.73
.120	3.05	.199	5.05	.324	8.23	.532	13.51
.125	3.17			.325	8.26		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:45Z
Check the source to verify that this is the current version before use.

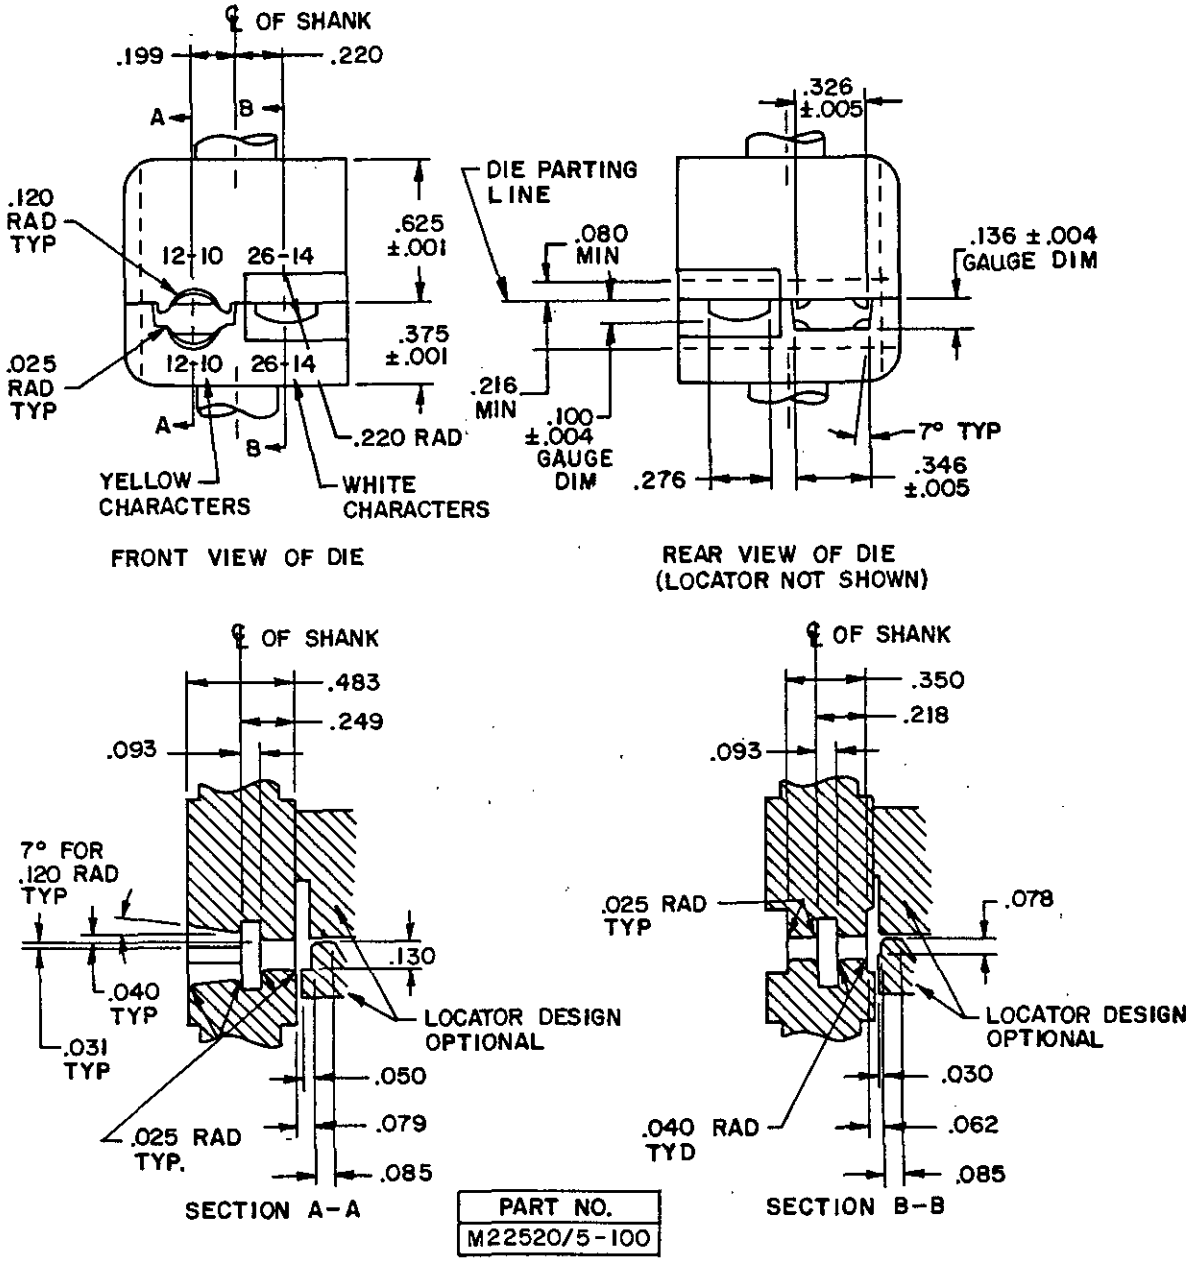


FIGURE 4. M22520/5-100 die dimensions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.


Inches	mm	Inches	mm	Inches	mm
.001	0.03	.079	2.01	.218	5.54
.004	0.10	.080	2.03	.220	5.59
.005	0.13	.085	2.16	.249	6.32
.025	0.64	.093	2.36	.276	7.01
.030	0.76	.100	2.54	.326	8.28
.031	0.79	.120	3.05	.346	8.79
.040	1.02	.130	3.30	.350	8.89
.050	1.27	.136	3.45	.375	9.53
.062	1.57	.199	5.05	.483	12.27
.078	1.98	.216	5.49	.625	15.88

NOTES:
1. Locator is to be attached to upper die. It shall provide a positive stop for locating the item to be crimped and retain it in place without being held by the operator. During the crimping operation the locator shall be free to move as necessary to prevent the crimped item from bending. See 3.5.9.2 of MIL-C-22520.
2. Die closure details for MS25036, MS17143, M7928 insulated lug terminals and splices, MS25274 end caps, MS27429 insulated disconnect splices and M81824/2-2 and -3 environmental splices.
3. Dimensions are in inches
4. Metric equivalents are given for general information only.

FIGURE 4. M22520/5-100 die dimensions.-Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

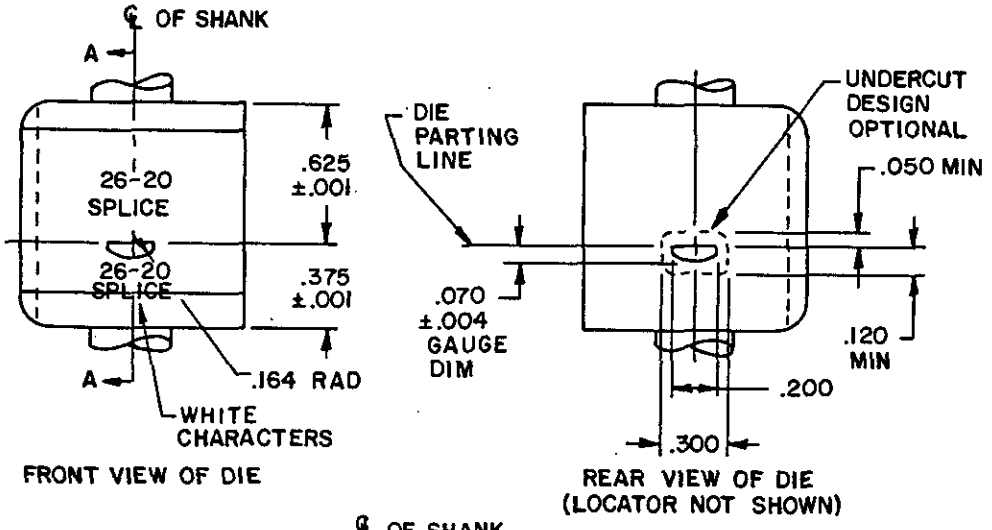

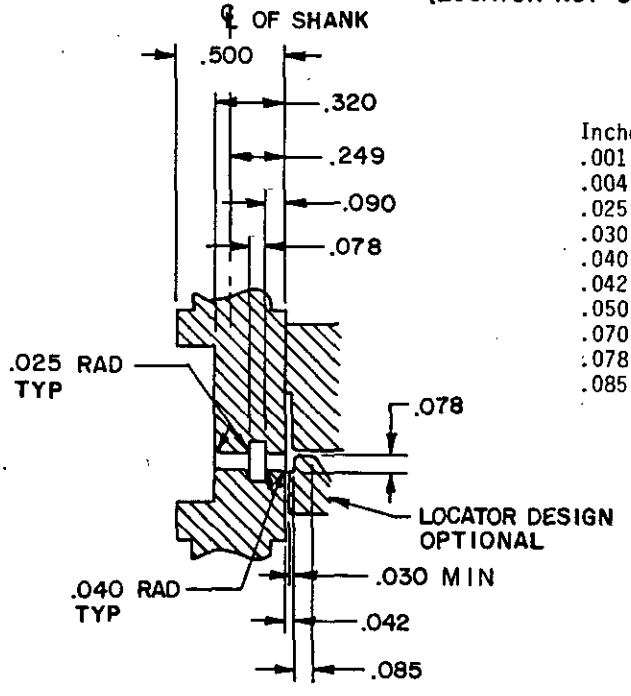

SECTION A-A


Inches	mm	Inches	mm
.001	0.03	.090	2.29
.004	0.10	.120	3.05
.025	0.64	.164	4.17
.030	0.76	.200	5.08
.040	1.02	.249	6.32
.042	1.07	.300	7.62
.050	1.27	.320	8.13
.070	1.78	.375	9.53
.078	1.98	.500	12.70
.085	2.16	.625	15.88

PART NO.
M22520/5-101

NOTES:
1. Locator is to be attached to upper die. It shall provide a positive stop for locating the item to be crimped and retain it in place without being held by the operator. During the crimping operation the locator shall be free to move as necessary to prevent the crimped item from bending. See 3.5.9.2 of MIL-C-22520.
2. Die closure details for M7928/5 insulated splices and M81824/2-1 environmental splices.
3. Dimensions are in inches.
4. Metric equivalents are given for general information only.

FIGURE 5. M22520/5-101 die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

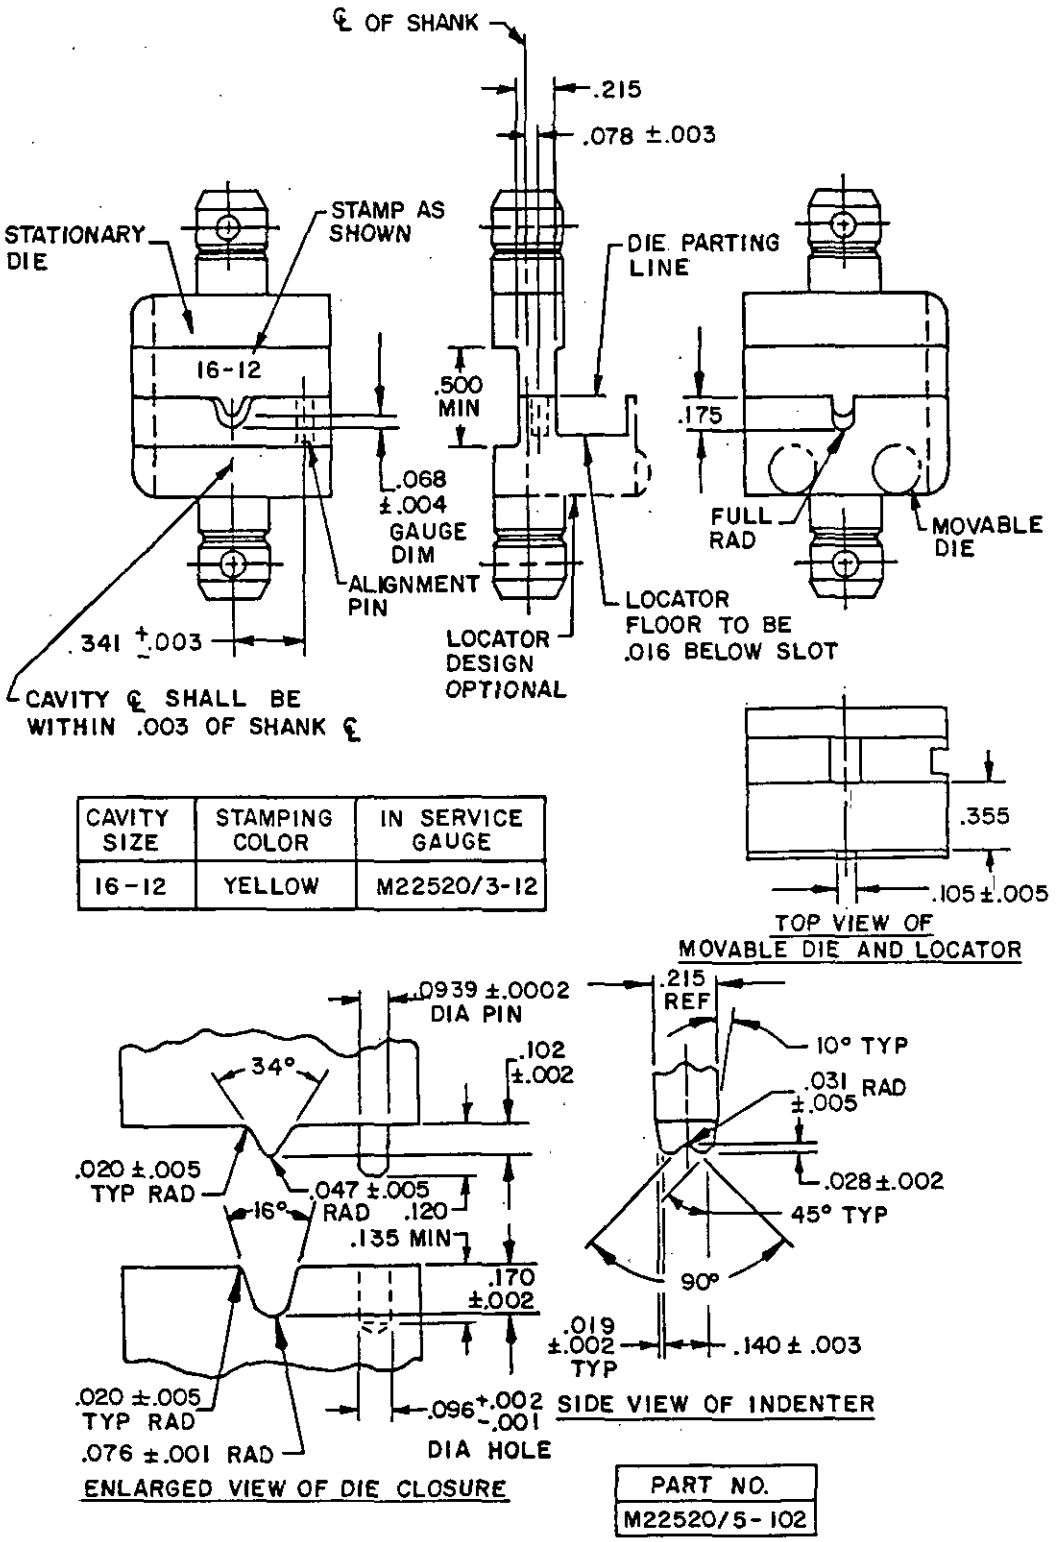

CAVITY SIZE	STAMPING COLOR	IN SERVICE GAUGE
16-12	YELLOW	M22520/3-12

PART NO.
M22520/5-102

FIGURE 6. M22520/5-102 die dimensions.


Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.001	0.03	.076	1.93
.002	0.05	.078	1.98
.003	0.08	.093	2.36
.004	0.10	.095	2.41
.005	0.13	.102	2.59
.016	0.41	.105	2.67
.019	0.48	.135	3.43
.020	0.51	.140	3.56
.028	0.71	.175	4.45
.031	0.79	.215	5.46
.047	1.19	.341	8.66
.068	1.73	.355	9.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The die faces must touch at completion of crimping cycle.
4. Die closure details for MIL-S-81824/1-3 splices.

FIGURE 6. M22520/5-102 die dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

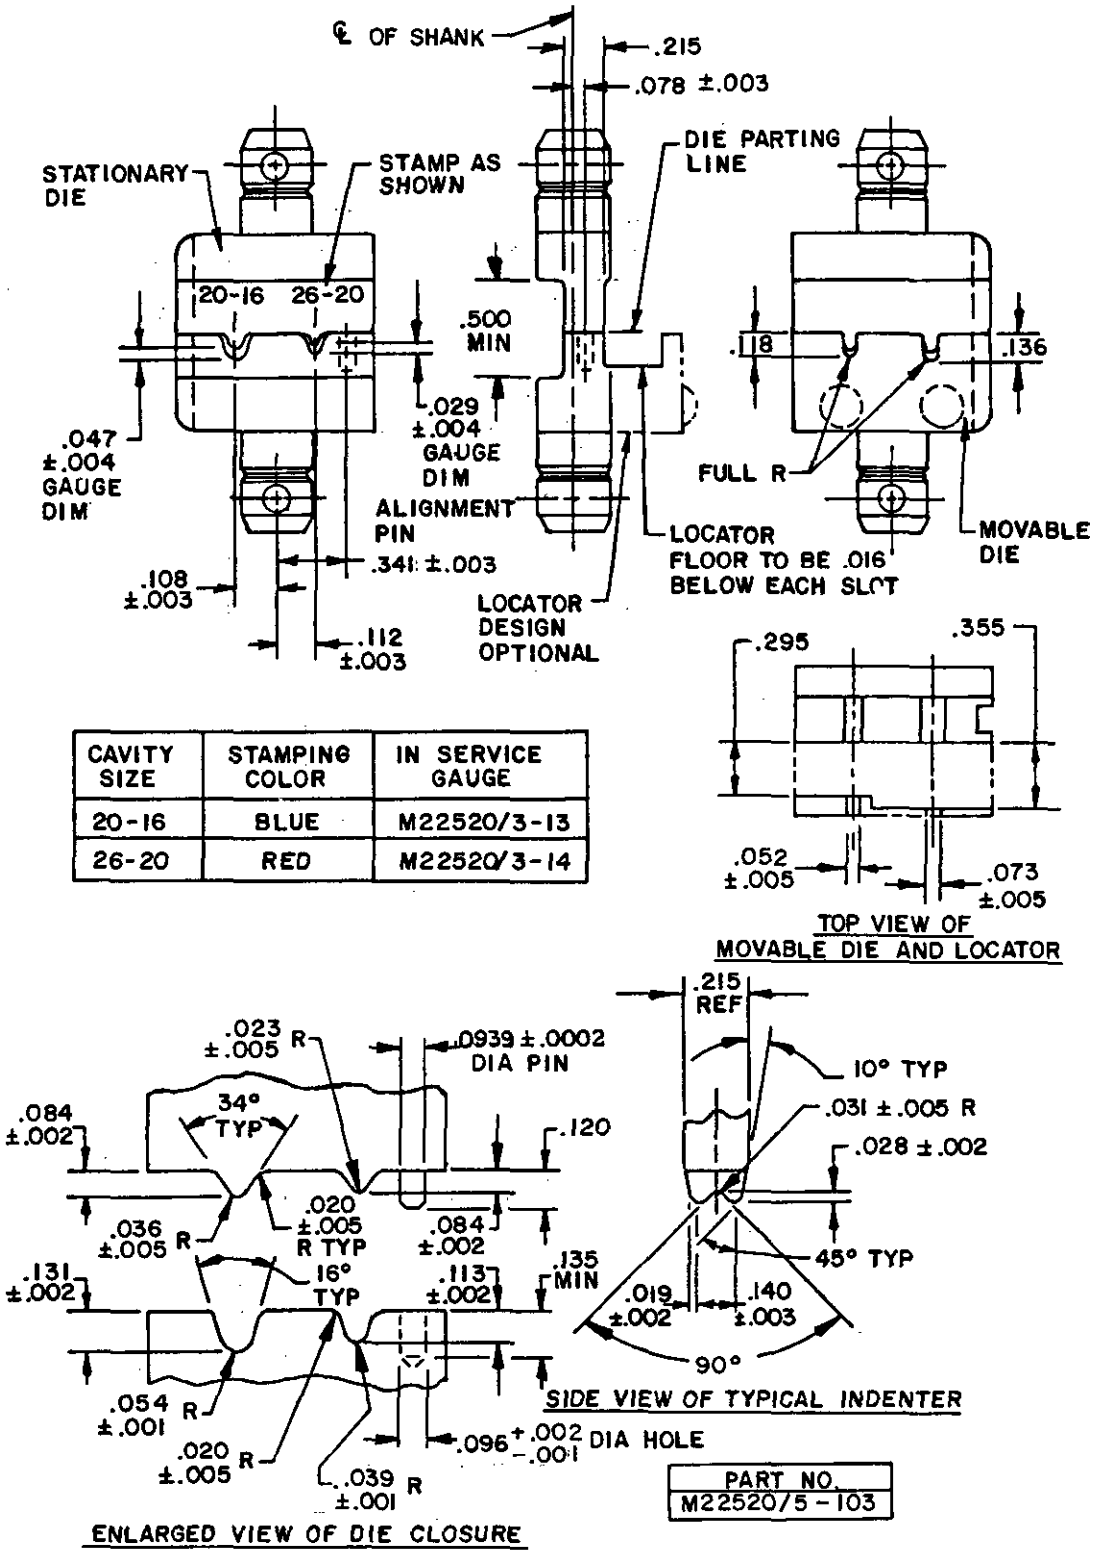

CAVITY SIZE	STAMPING COLOR	IN SERVICE GAUGE
20-16	BLUE	M22520/3-13
26-20	RED	M22520/3-14

PART NO.
M22520/5-103

FIGURE 7. M22520/5-103 die dimensions.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the currentversion before use.

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.036	0.91	.113	2.87
.002	0.05	.039	0.99	.118	3.00
.003	0.08	.047	1.19	.120	3.05
.004	0.10	.052	1.32	.130	3.30
.005	0.13	.054	1.37	.131	3.33
.016	0.41	.073	1.85	.135	3.43
.020	0.51	.078	1.98	.215	5.46
.023	0.58	.084	2.13	.295	7.49
.028	0.71	.093	2.36	.341	8.66
.029	0.74	.095	2.41	.355	9.02
.031	0.79	.108	2.74	.500	12.70
		.112	2.84		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The die faces must touch at completion of crimping cycle.
4. Die closure details for MIL-S-81824/1-1 and MIL-S-81824/1-2 splices.

FIGURE 7. M22520/5-103 die dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the currentversion before use.

TABLE III. Application data for shield terminating ferrule dies.

Inner conductor insulation diameter range		Inner ferrule part number MS21981	Outer conductor shield O.D.		To crimp uninsulated outer ferrule part number MS21980 1/	Use		To crimp insulated outer ferrule part number MS31821 1/	Use	
Max	Min		Max	Min		Die part number M22520/5	Die closure		Die part number M22502/5	Die closure
.038	.018	-046	.048	.028	-101	-33	B	-101	-35	B
.050	.030	-058	.065	.050	-128	-35	B	-128	-37	B
.055	.035	-063	.075	.057	-128	-35	B	-128	-37	B
.063	.043	-071	.078	.060	-128	-35	B	-128	-37	B
.063	.043	-071	.096	.072	-149	-37	B	-149	-41	B
.072	.052	-080	.092	.074	-149	-37	B	-149	-41	B
.082	.062	-090	.097	.079	-149	-37	B	-149	-41	B
.088	.068	-096	.105	.088	-156	-39	B	-156	-43	B
.093	.073	-101	.124	.106	-175	-41	B	-175	-19	B
.102	.082	-109	.130	.118	-175	-41	B	-175	-19	B
.102	.082	-109	.137	.117	-187	-43	B	-187	-45	A
.116	.096	-124	.138	.118	-187	-43	B	-187	-45	A
.116	.096	-124	.146	.128	-194	-43	B	-194	-45	A
.116	.096	-124	.151	.138	-199	-43	B	-199	-45	A
.120	.100	-128	.153	.133	-205	-19	B	-205	-19	A
.120	.100	-128	.165	.147	-219	-19	B	-219	-19	A
.126	.106	-134	.148	.128	-205	-19	B	-205	-19	A
.126	.106	-134	.158	.149	-225	-45	B	-225	-19	A
.126	.106	-134	.181	.162	-232	-45	A	-232	-43	A
.141	.121	-149	.171	.153	-232	-45	A	-232	-43	A
.148	.128	-156	.192	.174	-261	-19	A	-261	-41	A
.157	.137	-165	.195	.177	-261	-19	A	-261	-41	A
.167	.147	-175	.189	.165	-261	-19	A	-261	-41	A
.167	.147	-175	.205	.185	-275	-43	A	-275	-39	A
.179	.159	-187	.210	.192	-281	-41	A	-281	-35	A
.186	.166	-194	.224	.206	-287	-41	A	-287	-35	A
.197	.177	-205	.232	.215	-297	-41	A	-297	-35	A
.197	.177	-205	.241	.223	-312	-39	A	-312	-47	---

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE III. Application data for shield terminating ferrule dies - Continued.

Inner conductor insulation diameter range		Inner ferrule part number MS21981	Outer conductor shield O.D.		To crimp uninsulated outer ferrule part number MS21980 1/	Use		To crimp insulated outer ferrule part number MS31821 1/	Use	
Max	Min		Max	Min		Die part number M22520/5	Die closure		Die part number M22502/5	Die closure
.197	.177	-205	.256	.238	-327	-37	A	-327	-23	---
.211	.191	-219	.252	.234	-327	-37	A	-327	-23	---
.217	.197	-225	.269	.251	-348	-35	A	-348	-23	---
.224	.204	-232	.286	.266	-348	-35	A	-348	-23	---
.242	.222	-250	.297	.277	-359	-33	A	-359	-23	---
.242	.222	-250	.312	.292	-375	-47	---	-375	-49	---
.253	.233	-261	.308	.288	-375	-47	---	-375	-49	---
.258	.238	-266	.308	.288	-375	-47	---	-375	-49	---
.267	.247	-275	.312	.292	-375	-47	---	-375	-49	---
.267	.247	-275	.342	.322	-405	-23	---	-405	-51	---
.273	.253	-281	.323	.303	-405	-23	---	-405	-51	---
.279	.259	-287	.344	.324	-415	-23	---	-415	-51	---
.289	.269	-297	.339	.319	-415	-23	---	-415	-51	---
.304	.284	-312	.334	.314	-415	-23	---	-415	-51	---
.304	.284	-312	.364	.339	-460	-53	---	-460	-31	---
.340	.280	-348	.384	.325	-460	-53	---	-460	-31	---
.367	.347	-375	.448	.428	-500	-21	---	-500	-27	---

1/ Use one number 20 number 22 grounding wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
1-0016				35	A	73,83
1-0017				61		74
1-0018				61		75
1-0019						78
1-0021				61		65
1-0022				61		86
1-0023				35	A	6
1-0024				19	A	62
1-0027				35	A	2
1-0501	1-10	-13	1-50	61	A	75,86,127
1-0502	1-10	-13	1-51	61	A	74
1-0503	1-11	-13	1-52	19	B	60,128
2-0019				35	A	73,83
2-0020				61		74
2-0021				61		75
2-0022						78
2-0024				61		65
2-0025				61		86
2-0026				35	A	6,62
2-0039				61		77
2-0040				35	A	2
2-0027				35	A	73,83
2-0028				61		74
2-0029				61		75
2-0030				61		77
2-0034				61		86
2-0041				61		65
2-0042				35		6,62
2-0043				35	A	2
2-0501	2-10	-13	2-50	61	A	75,86,127
2-0502	2-10	-13	2-51	61	A	74
2-0503	2-11	-13	2-52	19	B	60,128
2-0511	2-10	-13	2-50	61	A	75,86,127
2-0512	2-10	-13	2-51	61	A	74
2-0513	2-11	-13	2-52	19	B	60,128
3-0013				35	A	73,83
3-0014				61		74
3-0015				61		75
3-0016						78
3-0018				61		65
3-0019				61		86
3-0020				35	A	6,62
3-0021				61		77
3-0023				35	A	2
3-0501	3-10	-14	3-50	61	A	75,86,127
3-0502	3-10	-14	3-51	61	A	74
3-0503	3-11	-14	3-52	19	B	60,128

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
5-0004				61		74
5-0005				61		75
5-0013				35	A	2
5-0014				35	A	6,62
5-0015				61		65
5-0016				35	A	73,83
5-0017				61		77
5-0018				61		86
5-0501	5-10	-13	5-50	61	A	75,86,127
5-0502	5-10	-13	5-51	61	A	74
5-0503	5-11	-13	5-52	19	B	60,128
6-0027				35	A	73,112
6-0028				61		74,65
6-0029				61		75
6-0030				61		86
6-0031				35	A	6
6-0032				61		92
7-0011				61		74,75
7-0012				61		75
7-0013				61		86
7-0014				35	A	73,112
7-0015				35	A	6
7-0016				61		92
8-0010				61		74,65
8-0011				61		75
8-0012				61		86
8-0013				35	A	73,112
8-0014				61		92
10-0006				61		74,65
10-0007				61		75
10-0008				61		86
10-0009				61		92
11-0012				35	A	73,112
11-0013				61		65,74
11-0014				61		75
11-0015				61		86
11-0016				35	A	6
11-0017				61		92
16-0013				19	B	28,111
16-0014				19	B	60,84
16-0015				19	A	29,30,97
16-0016				41	B	54
16-0017				19	A	90
16-0020				19	A	119
16-0501	16-12	-12	16-50	41	B	54
16-0502	16-11	-12	16-50	41	B	95
16-0503	16-10	-12	16-51	19	B	60,128

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
17-0013				19	B	28,111
17-0014				19	B	60,84
17-0015				19	A	29,20,97
17-0016				41	B	54
17-0017				19	A	90
17-0020				19	A	110
17-0022				35	B	54
17-0501	17-12	-12	17-50	41	B	54
17-0502	17-11	-12	17-50	41	B	95
17-0503	17-10	-12	17-51	19	B	60,128
18-0013				19	B	28,111
18-0014				19	B	84,060
18-0015				19	A	29,30,97
18-0016				41	B	054
18-0017				19	A	90
18-0020				19	A	110
18-0021				35	B	113,119
18-0501	18-12	-12	18-50	41	B	54
18-0502	18-11	-12	18-50	41	B	95
18-0503	18-10	-12	18-51	19	B	60,128
19-0006				19	B	28,111
19-0007				19	B	84,60,128
19-0010				19	A	110
19-0011				19	A	97,29,30,90
19-0501	19-12	-12	19-50	41	B	54
19-0502	19-11	-12	19-50	41	B	95
19-0503	19-10	-12	19-51	19	B	60,128
20-0006				19	B	28,111
20-0007				19	A	84,60,128
20-0010				19	A	110
20-0011				19	A	29,30,90,97
20-0501	20-12	-12	20-50	41	B	54
20-0502	20-11	-12	20-50	41	B	95
20-0503	20-10	-12	20-51	19	B	60,128
26-0010				19	B	28,111
26-0011				19	B	84,60,128
26-0012				19	A	29,30,97
26-0013				41	B	54
26-0014				19	A	90
26-0021				19	A	110
26-0022				35	B	113,119
26-0023				41	B	95
26-0501	26-12	-12	26-50	41	B	54
26-0502	26-11	-12	26-50	41	B	95
26-0503	26-10	-12	26-51	19	B	60,128

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
27-0010				19	B	28,111
27-0011				19	B	84,60,128
27-0012				19	A	29,30,97
27-0013				41	B	54
27-0014				19	A	90
27-0021				19	A	110
27-0022				35	B	113,119
27-0023				41	B	95
27-0501	27-12	-12	27-50	41	B	54
27-0502	27-11	-12	27-50	41	B	95
27-0503	27-10	-12	27-51	19	B	60,128
28-0010				19	B	28,111
28-0011				19	B	84,60,128
28-0012				19	A	29,30,97
28-0013				41	B	54
28-0014				19	A	90
28-0021				19	A	110
28-0022				35	B	113,119
28-0023				41	B	95
28-0501	28-12	-12	28-50	41	B	54
28-0502	28-11	-12	28-50	41	B	95
28-0503	28-10	-12	28-51	19	B	60,128
29-0010				19	B	28,111
29-0011				19	B	60,84,128
29-0012				19	A	29,30,97
29-0013				41	B	54
29-0014				19	A	90
29-0021				19	A	110
29-0022				35	B	113,119
29-0501	29-12	-12	29-50	41	B	54
29-0502	29-11	-12	29-50	41	B	95
29-0503	29-10	-12	29-51	19	B	60,128
30-0010				19	B	28,111
30-0011				19	B	60,84,128
30-0012				19	A	29,30,97
30-0013				41	B	54
30-0014				19	A	90
30-0021				19	A	110
30-0022				35	B	113,119
30-0501	30-12	-12	30-50	41	B	54
30-0502	30-11	-12	30-50	41	B	95
30-0503	30-10	-12	30-51	19	B	60,128
35-0010				35	A	73,112
35-0011				61		65,74
35-0012				61		75,86
35-0013				61		6,62
35-0014				61		92
35-0501	35-10	-14	35-50	61	A	75,86,127
35-0503	35-11	-14	35-51	19	B	60,128

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the currenversion before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
36-0007				61		65,74
36-0008				61		75,86
36-0009				35	A	73,112
36-0010				61		6,62
36-0027				61		92
36-0501	36-10	-14	36-50	61	A	75,86,127
36-0503	36-11	-14	36-51	19	B	60,128
38-0006				61		65,74
38-0007				61		75,86
38-0008				35	A	73,112
38-0018				61		92
38-0501	38-10	-14	38-50	61	A	75,86,127
38-0503	38-11	-14	38-51	19	B	60,128
39-0004				61		65,74
39-0005				61		75,86
39-0009				61		92
39-0501	39-10	-13	39-50	61	A	75,86,127
39-0503	39-11	-13	39-51	19	B	60,128
40-0014				35	A	73,112
40-0015						65,74
40-0016						75,86
40-0017						77
40-0018						78
40-0021						6,62
40-0022						92
40-0501	40-10	-14	40-50	61	A	75,86,127
40-0503	40-11	-14	40-51	19	B	60,128
55-3025				33	B	93,169
55-4025				33	B	
55-3026				35	B	113,119
55-4026						172,173
55-3027				41	B	54
55-4027						157
55-3028				19	B	28,111
55-4028						155,170
55-3502	55-10	-15	55-50	19	B	60,128
55-4502	55-11	-15	55-50	19	B	60,128
56-3025				33	B	93,169
56-4025				33	B	
56-3026				35	B	113,119,172, 173
56-4026				35	B	
56-3027				41	B	54,157
56-4027				41	B	
56-3028				19	B	60,84,158,167
56-4028				19	B	
56-3029				19	B	
56-3502			56-50	19	B	60,128
56-4502	None		56-50	19	B	60,128

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
57-3025				33	B	93,169
57-4025				33	B	
57-3026				35	B	119,173
57-4026				35	B	113,172
57-3027				41	B	54,157
57-4027				41	B	
57-3028				19	B	60,84
57-4028				19	B	158,167
57-3029				19	B	28,111
57-4029				19	B	155,170
57-3502	57-10	-15	57-50	19	B	60,128
57-4502	57-10	-15	57-50	19	B	60,128
58-3025				33	B	93,169
58-4025				33	B	
58-3026				35	B	173
58-4026				35	B	113,172
58-3027				41	B	54
58-4027				41	B	157
58-3028				19	B	60,84,158,167
58-4028				19	B	
58-3029				19	B	28,111,155
58-4029				19	B	170
58-4502	58-10	-15	58-50	19	B	60,128
59-3025				33	B	93,169
59-4025				33	B	
59-3026				35	B	119,113
59-4026				35	B	172,173
59-3027				41	B	54,157
59-4027				41	B	
59-3028				19	B	60,84,158,167
59-4028				19	B	
59-3029				19	B	28,111,155
59-4029				19	B	170
59-3502	59-10	-15	59-50	19	B	60,128
59-4502	59-10	-15	59-50	19	B	60,128
64-0010				61		74,163
64-0011				61		75,164
64-0012				61		86
64-0013				61		112,171
64-0014				61		73,162
64-0015				61		6
64-0016				61		65,159
65-0010				19	B	28,111,155, 170
65-0011				19	B	60,84,158,167
65-0012				19	A	29,30,97,110
65-0013				41	B	54,157
65-0014				19	A	90

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
66-0010				19	B	28,111,155, 170
66-0011				19	B	60,84,158,167
66-0012				19	A	29,30,97,110
66-0013				41	B	54,157
66-0014				19	A	90
67-0011				33	B	93,169
67-0012				35	B	92,113,119, 172,173
68-0011				33	B	93,169
68-0012				35	B	94,113,119, 172,173
69-0011				33	B	93,169
69-0012				35	B	92,113,119, 172,173
70-0011				33	B	93,169
70-0012				35	B	92,113,119, 172,173
73-0011				33	B	93,169
73-0012				35	B	94,113,119, 172,173
74-0011				33	B	93,169
74-0012				35	B	94,113,119, 172,173
74-0013				41	B	95
75-0011				33	B	93,169
75-0012				35	B	94,113,119, 172,173
75-0013				41	B	95
76-0011				33	B	93,169
76-0012				35	B	94,113,119, 172,173
76-0013				41	B	95
84-0013				35	A	112,171
84-0014				35	A	162,173
84-0015				61		74,163
84-0016				61		75,164
84-0017				61		86
84-0018				61		6
84-0019				61		65,159

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Application data for coaxial radio frequency, class 2 crimp type series connector dies - Continued.

MIL-C-39012 connector part number M39012/	To crimp inner contact part number M39012/	Use M22520/1	To crimp outer ferrule part number M39012/	Use		Cables accommodated (ref) MIL-C-17/
				die part number M22520/5-	die closure	
85-0013				35	A	112,171
85-0014				35	A	162,173
85-0015				61		74,163
85-0016				61		75,164
85-0017				61		86
85-0018				61		6
85-0019				61		65,159
86-0013				35	A	112,171
86-0014				35	A	162,173
86-0015				61		74,163
86-0016				61		75,164
86-0017				61		86
86-0018				61		6
86-0019				61		65,159
88-0010				19	B	28,111,155, 170
88-0011				19	B	60,84,158,167
88-0012				19	A	29,30,97,110
88-0013				41	B	54,157
88-0014				19	A	90
89-0010				19	B	28,111,155, 170
89-0011				19	B	60,84,158,167
89-0012				19	A	29,30,97,110
89-0013				41	B	54,157
89-0014				19	A	90

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE V. Application data for insulated terminal lug, splice and end cap dies.

MS standard or specification sheet	Type of connection	Size	Use M22520/5-01 basic tool with die part number M22520/5
MS17143	Terminal	22-18 16-14 12-10	-100 -100 -100
MS25036 MIL-T-7928/4	Terminal	26-24 22-18 16-14 12-10	-100 -100 -100 -100
MIL-T-7928/3	Splice	26-24 22-18 16-14 12-10	-100 -100 -100 -100
MS25274	End cap	26-24 22-18 16-14 12-10	-100 -100 -100 -100
MS27429	Splice	22-18 16-14 12-10	-100 -100 -100
MIL-T-7928/1	Terminal	26 26 14 12 10	-100 -100 -100 -100 -100
MIL-T-7928/2	Terminal	22 22 14 12 10	-100 -100 -100 -100 -100
MIL-T-7928/5	Splice	26-24 24-20 22-18 16-14 12-10	-101 -101 -100 -100 -100
MIL-S-81824/1	Splice	26-20 20-16 16-12	-103 -103 -102
MIL-S-81824/2	Splice	26-20 20-16 16-12	-101 -100 -100 use 26-14 die closure

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. QUALIFICATIONS FOR M22520/5-104 SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-22520, TABLE VII, TYPE 2 (DIES), EXCEPT THE DIELECTRIC STRENGTH TEST PER REQUIREMENT PARAGRAPH 3.5.12 AND TEST PARAGRAPH 4.7.12 OF MIL-C-22520 SHALL BE PERFORMED PRIOR TO TENSILE STRENGTH (REQUIREMENT PARAGRAPH 3.5.11 AND TEST PARAGRAPH 4.7.11).

2. QUALIFIED CONTACTS PER MIL-C-0039029/95(USAF) AND MIL-C-0039029/96 (USAF) OR APROVED EQUIVALENT CONTACTS AUTHORIZED BY THE QUALIFYING ACTIVITY SHALL BE USED FOR QUALIFYING M22520/5-104.

3. M22520/104 DIES AND ASSOCIATED PARTS SHALL BE MADE OF CORROSION RESISTANT STEEL.

4. M22520/104 DIES FINISH SHALL BE OF BLACK OXIDE IN ACCORDANCE WITH MIL-C-13924.

TABLE VI. APPLICATION DATA FOR TRIAXIAL CONTACT DIES.


MS Standard or Specification Sheet	Type of contact	Size	Use M22520/5-01 Basic tool with die part number M22520/5-104
MIL-C-39029/95	Socket	8	-104
MIL-C-39029/96	Pin	8	-104

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

TABLE VII. QUALIFICATION INSPECTION FOR M22520/104 DIES

EXAMINATION OR TEST	REQUIREMENT PARAGRAPH	TEST PARAGRAPH	TYPE 2
			DIES (4.3.1.2(b) AND (C))
VISUAL AND MECHANICAL EXAMINATION	3.1, 3.3, 3.3.1 3.3.2, 3.4, 3.6 3.6.1, 3.6.2, 3.6.3, 3.7	4.5	X
INSPECTION GAGING	3.5.1	4.7.1.1	X
IN-SERVICE GAGING	3.5.1	4.7.1.2	X
DEFORMATION OF CRIMPED CONNECTION	3.5.7	4.7.7	X
CRACKING OF CRIMPED CONNECTION	3.5.8	4.7.8	X
AXIAL CONCENTRICITY (STRAIGHTNESS)	3.5.9	4.7.9	X
VOLTAGE DROP	3.5.10	4.7.10	X
TENSILE STRENGTH	3.5.11	4.7.11	X
DIELECTRIC STRENGTH	3.5.12	4.7.12	X
COMPRESSION FORCE	3.5.6	4.7.6	X
SALT SPRAY (CORROSION)	3.5.16	4.7.16	
VISUAL AND MECHANICAL EXAMINATION	3.1, 3.3, 3.3.1, 3.3.2, 3.4, 3.6, 3.6.1, 3.6.2 3.6.3, 3.7	4.5	X

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:45Z
Check the source to verify that this is the current version before use.

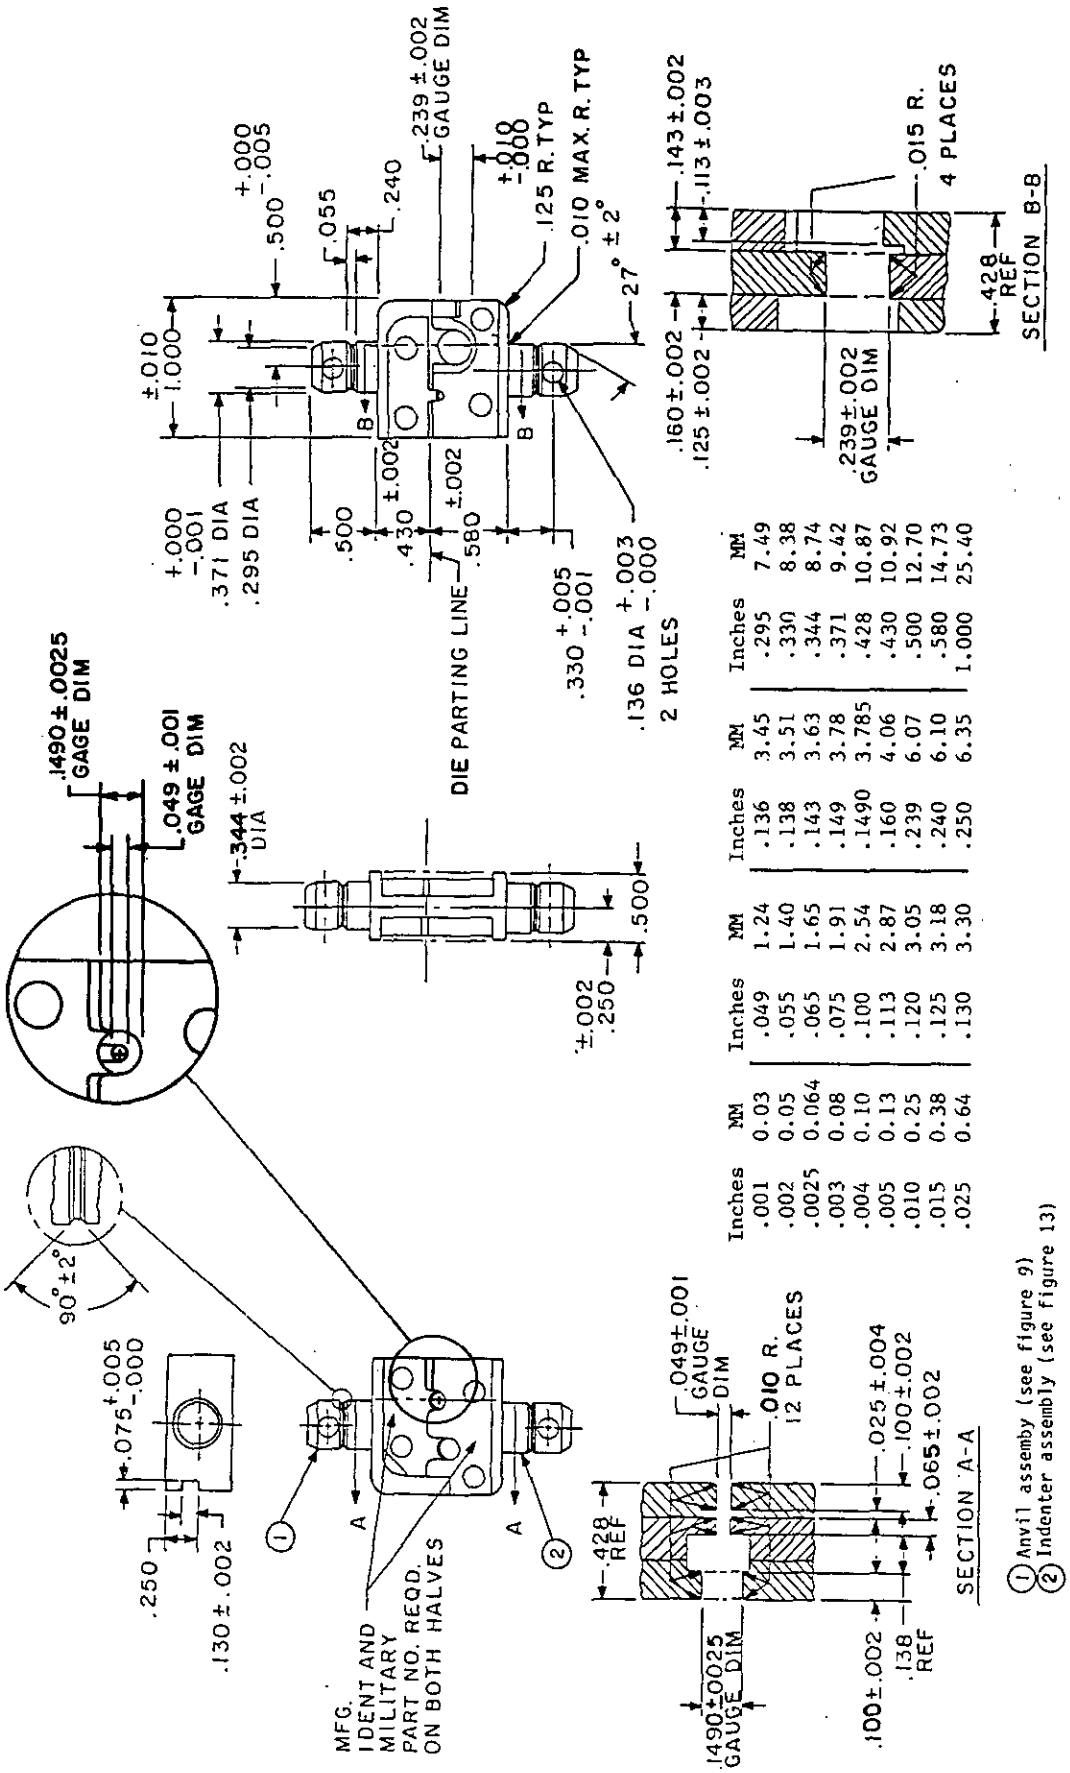

Inches	MM
.001	0.03
.002	0.05
.0025	0.064
.003	0.08
.004	0.10
.005	0.13
.010	0.25
.015	0.38
.025	0.64

Inches	MM
.049	1.24
.055	1.40
.065	1.65
.075	1.91
.100	2.54
.113	2.87
.120	3.05
.125	3.18
.130	3.30

Inches	MM
.136	3.45
.138	3.51
.143	3.63
.149	3.78
.1490	3.785
.160	4.06
.239	6.07
.240	6.10
.250	6.35

Inches	MM
.295	7.49
.330	8.38
.344	8.74
.371	9.42
.428	10.87
.430	10.92
.500	12.70
.580	14.73
1.000	25.40


① Anvil assemby (see figure 9)
② Indenter assembly (see figure 13)

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. All radii to be blend radii.

PART NO.
M22520/5-104

FIGURE 8. M22520/5-104 die dimensions.


Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the current version before use.

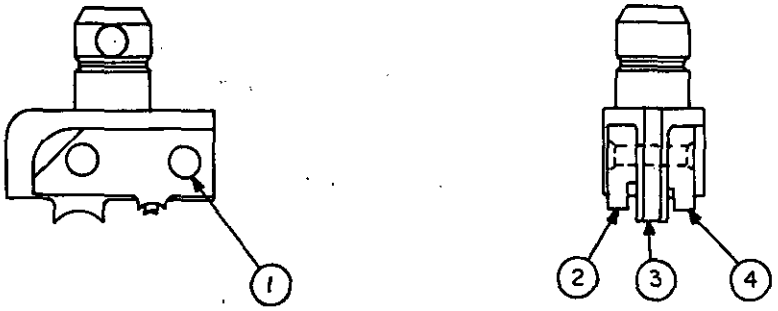

(1) Rivet.
(2) Anvil-center conductor (see figure 10).
(3) Anvil (see figure 11)
(4) Anvil-contact support (see figure 12).

FIGURE 9. Anvil assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

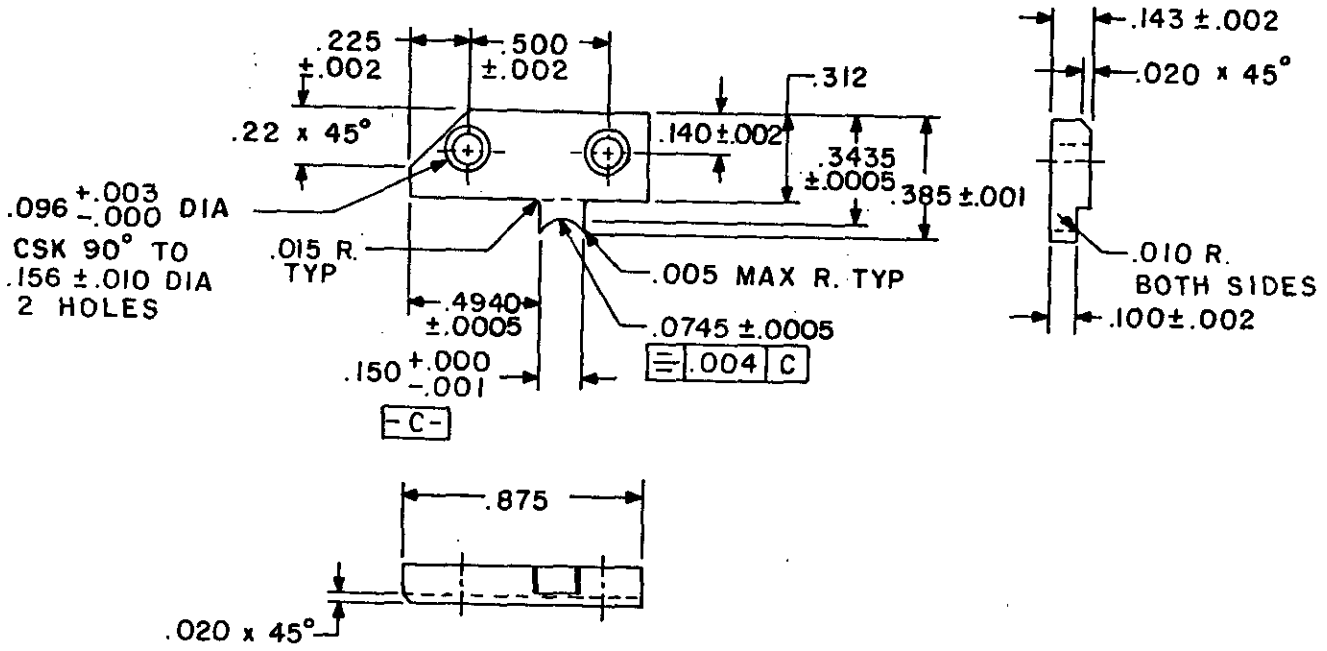


Inches	MM	Inches	MM
.0005	0.013	.143	3.63
.001	0.03	.150	3.81
.002	0.05	.156	3.96
.003	0.08	.22	5.59
.005	0.13	.225	5.72
.010	0.25	.312	7.92
.015	0.38	.3435	8.725
.020	0.51	.385	9.78
.0745	1.892	.4940	12.548
.096	2.44	.500	12.70
.100	2.54	.875	22.23
.140	3.56		

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. 24 blend flaws finish on entire crimping surface.
5. All radii to be blend radii.

FIGURE 10. Anvil-center conductor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

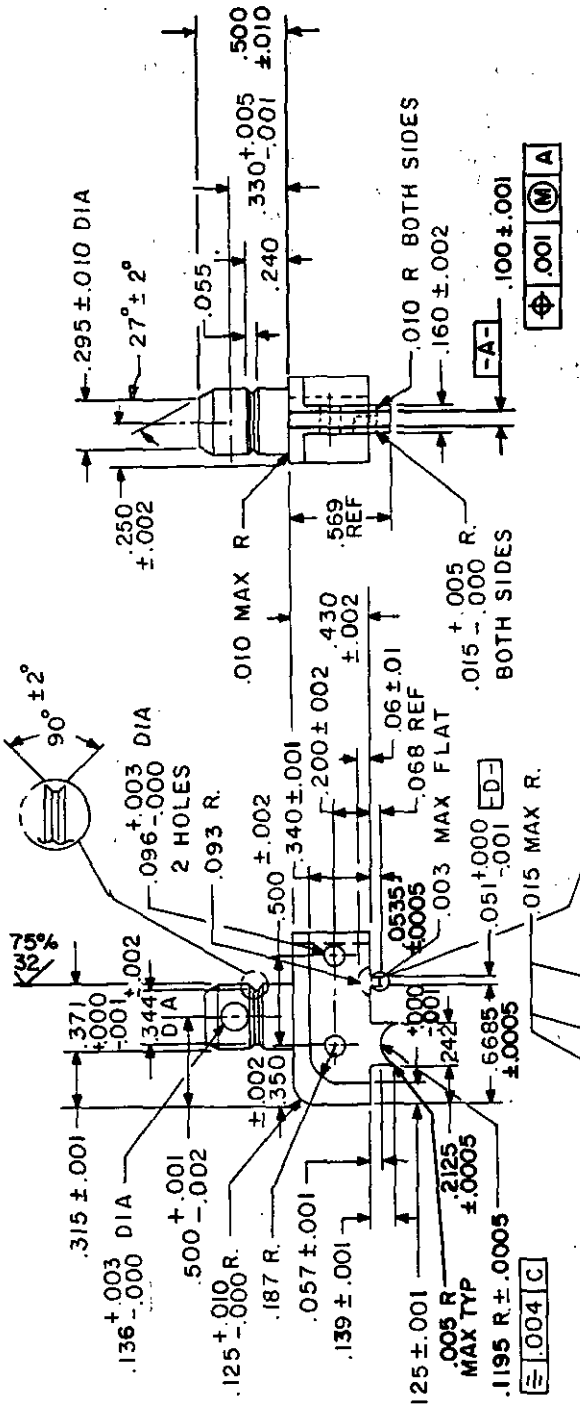


Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.0005	0.013	.055	1.40	.100	2.54	.187	4.75	.340	8.64
.001	0.03	.057	1.45	.1195	3.035	.200	5.08	.344	8.74
.002	0.05	.06	1.52	.125	3.18	.2125	5.398	.350	8.89
.003	0.08	.065	1.65	.130	3.30	.240	6.10	.371	9.42
.005	0.13	.068	1.73	.136	3.45	.242	6.15	.430	10.92
.010	0.25	.075	1.91	.139	3.53	.250	6.35	.500	12.70
.015	0.38	.078	1.98	.159	4.04	.295	7.49	.569	14.45
.0245	0.622	.093	2.36	.160	4.06	.315	8.00	.6685	16.980
.051	1.30	.096	2.44	.170	4.32	.330	8.38	1.000	25.40
.0535	1.359								

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. 24 blend finish on entire crimping surface, flaws
5. All radii to be blend radii.

FIGURE 11. Anvil.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

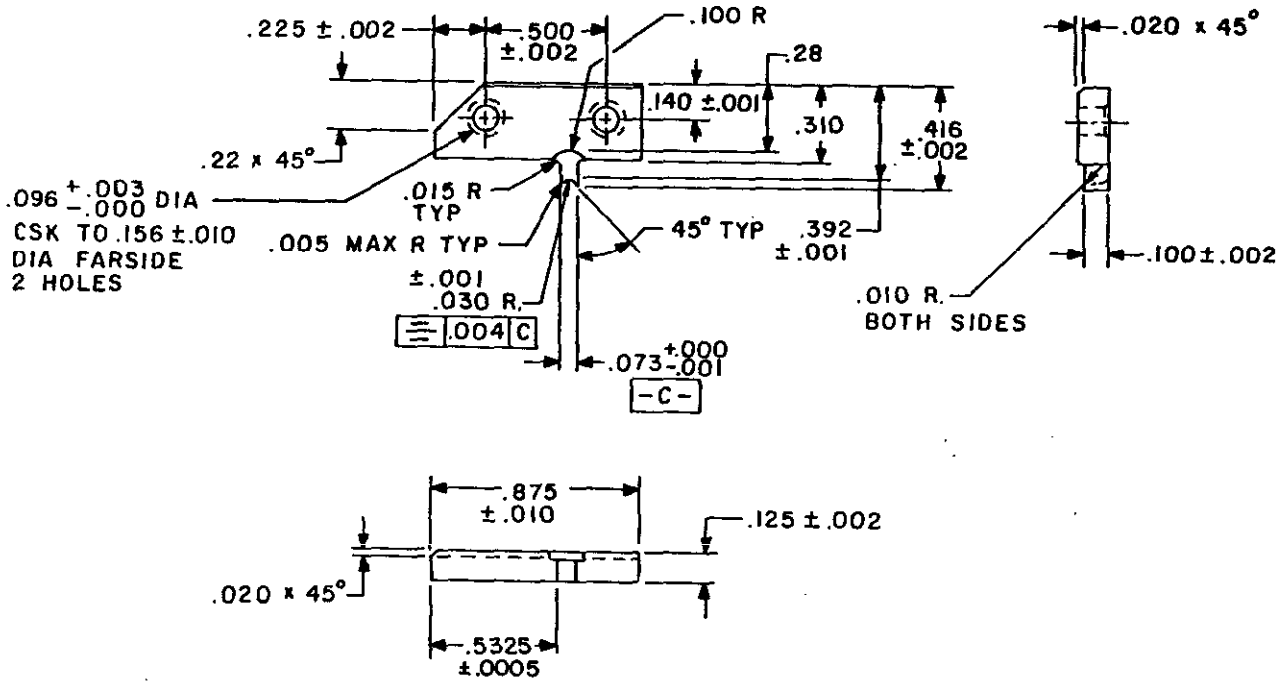


Inches	MM	Inches	MM	Inches	MM
.0005	0.013	.030	0.76	.225	5.72
.001	0.03	.073	1.85	.28	7.11
.002	0.05	.096	2.44	.310	7.87
.003	0.08	.100	2.54	.392	9.96
.005	0.13	.125	3.18	.416	10.57
.010	0.25	.140	3.56	.500	12.70
.015	0.38	.156	3.96	.5325	13.526
.020	0.51	.22	5.59	.875	22.23

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. 90% 32 finish on entire surface.
5. All radi to be blend radii.

FIGURE 12. Anvil-contact support.


Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:45Z
Check the source to verify that this is the current version before use.

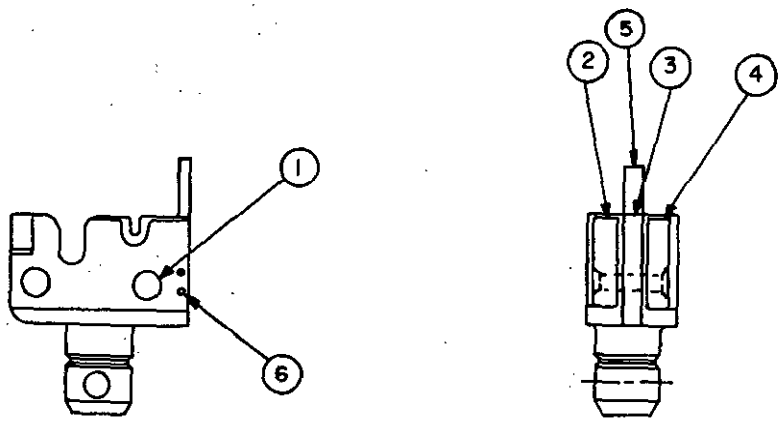

1. Rivet.
2. Indenter-contact support (see figure 14).
3. Indenter (see figure 15).
4. Indenter-center conductor (see figure 16).
5. Guide, die (see attached figure).
6. Pin, spiral spring.

FIGURE 13. Indenter assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

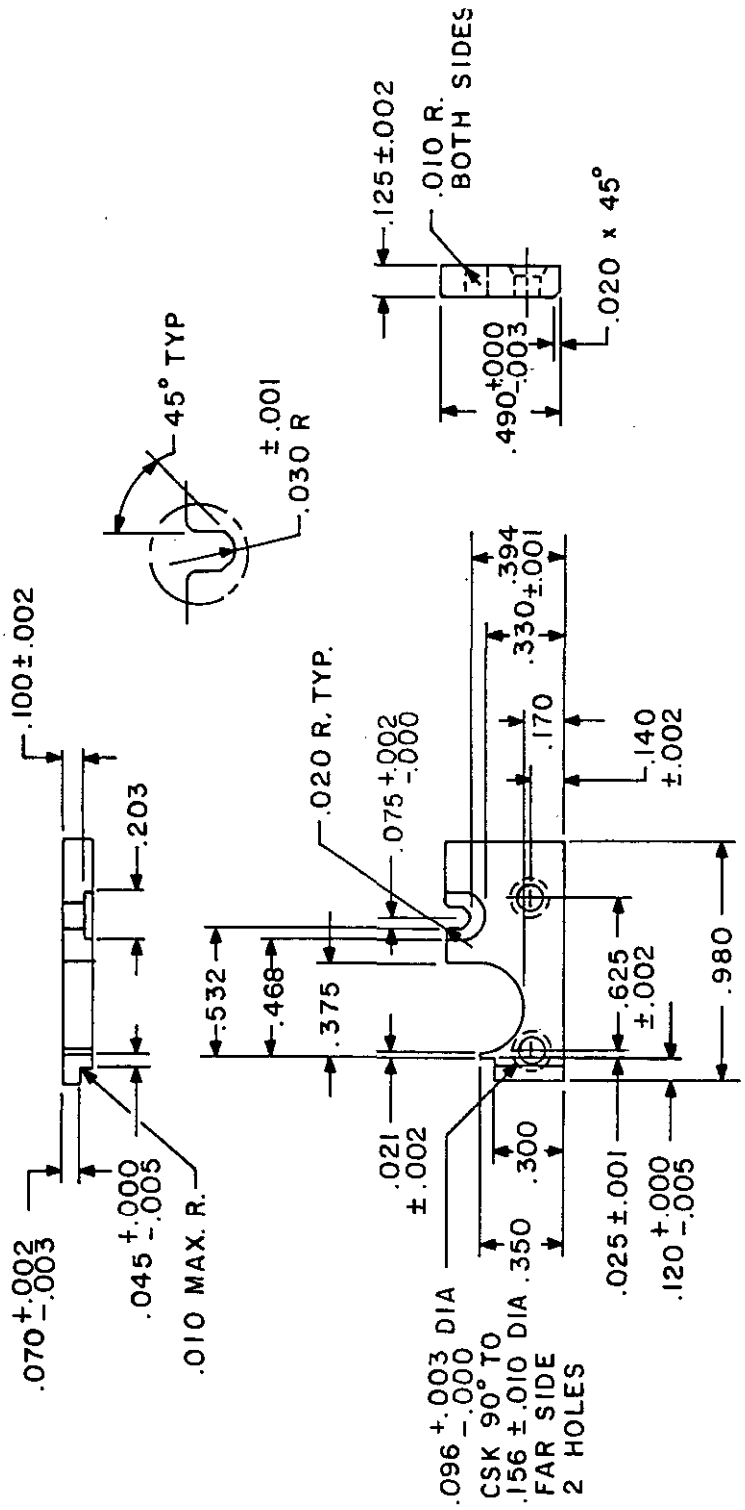


Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.001	0.03	.021	0.53	.096	2.44	.170	4.32	.394	10.01
.002	0.05	.025	0.64	.100	2.54	.203	5.16	.468	11.89
.003	0.08	.030	0.76	.120	3.05	.300	7.62	.490	12.45
.005	0.13	.045	1.14	.125	3.18	.330	8.38	.532	13.51
.010	0.25	.070	1.78	.140	3.56	.350	8.89	.625	15.88
.020	0.51	.075	1.91	.156	3.96	.375	9.53	.980	24.89

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. $\sqrt{32}$ finish on entire surface.
5. All radi to be blend radii.

FIGURE 14. Indenter-contact support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

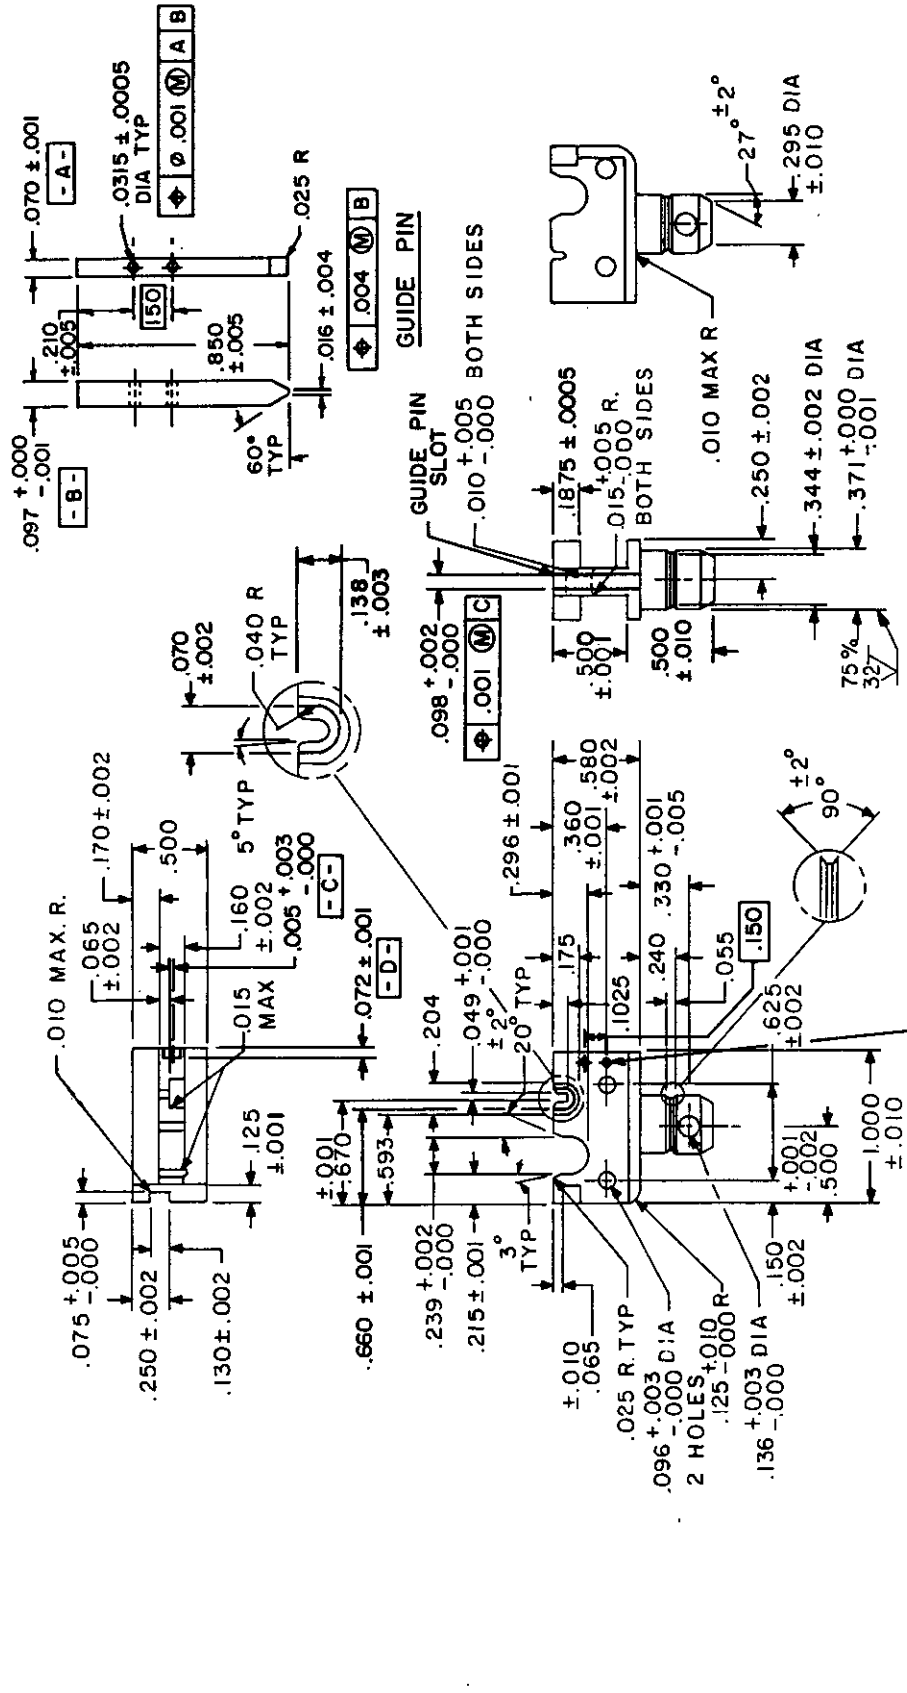

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.0005	0.013	.040	1.20	.100	2.54	.1875	4.763
.001	0.03	.049	1.24	.1025	2.604	.204	5.18
.002	0.05	.055	1.40	.125	3.18	.210	5.33
.003	0.08	.065	1.65	.130	3.30	.215	5.46
.004	0.10	.070	1.78	.136	3.45	.239	6.07
.005	0.13	.072	1.83	.138	3.51	.240	6.10
.010	0.25	.075	1.91	.150	3.81	.250	6.35
.015	0.38	.096	2.44	.160	4.06	.295	7.49
.016	0.41	.097	2.46	.170	4.32	.296	7.52
.025	0.64	.098	2.49	.175	4.45	.330	8.38
.0315	0.800						

Inches	MM
.344	8.74
.360	9.14
.371	9.42
.500	12.70
.580	14.73
.593	15.06
.625	15.88
.660	16.76
.670	17.02
.850	21.59
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. 24 blend finish on entire crimping surface. flaws
5. All radii to be blend radii.
6. Die guide not procurable separately but part of the indenter.

FIGURE 15. Indenter.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:45Z
Check the source to verify that this is the current version before use.

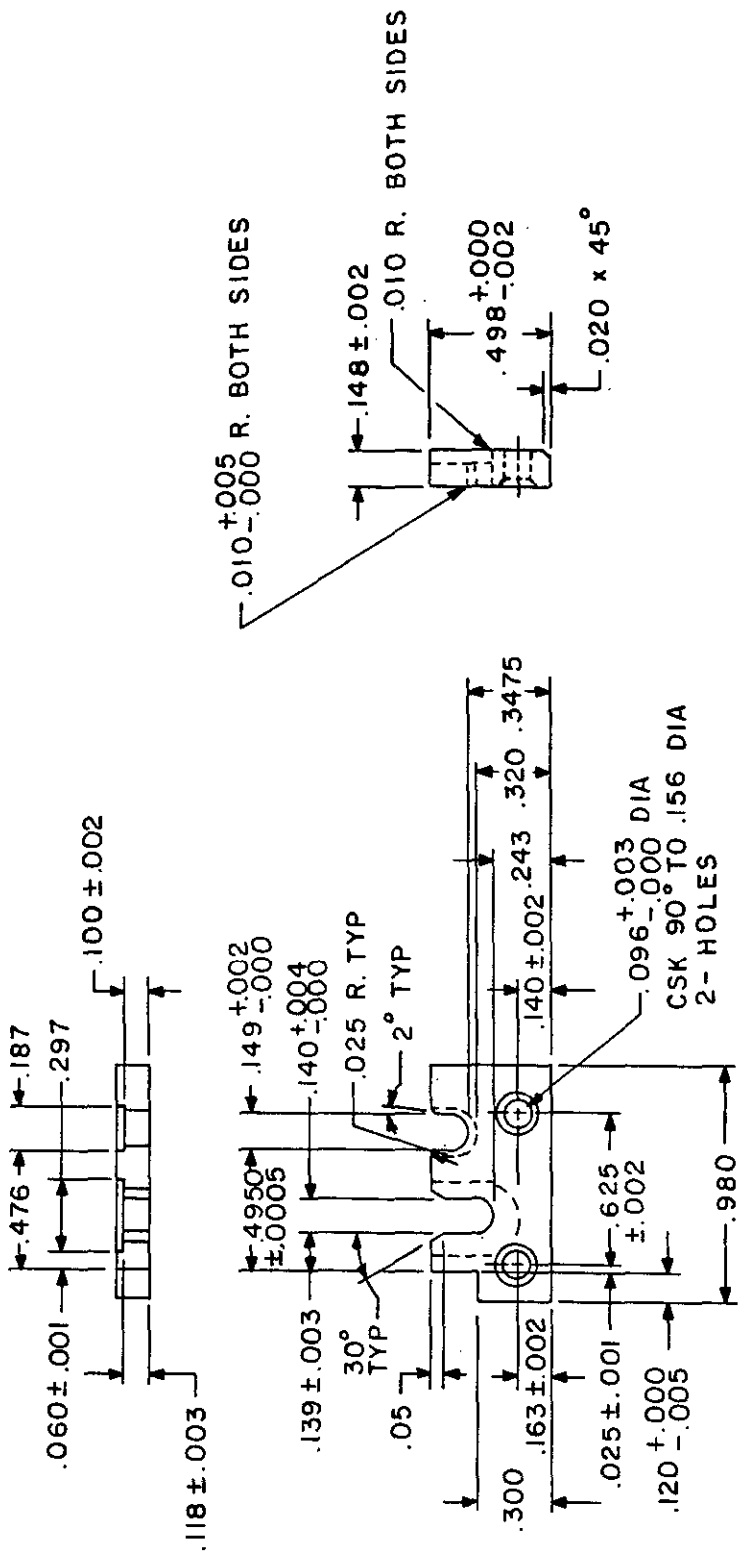


FIGURE 16

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.0005	0.013	.025	0.64	.140	3.56	.300	7.62
.001	0.03	.05	1.27	.148	3.76	.320	8.13
.002	0.05	.060	1.52	.149	3.78	.3475	8.827
.003	0.08	.096	2.44	.156	3.96	.476	12.09
.004	0.10	.100	2.54	.163	4.14	.4950	12.573
.005	0.13	.118	3.00	.187	4.75	.498	12.65
.010	0.25	.120	3.05	.243	6.17	.625	15.88
.020	0.51	.139	3.53	.297	7.54	.980	24.89

NOTES:
1. Dimensions are in inches.
2. Metric Equivalents are given for general information only.
3. Unless otherwise specified, tolerances is ±.005 (0.13mm).
4. 24 blend finish on entire crimping surface. flaws
5. All radii to be blend radii.

FIGURE 16. Indenter-center conductor.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:45Z
Check the source to verify that this is the current version before use.

Supersession data: In addition to MIL-C-22520/5A, the following documents are also superseded by this specification.

a. MIL-C-22910/7B dated 9 July 1973.
b. MIL-T-55619/1 dated 6 March 1970.
c. MS25037E dated 15 February 1971.
d. MS3316B dated 27 August 1970.
e. MS90413D dated 29 September 1972.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Review activities:
Air Force - 11, 17, 19, 80, 90, 99

User activities:
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5120-FB92)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.