INCH-POUND


MIL-C-22520/17B
25 April 1990
SUPERSEDING
MIL-C-22520/17A(AS)
19 March 1976

MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR CRIMP TYPE REMOVABLE CONTACTS, ELECTRIC CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-22520.

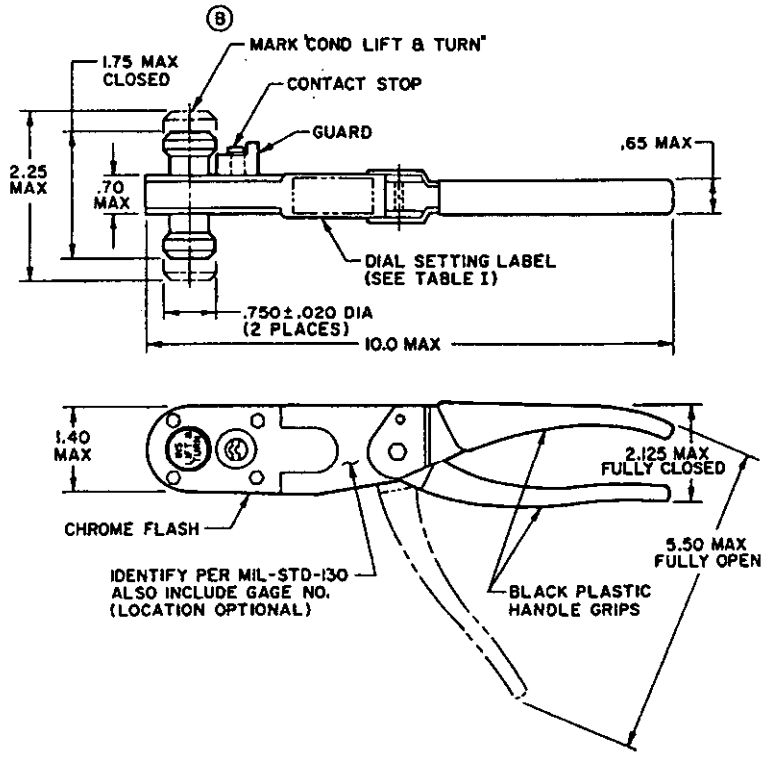

INCH	mm	INCH	mm	INCH	mm
.020	0.51	.750	19.05	2.25	57.15
.031	0.79	1.40	35.56	3.50	88.90
.65	16.50	1.75	44.45	5.50	139.70
.70	17.78	2.125	53.90	10.0	254.00

(B) Denotes change

AMSC N/A
FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

TABLE I. Part number and characteristics.

Basic Tool		Crimping Tool Dial Settings			Crimp Type Contact (See Note 3)
Part No.	For Inspection Gaging Use	Wire Size AWG	Dial Setting For Insulation	Dial Setting For Conductor	
M22520/17-01	M22520/18-1	18 20 22 24 26	6 5 4 3 2	6 5 4 3 2	MIL-C-28731/20
M22520/17-02	M22520/18-2	22 24 26 28 30	6 5 4 3 2	6 5 4 3 2	MIL-C-55302/97-01

NOTES:

1. Unless otherwise specified, dimensions in inches, tolerance: Decimals +.010.
2. Metric equivalents are based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, Rounding-off method.
3. Outline configuration optional within maximum dimensions shown.
4. This tool shall be used to crimp contacts, as indicated in Table I.
5. This tool shall be classified as Class I, Type 2 except the non-removable dies shall produce an elliptical formed crimp.
6. Material - Crimping dies: Oil hardened tool steel heat treated to Rockwell C52-58. Chrome flash finish on crimping surfaces 32 microinches maximum.
   Handle cushioning: Black general purpose PVC .031 minimum thickness.
7. The Government has a royalty-free license under U.S. patent no. 3,751,963 for the benefit of manufacturers of the patented item as disclosed herein either for the Government or for use in equipment to be delivered to the Government.

REQUIREMENTS:

1. The force required to make satisfactory crimps shall not exceed 90 pounds.
2. Operator's instructions to be supplied with tool.
3. The weight of the basic tool shall not exceed 1.5 pounds.
4. Body color shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activity:
Navy - EC

Preparing activity:
Navy - AS
(Project No. 5120-C095)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.