
MIL-C-22520/1C
19 March 1976
SUPERSEDING
MIL-C-22520/1B
9 July 1973

MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR WIRE BARREL SIZES 12 THROUGH 20

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

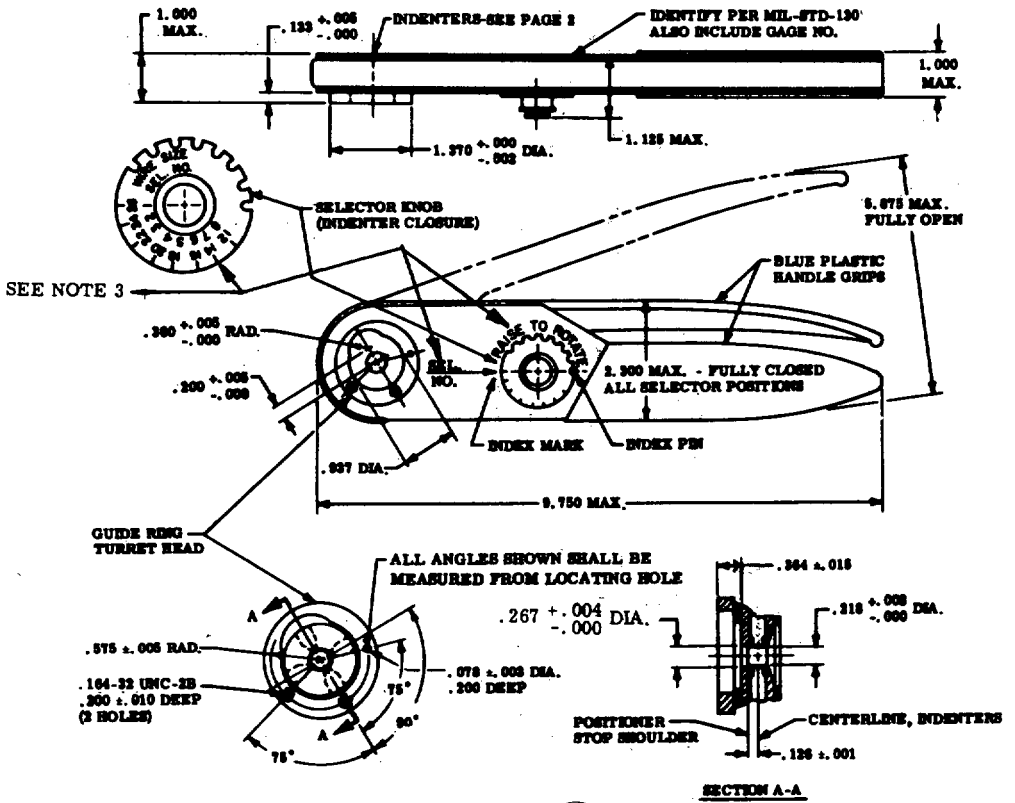

BASIC TOOL

PART NO.	BODY COLOR	FOR INSPECTION GAGING USE	SUPERSEDES	
			INTERCHANGEABLE WITH	NOT INTERCHANGEABLE WITH
M22520/1-01	BLUE	M22520/3-1	M827828	M83191-A M83191-4

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.
2. FOR APPLICABLE TURRETS AND POSITIONERS SEE SUCCEEDING PAGES.
3. STAMP AND WHITE FILL, LETTERING HEIGHT .093.

REQUIREMENTS:

1. THE FORCE REQUIRED TO MAKE SATISFACTORY CRIMPS SHALL NOT EXCEED 90 POUNDS.
2. OUTLINE CONFIGURATION OPTIONAL WITHIN MAXIMUM DIMENSIONS SHOWN.
3. THE WEIGHT OF THE BASIC TOOL SHALL NOT EXCEED 1.5 POUNDS.
4. SIZE 12 IS THE MAXIMUM WIRE SIZE ACCOMMODATED BY THIS TOOL.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

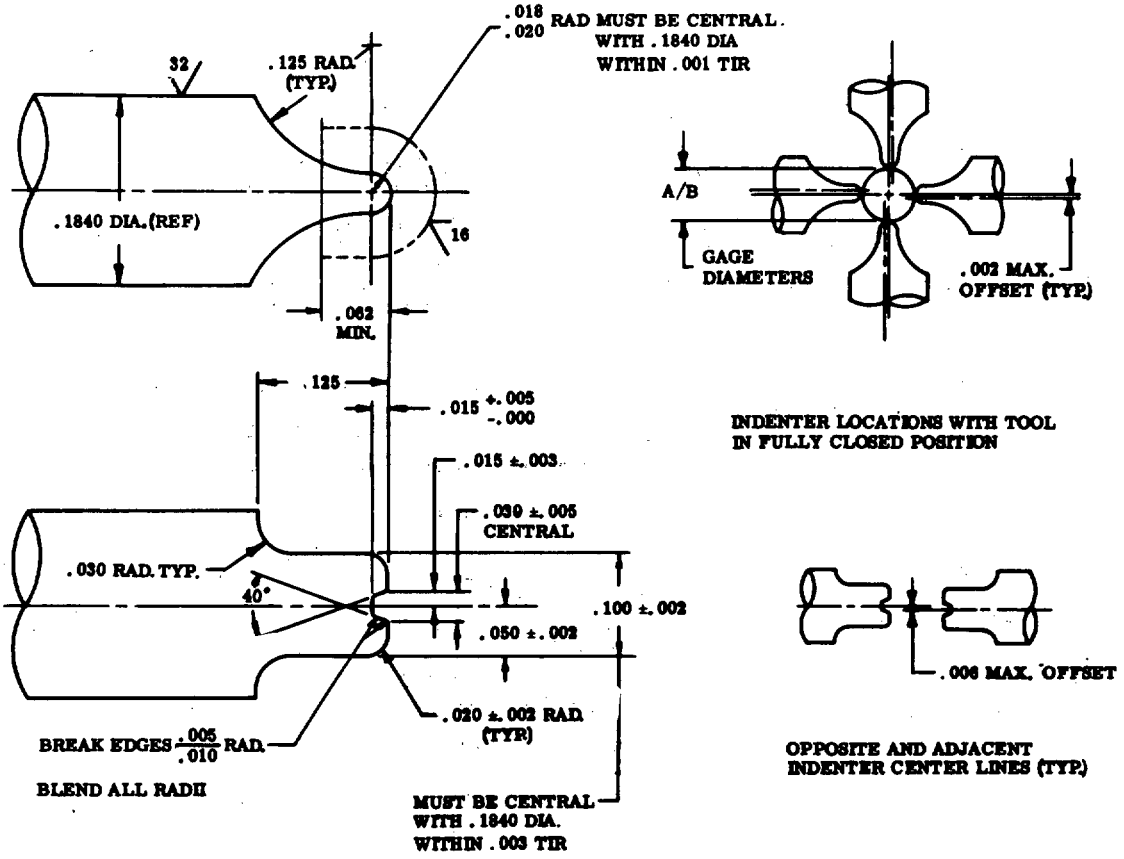

INDENTERS

GAGING LIMITS OF INDENTERS

SELECTOR NUMBER	GAGE - INSPECTION		WIRE SIZE
	A ±.0001 GO DIA.	B ±.0001 NO GO DIA.	
1	.0280	.0330	26
2	.0320	.0370	24
3	.0360	.0410	22
4	.0390	.0440	20
5	.0450	.0500	18
6	.0520	.0570	16
7	.0590	.0640	14
8	.0680	.0730	12


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. MATERIAL: OIL HARDENED TOOL STEEL. HARDEN TO ROCKWELL "C" 58-60.
2. SURFACE TEXTURE SHALL BE AS SHOWN IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

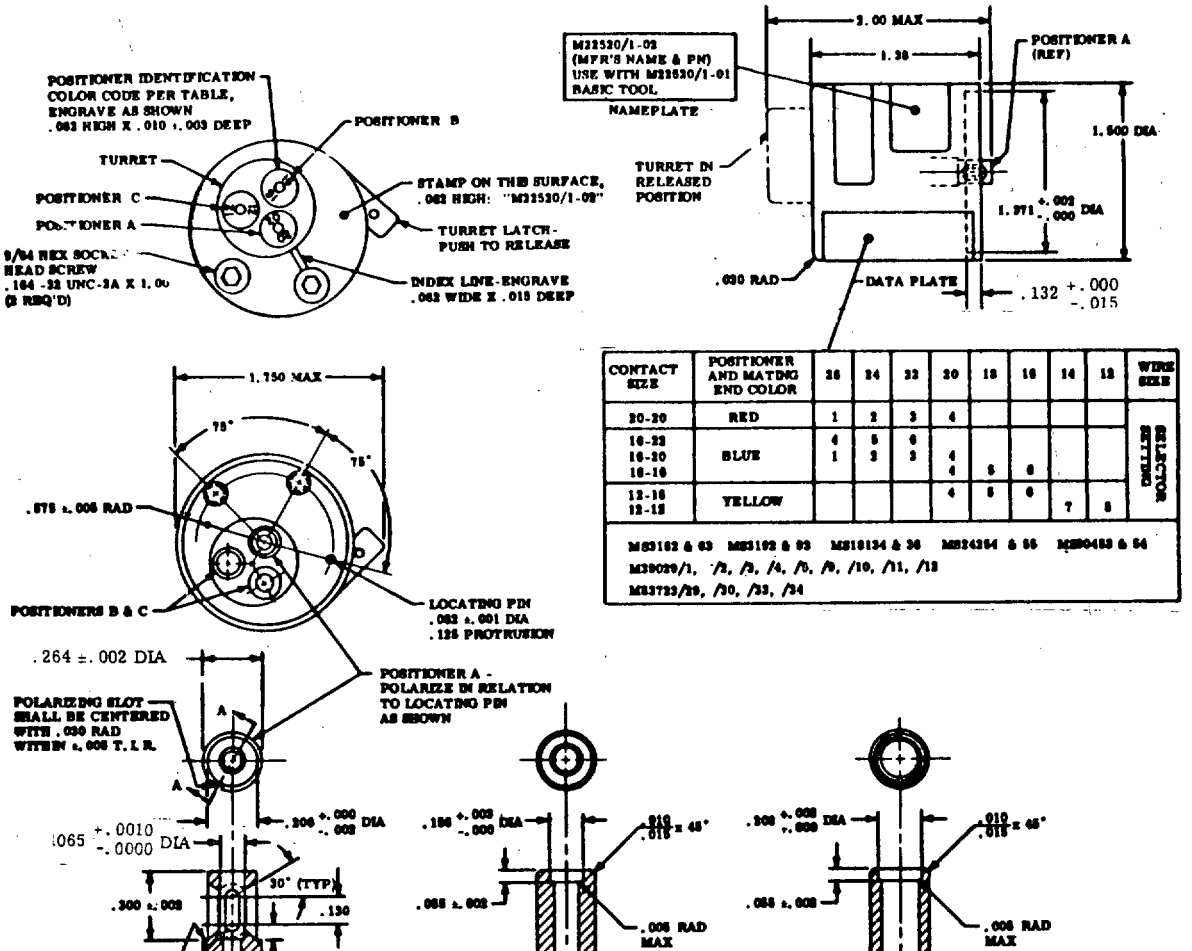

CONTACT SIZE	POSITIONER AND MATING END COLOR	26	24	22	20	18	16	14	12	WIRE SIZE
20-20	RED	1	2	3	4					SELECTOR SETTING
16-22 16-20 16-16	BLUE	4 1	5 2	6 3	4 4	5	6			
12-16 12-12	YELLOW				4	5	6	7	8	

MS3102 & 03 MS3192 & 93 MS18134 & 36 MS24254 & 55 MS90453 & 54
M39029/1, /2, /3, /4, /5, /9, /10, /11, /13
MS3723/29, /30, /33, /34

TURRET HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF.) POSITIONER A COLOR RED	POSITIONER B COLOR BLUE	POSITIONER C COLOR YELLOW	SUPERSEDES INTERCHANGEABLE WITH	SUPERSEDES NOT INTERCHANGEABLE WITH
M22520/1-02	BLUE	MS3101-20-20 MS3103-20-20 MS18134-20 MS18136-20 MS24254-20P MS24255-20S M39029/2-20-20 M39029/3-20-20 M39029/4-20-20 M39029/5-20-20 M39029/9-20-20 M39029/10-20-20 MS3723-33B20 MS3723-34B20	MS3163-16-16 M39029/4-16-20 MS3163-16S-16 M39029/5-16-16 MS3163-16-16 M39029/5-16-20 MS3192-16-16 M39029/11-16-16 MS3193-16-16 M39029/12-16-16 MS24254-16P MS3723-33B16 MS24255-16S MS3723-34B16 M39029/1-16-20 M390453-16-16 M39029/2-16-16 M390453-16-22 M39029/3-16-16 M390454-16-16 M39029/4-16-16 M390454-16-22 M39029/1-14-16	MS3163-12-12 MS3163-12-12S MS3193-12-12 MS3193-12-12 MS24254-12P MS24255-12S M39029/1-12-12 M39029/4-12-12 M39029/4-12-16 M39029/5-12-12 M39029/5-12-16 MS3723-33B12 MS3723-34B12 MS90453-12-12 MS90453-12-16 MS90454-12-12 MS90454-12-16	MS27236-1	MS3101-2T MS3101-16A MS3101-12A MS3101-20A


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 32 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

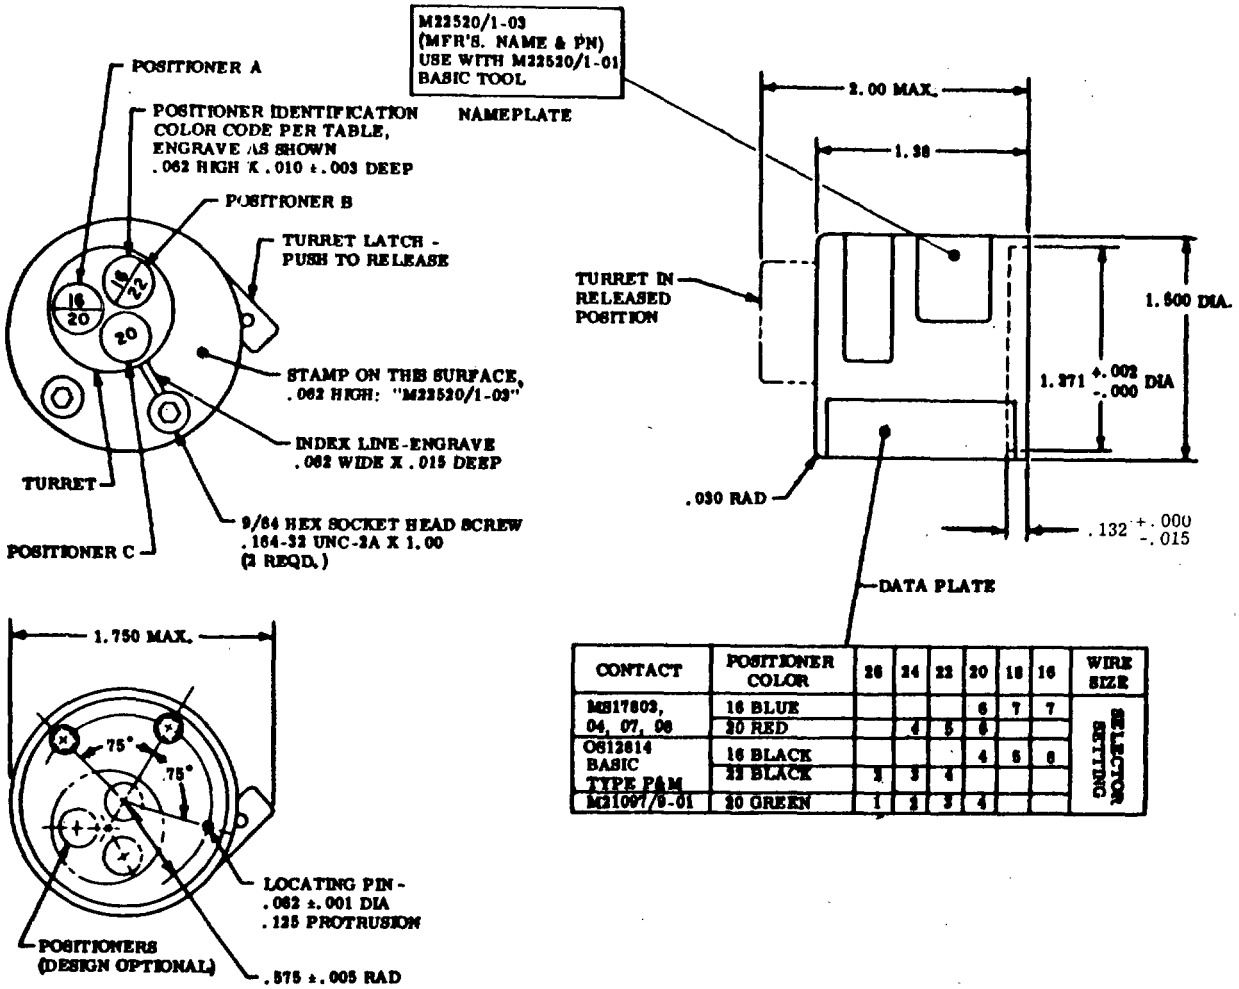

CONTACT	POSITIONER COLOR	26	24	22	20	18	16	WIRE SIZE
MS17603, 04, 07, 08	16 BLUE				6	7	7	SELECTOR SETTING
	20 RED		4	5	6			
C612614 BASIC TYPE P&M	16 BLACK				4	5	6	
	22 BLACK	3	3	4				
M21097/9-01	20 GREEN	1	2	3	4			


TURRET HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)			SUPERSEDES	
		POSITIONER A COLOR BLUE/RED	POSITIONER B COLOR BLACK	POSITIONER C COLOR GREEN	INTERCHANGEABLE WITH	NOT INTERCHANGEABLE WITH
M22520/1-03	BLUE	MIL-C-28748 MS17603-16-20 MS17603-16-16 MS17603-20-20 MS17604-16-20 MS17604-16-16 MS17604-20-20 MS17607-16-16 MS17607-16-20 MS17608-16-16 MS17608-16-20	C612614 BASIC TYPE P & M	M21097/9-01	MS27626-3	MS3191-8T MS3191-20B MS3191-16B MS3191-20C MS3191-16D MS3191-22D


NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 22 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

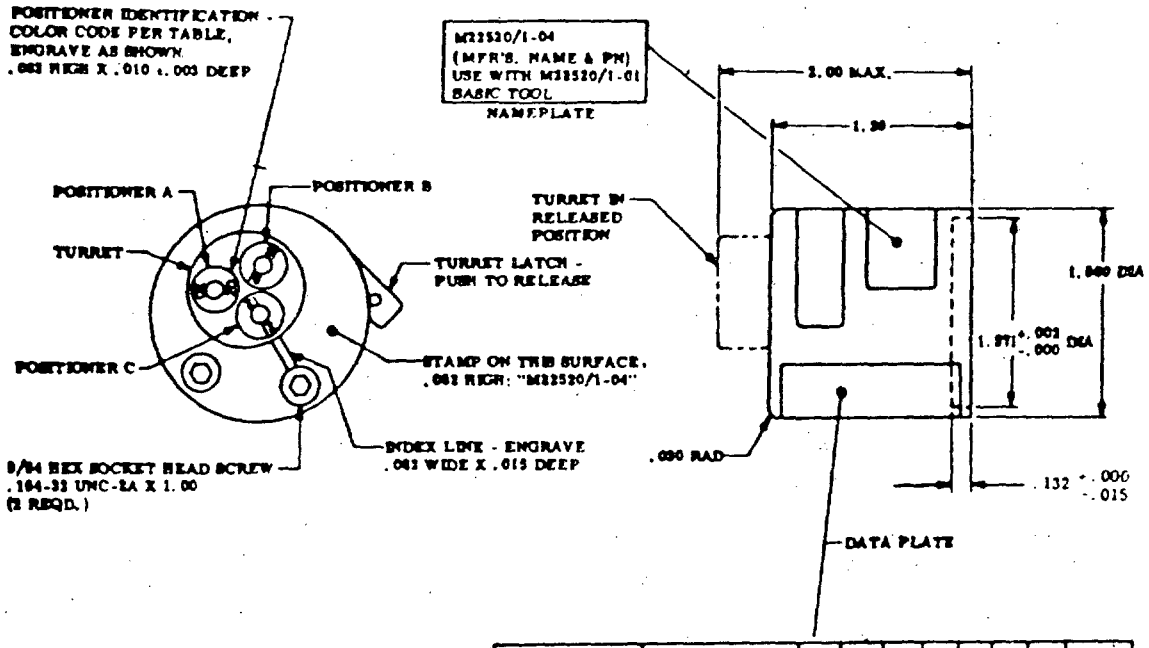

MS27656 MS27490, 91, 92, 93, 94	POSITIONER COLOR	24	22	20	16	16	14	12	WIRE SIZE
-20	RED	1	2	3					#22 STRAND SILICONE RUBBER INSULATED
-16	BLUE			4	5	6			
-12	YELLOW						7	8	

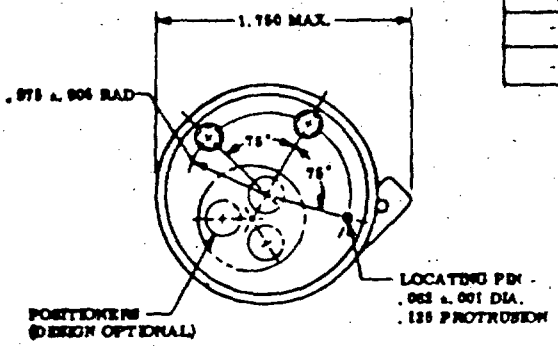


TURRET HEAD ASSEMBLY


PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF.) POSITIONER A COLOR RED	POSITIONER B COLOR BLUE	POSITIONER C COLOR YELLOW	SUPERSEDES INTERCHANGEABLE WITH	SUPERSEDES NOT INTERCHANGEABLE WITH
M22520/1-04	BLUE	MS27490-20 MS27491-20 MS27492-20 MS27493-20 MS27494-20 MS27656-20	MS27490-16 MS27491-16 MS27492-16 MS27493-16 MS27494-16 MS27656-16	MS27490-12 MS27491-12 MS27492-12 MS27493-12 MS27494-12	MS27836-4	MS3101-97

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 22 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .90 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

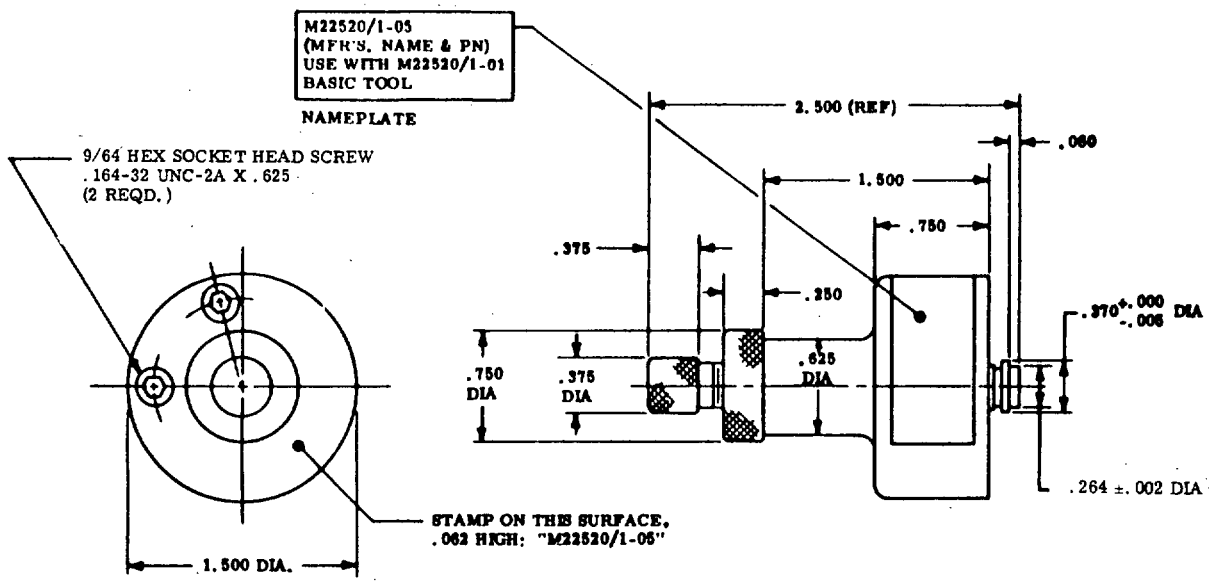

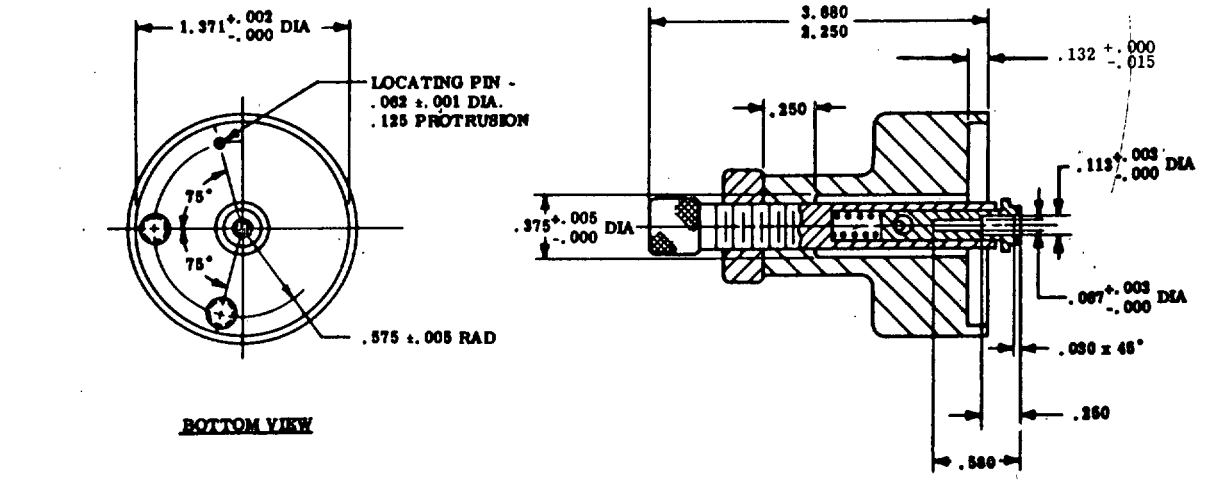


UNIVERSAL HEAD

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF.)	SUPERSEDES	
			INTERCHANGEABLE WITH	NOT INTERCHANGEABLE WITH
M22520/1-05	BLUE	OTHER THAN MILITARY STANDARD CONTACTS	MS27828-2	MS3191-6T

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
2. THE WEIGHT OF THE UNIVERSAL HEAD SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

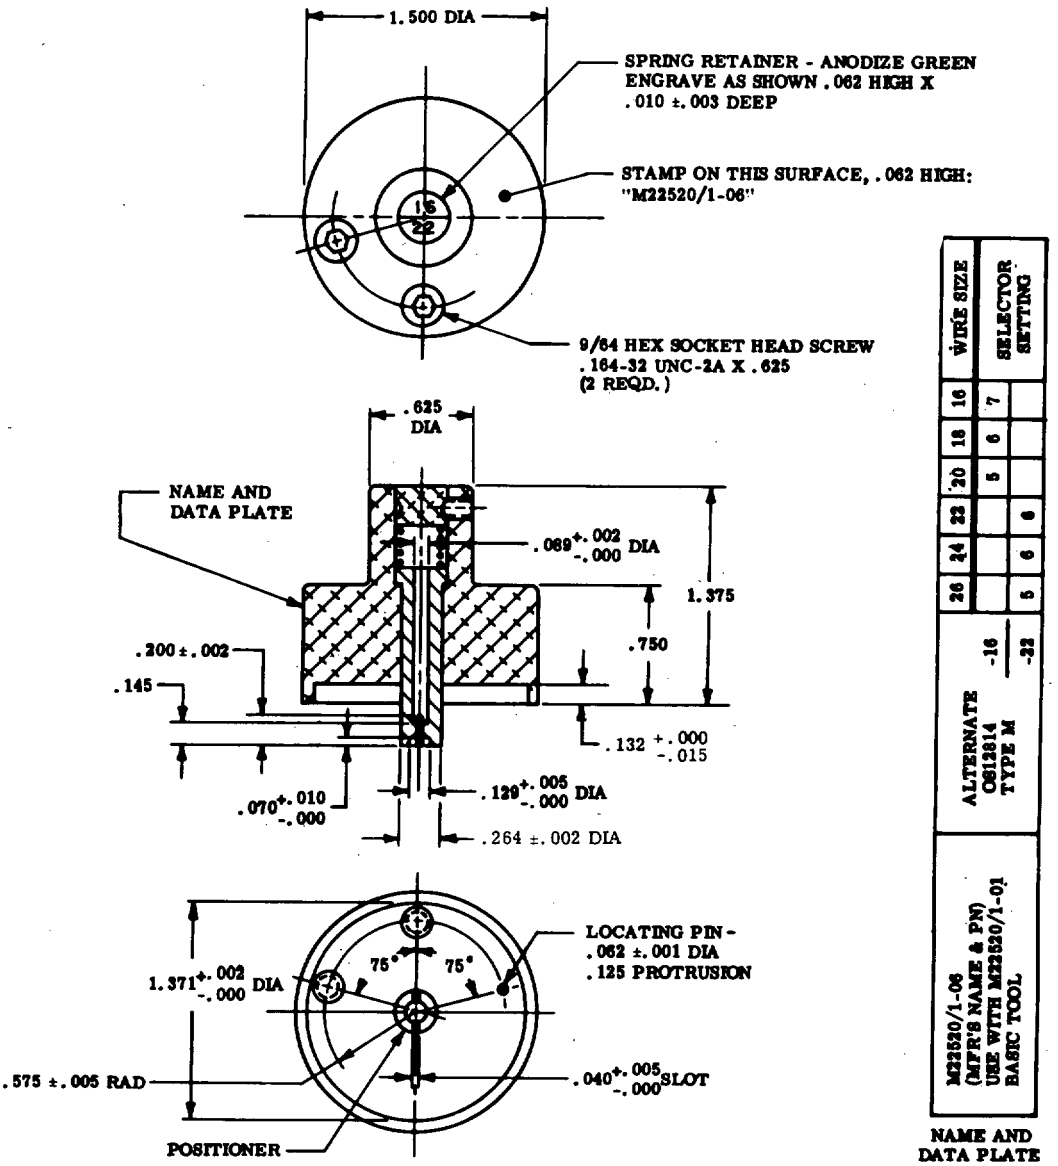


HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF.)	SUPERSEDES - NOT INTERCHANGEABLE WITH
M22520/1-06	BLUE	ALTERNATE OS12814 TYPE M	MS3191-8T

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

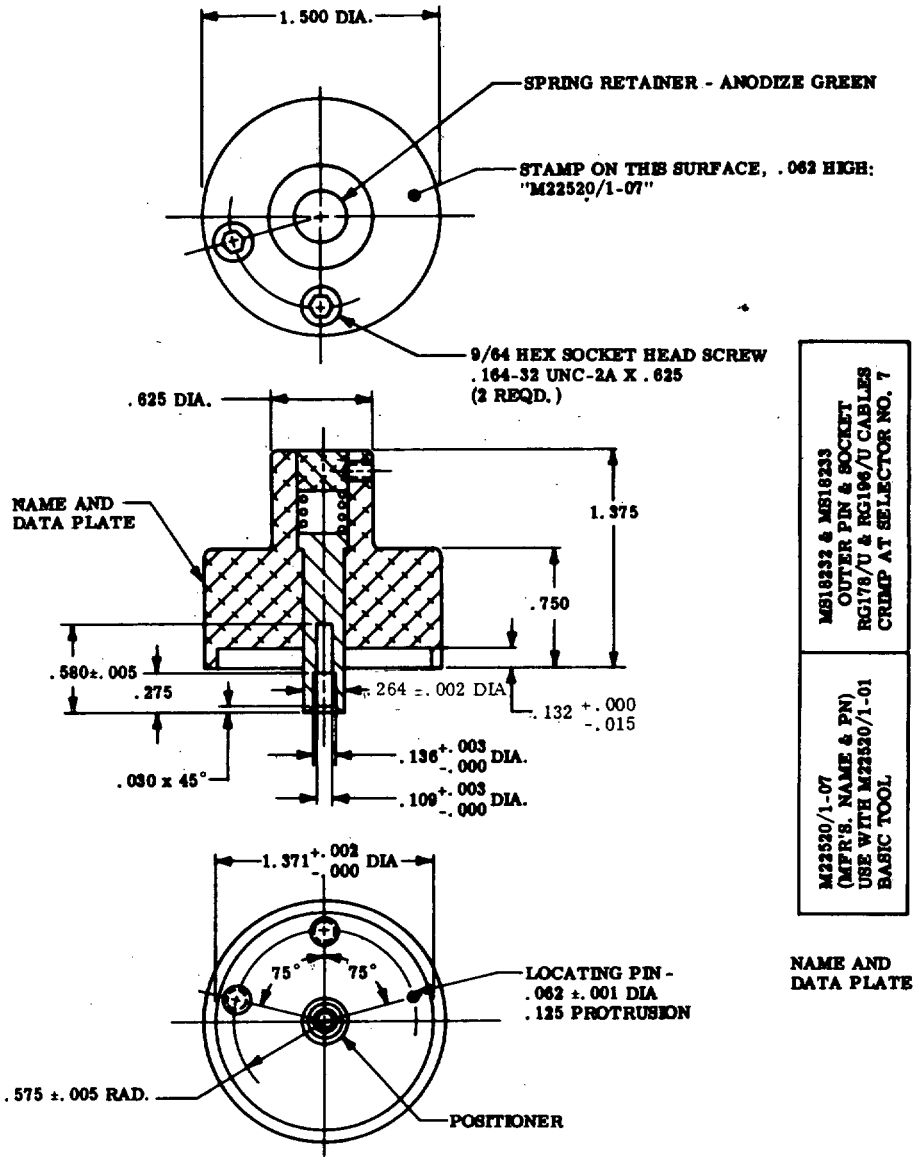


HEAD ASSEMBLY

PART NO	BODY COLOR	CONTACTS ACCOMMODATED (REF.)	SUPERSEDES - NOT INTERCHANGEABLE WITH
M22520/1-07	BLUE	MS18232-1 & MS18233-1	MS3191-7T

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

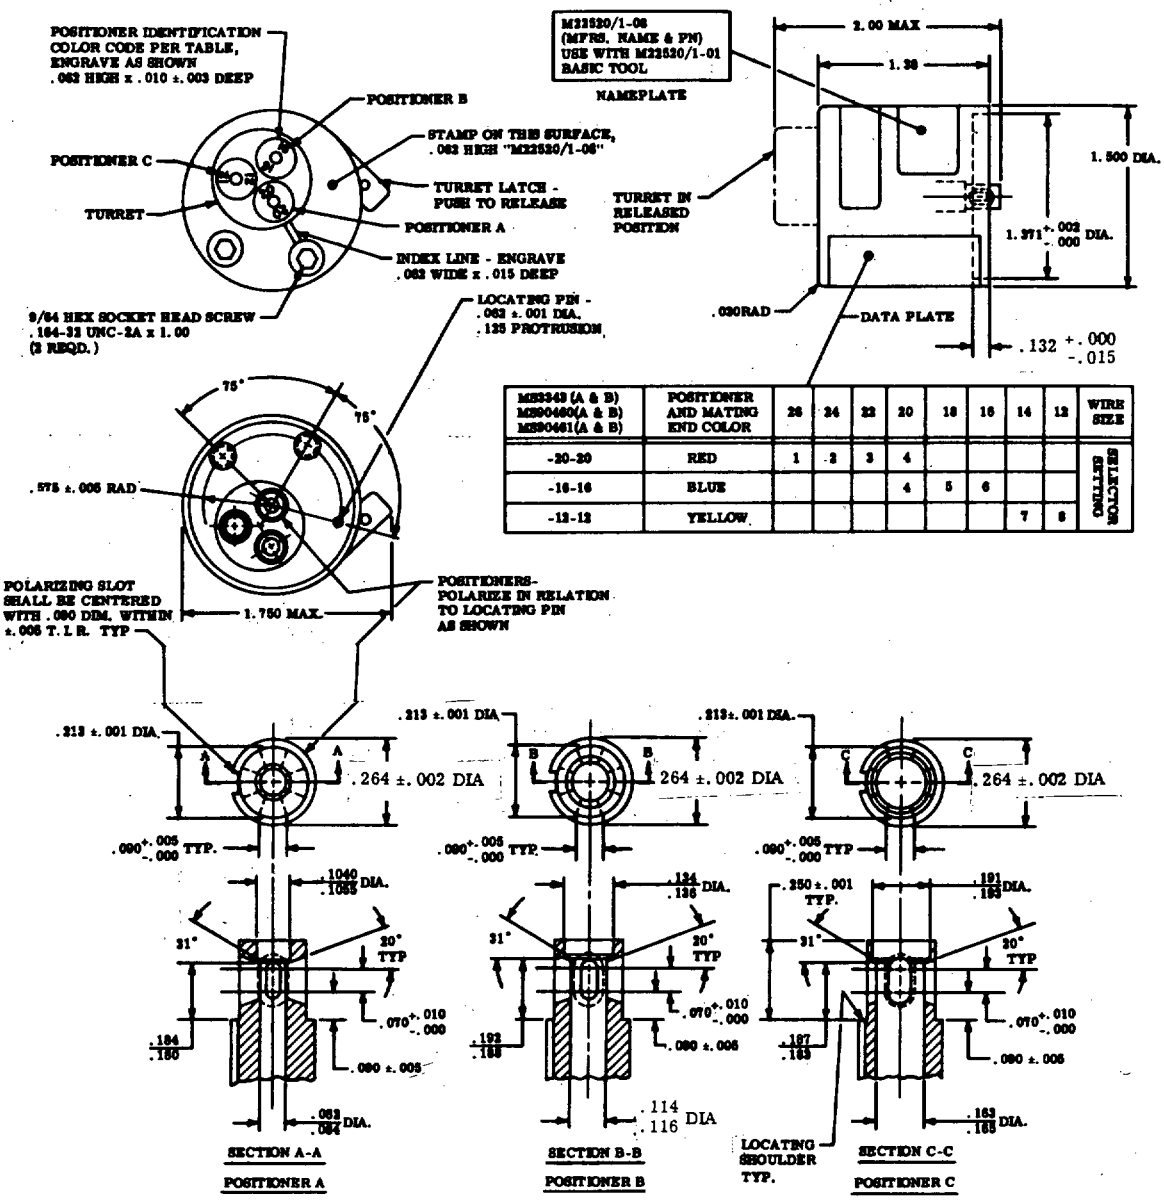

M83343 (A & B) M390460(A & B) M390461(A & B)	POSITIONER AND MATING END COLOR	26	24	22	20	18	16	14	12	WIRE SIZE
-20-20	RED	1	2	3	4					SELECTION
-16-16	BLUE				4	5	6			
-12-12	YELLOW							7	8	


TURRET HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)		
		POSITIONER A- COLOR RED	POSITIONER B- COLOR BLUE	POSITIONER C- COLOR YELLOW
M22520/1-06	BLUE	M83343-20-20 (A & B) M390460-20-20 (A & B) M390461-20-20 (A & B)	M83343-16-16 (A & B) M390460-16-16 (A & B) M390461-16-16 (A & B)	M83343-12-12 (A & B) M390460-12-12 (A & B) M390461-12-12 (A & B)

NOTE:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 23 POUNDS.
3. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

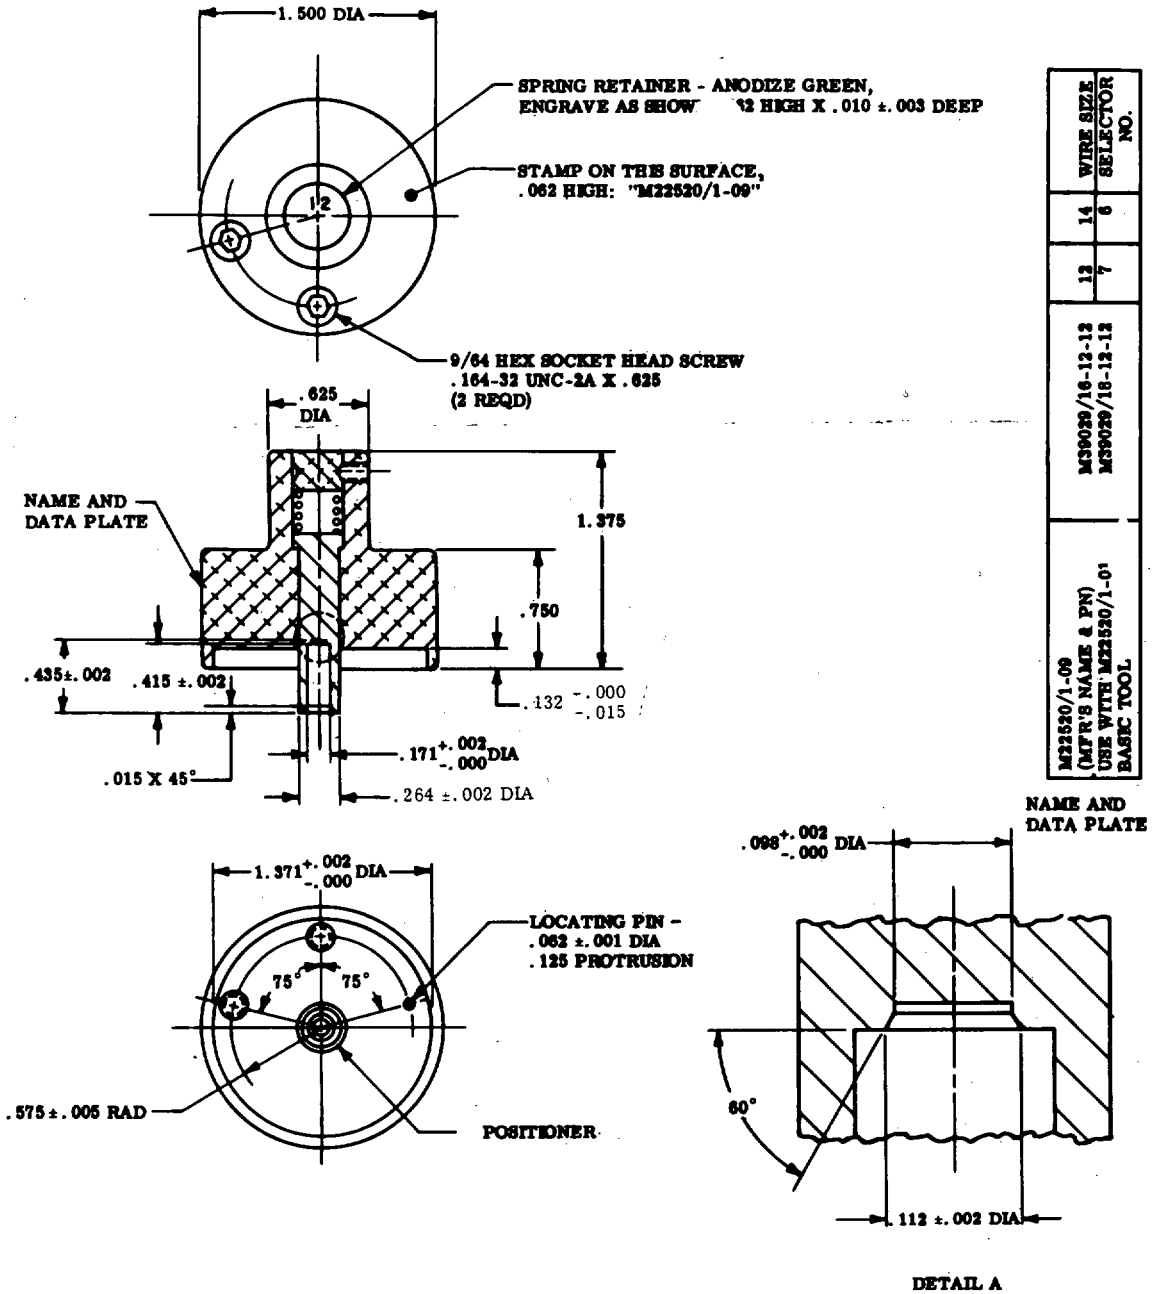

WIRE SIZE	SELECTOR NO.
14	6
12	7
M39029/16-12-12 M39029/18-12-12	
M22520/1-09 (MFR'S NAME & PN) USE WITH M22520/1-01 BASIC TOOL	


HEAD ASSEMBLY

PART NO	BODY COLOR	CONTACTS ACCOMMODATED (REF)
M22520/1-09	BLUE	M39029/16-12-12 & M39029/18-12-12

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

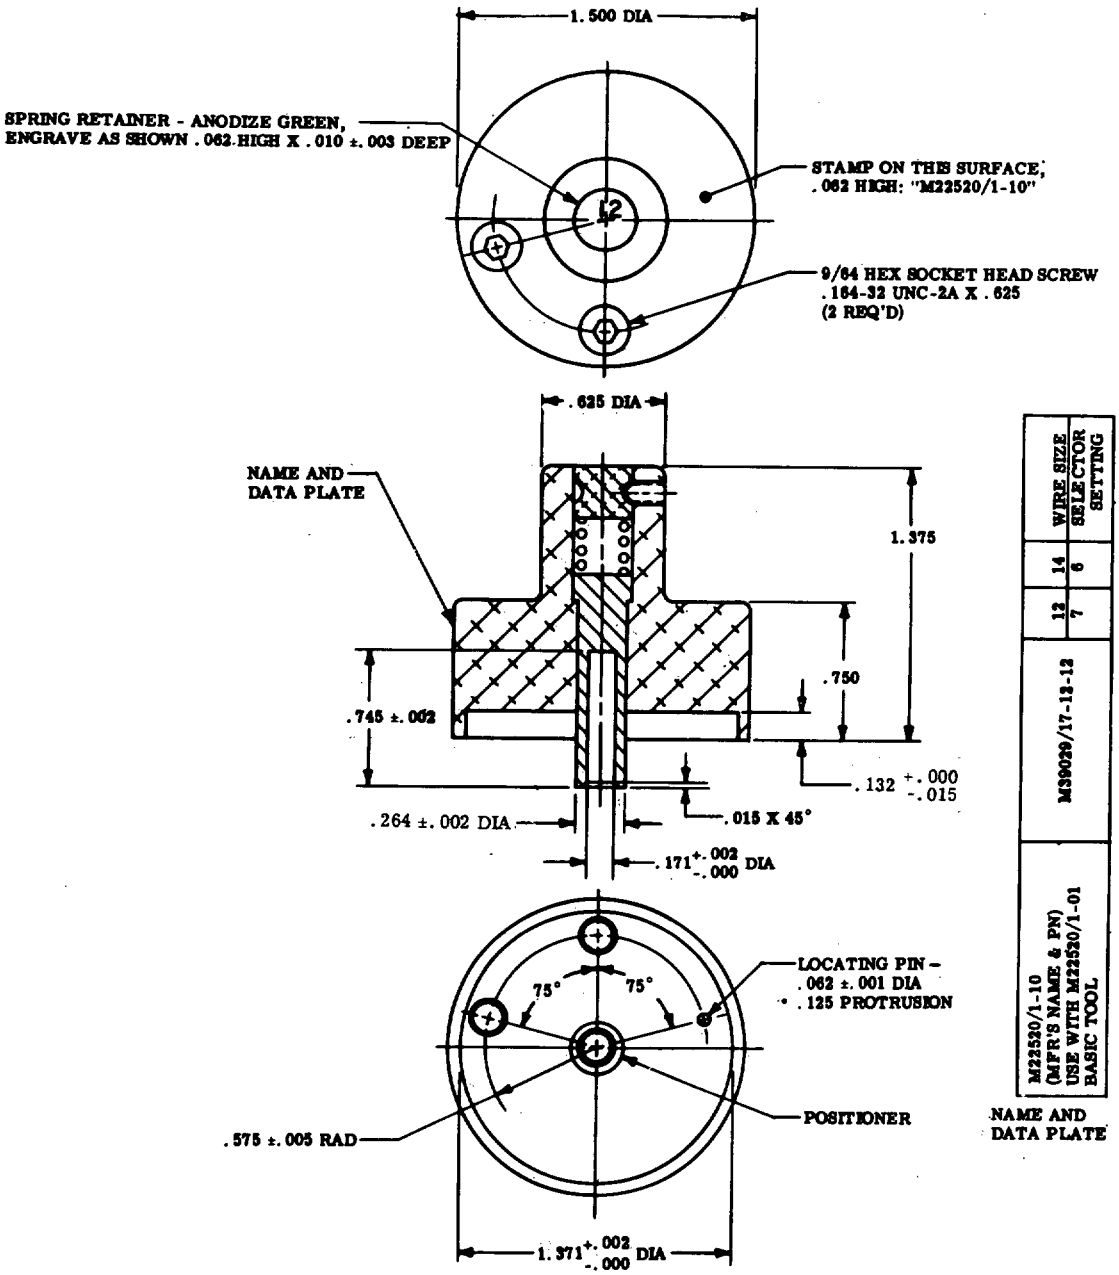


HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACT ACCOMMODATED (REF)
M22520/1-10	BLUE	M39029/17-12-12

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

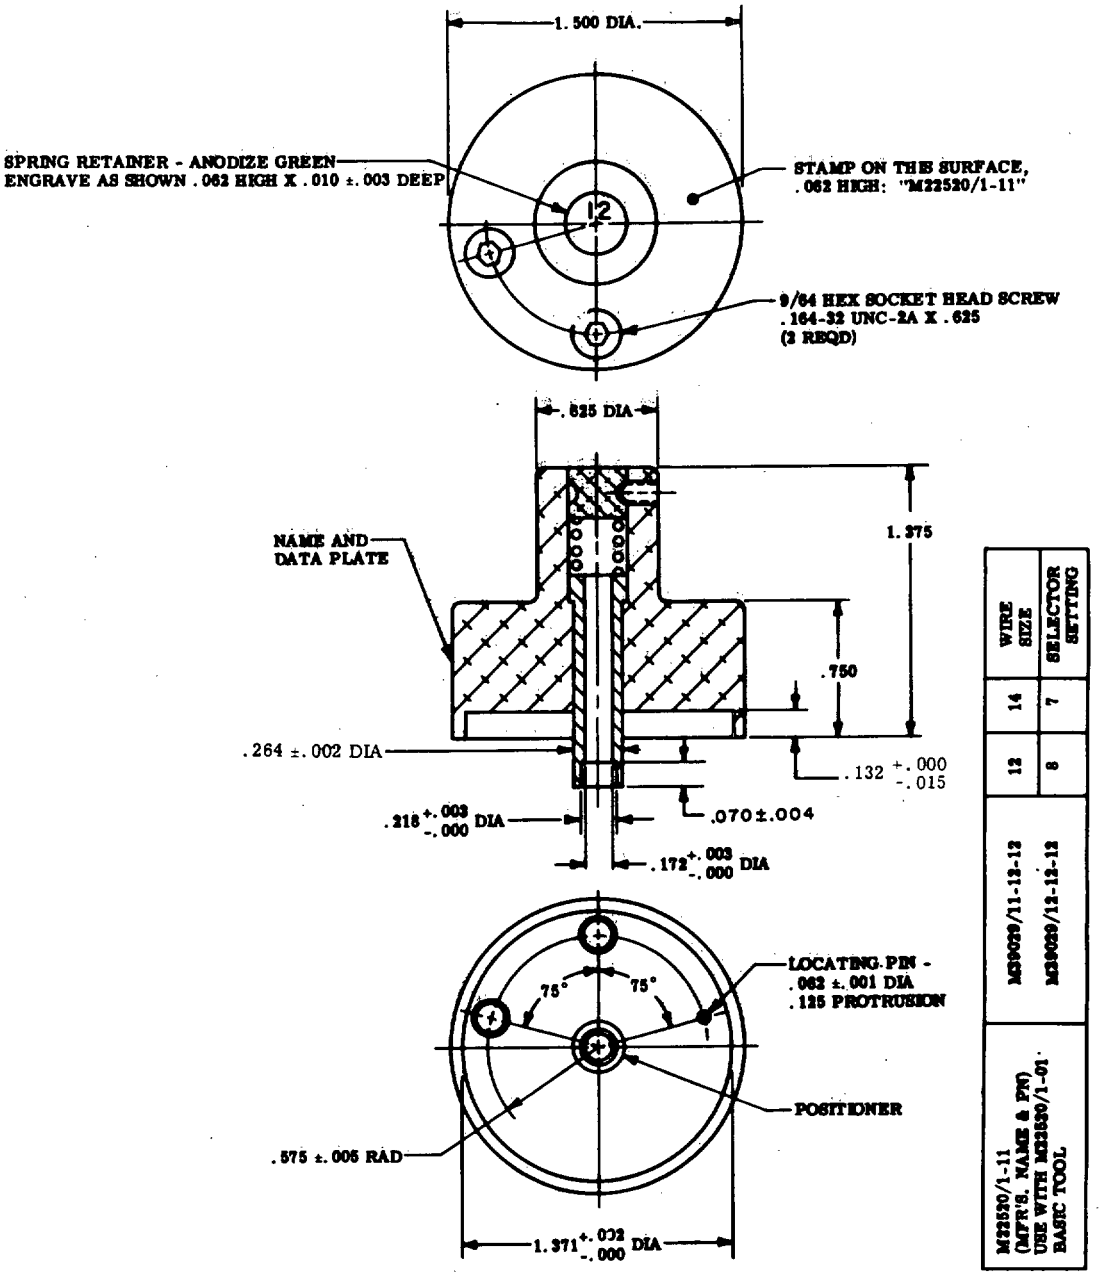

WIRE SIZE	SELECTOR SETTING	
14	7	
12	8	
M39029/11-13-12 M39029/12-12-12		M22520/1-11 (MFR'S. NAME & PN) USE WITH M22520/1-01 BASIC TOOL

NAME AND
DATA PLATE


HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)
M22520/1-11	BLUE	M39029/11-12-12 M39029/12-12-12


NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

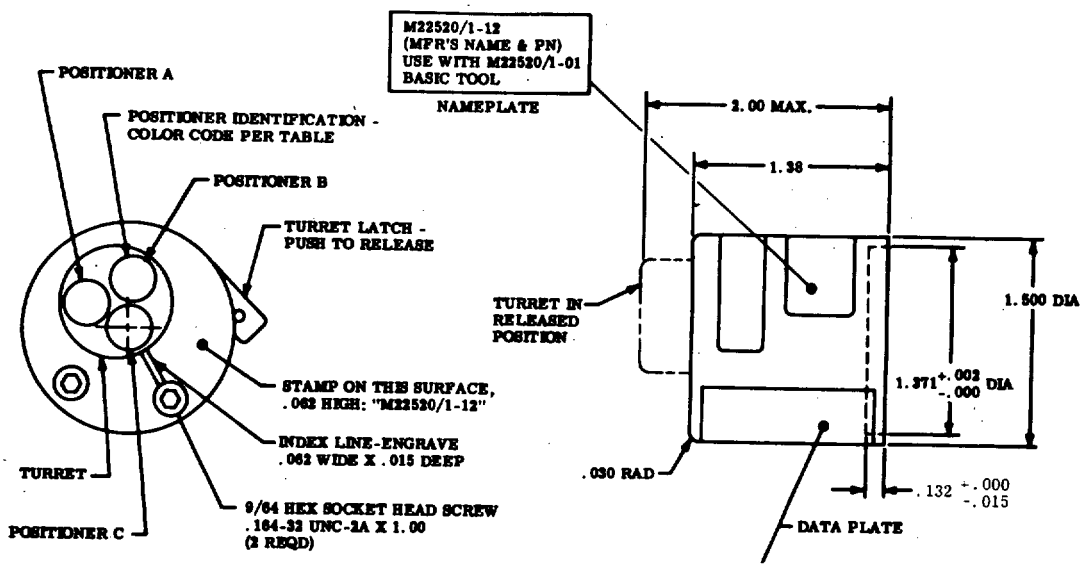

DATA PLATE

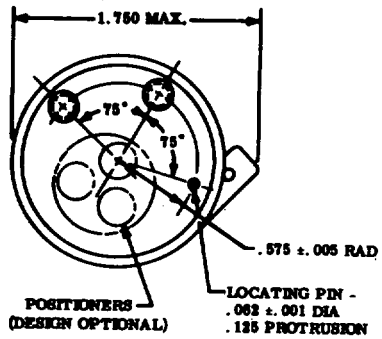

M39012/	POSITIONER COLOR	RG 122/U	RG 142/U	RG 180/U	RG 195/U	RG 400/U	CABLE SIZE
16-0503, 26-0503	BLUE		5			5	SELECTOR SETTING
16-0502, 26-0502				3	3		
16-0501, 26-0501		6					
17-0503, 27-0503			5			5	
17-0502, 27-0502				3	3		
17-0501, 27-0501		6					
18-0503, 29-0503			5			5	
18-0502, 29-0502				3	3		
18-0501, 29-0501		6					
20-0503, 30-0503	GREEN		5			5	
20-0502, 30-0502				3	3		
20-0501, 30-0501		6					
19-0503, 28-0503	RED		5			5	
19-0502, 28-0502				3	3		
19-0501, 28-0501		6					


TURRET HEAD ASSEMBLY


PART NUMBER	BODY COLOR	CONTACTS ACCOMMODATED (REF)		
		POSITIONER -A- COLOR BLUE	POSITIONER -B- COLOR GREEN	POSITIONER -C- COLOR RED
M22520/1-12	BLUE	M39012/16-0503, 26-0503 M39012/16-0502, 26-0502 M39012/16-0501, 26-0501 M39012/17-0503, 27-0503 M39012/17-0502, 27-0502 M39012/17-0501, 27-0501 M39012/18-0503, 29-0503 M39012/18-0502, 29-0502 M39012/18-0501, 29-0501	M39012/20-0501, 30-0501 M39012/20-0502, 30-0502 M39012/20-0503, 30-0503	M39012/19-0503, 28-0503 M39012/19-0502, 28-0502 M39012/19-0501, 28-0501

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 22 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

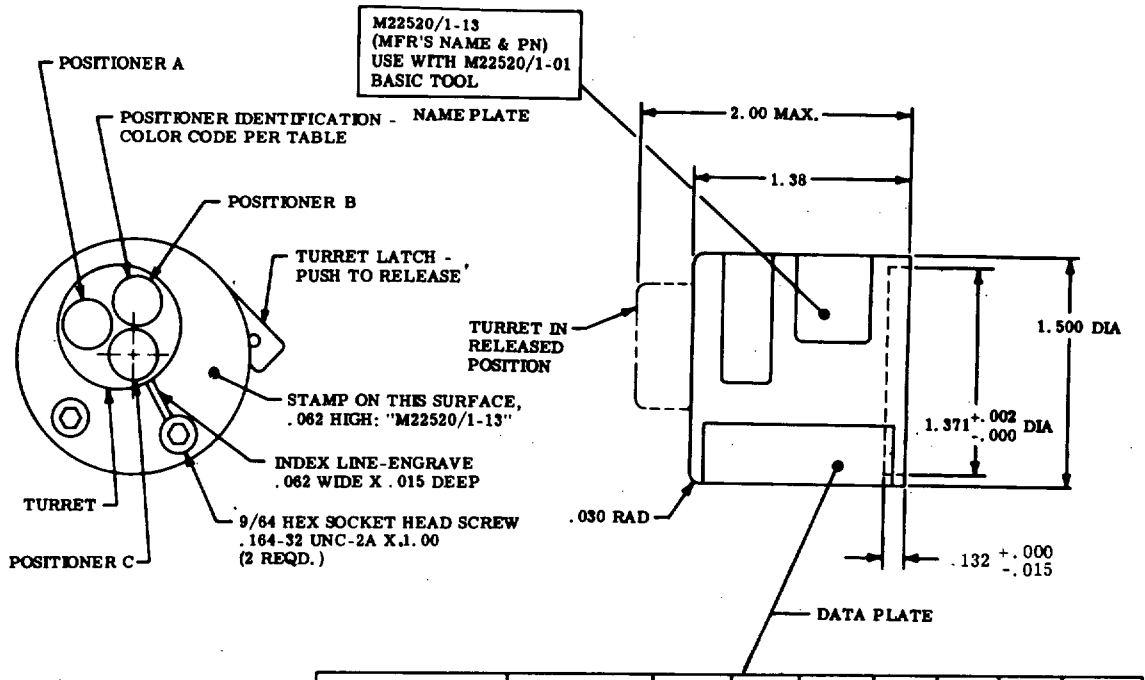

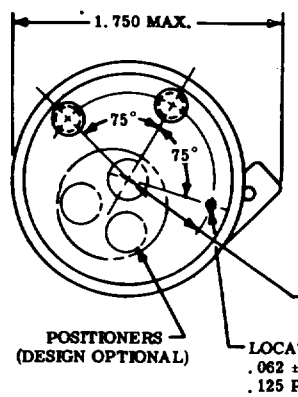

M39012/	POSITIONER COLOR	RG 142B/U	RG 213/U	RG 214/U	RG 225/U	RG 393/U	RG 400/U	CABLE SIZE
01-0501, 01-0502	GREEN		8	8	8	8		SELECTOR SETTING
01-0503		7					7	
05-0501, 05-0502	BLUE		8	8	8	8		
39-0501				8	8	8		
05-0503, 39-0503		7					7	
02-0501, 02-0502 02-0511, 02-0512	RED		8	8	8	8		
02-0503, 02-0513		7					7	


TURRET HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)		
		POSITIONER A- COLOR GREEN	POSITIONER B- COLOR BLUE	POSITIONER C- COLOR RED
M22520/1-13	BLUE	M39012/01-0501 M39012/01-0502 M39012/01-0503	M39012/05-0501 M39012/39-0501 M39012/05-0502 M39012/39-0503 M39012/05-0503	M39012/02-0501 M39012/02-0511 M39012/02-0502 M39012/02-0512 M39012/02-0503 M39012/02-0513

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 22 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

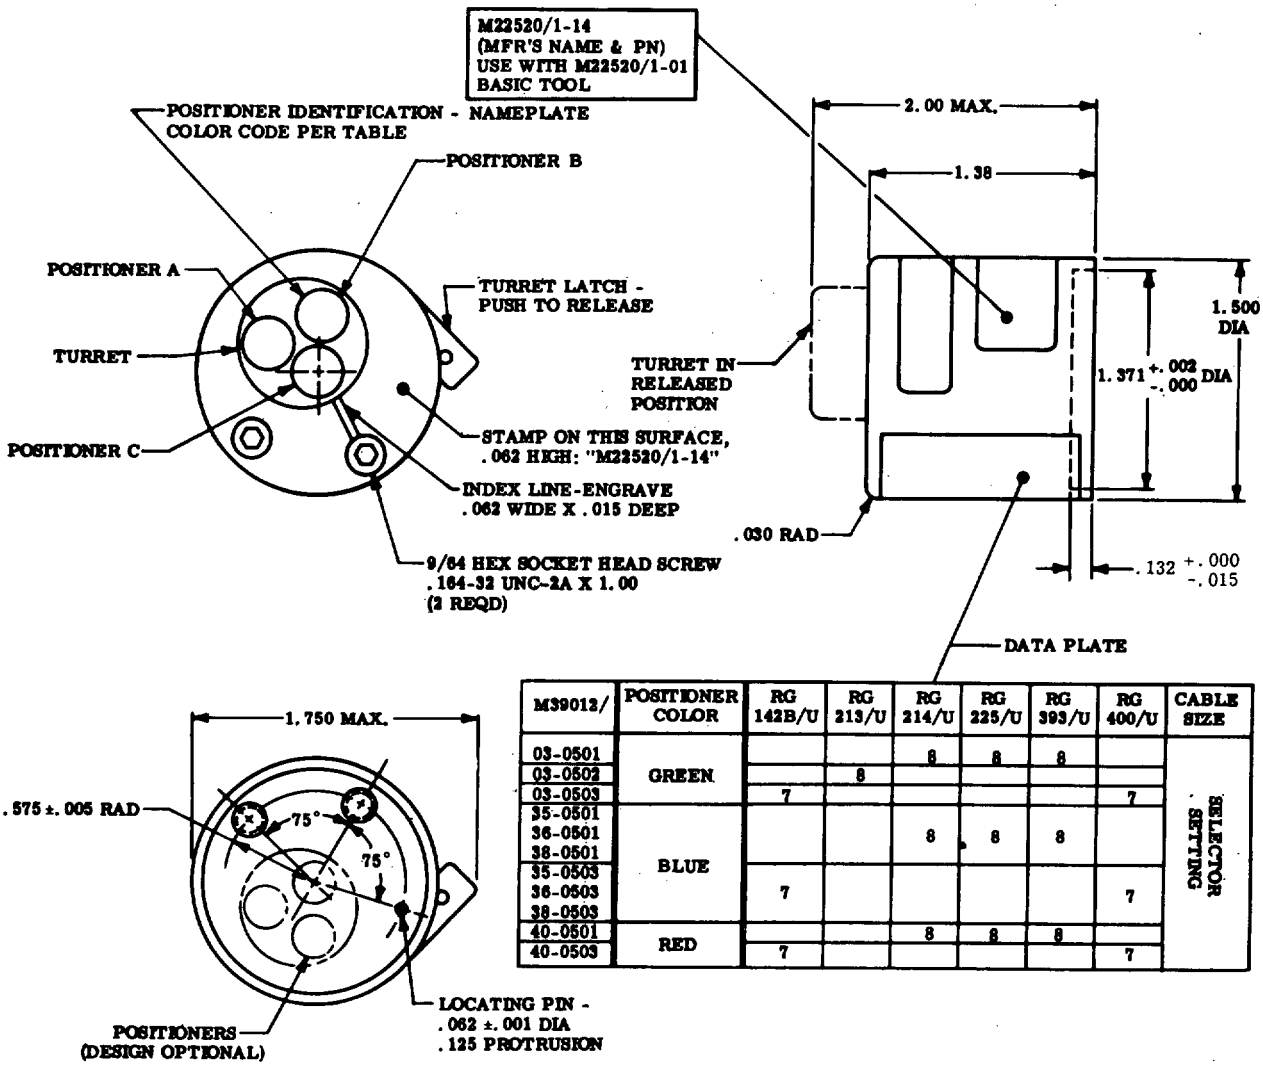

M39012/	POSITIONER COLOR	RG 142B/U	RG 213/U	RG 214/U	RG 225/U	RG 393/U	RG 400/U	CABLE SIZE
03-0501	GREEN			8	8	8		SELECTOR SETTING
03-0502			8					
03-0503		7					7	
35-0501 36-0501 38-0501	BLUE			8	8	8		
35-0503 36-0503 38-0503		7					7	
40-0501	RED			8	8	8		
40-0503		7					7	


TURRET HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)		
		POSITIONER A COLOR GREEN	POSITIONER B COLOR BLUE	POSITIONER C COLOR RED
M22520/1-14	BLUE	M39012/03-0501 M39012/03-0502 M39012/03-0503	M39012/35-0501 M39012/35-0503 M39012/36-0501 M39012/36-0503 M39012/38-0501 M39012/38-0503	M39012/40-0501 M39012/40-0503

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. THE TURRET SHALL BE DESIGNED SO THAT POSITIONERS MUST BE CORRECTLY INDEXED BEFORE TURRET CAN BE LATCHED.
2. THE FORCE REQUIRED TO PUSH THE TURRET TO THE LATCHED POSITION SHALL NOT EXCEED 22 POUNDS.
3. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
4. THE WEIGHT OF THE TURRET HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

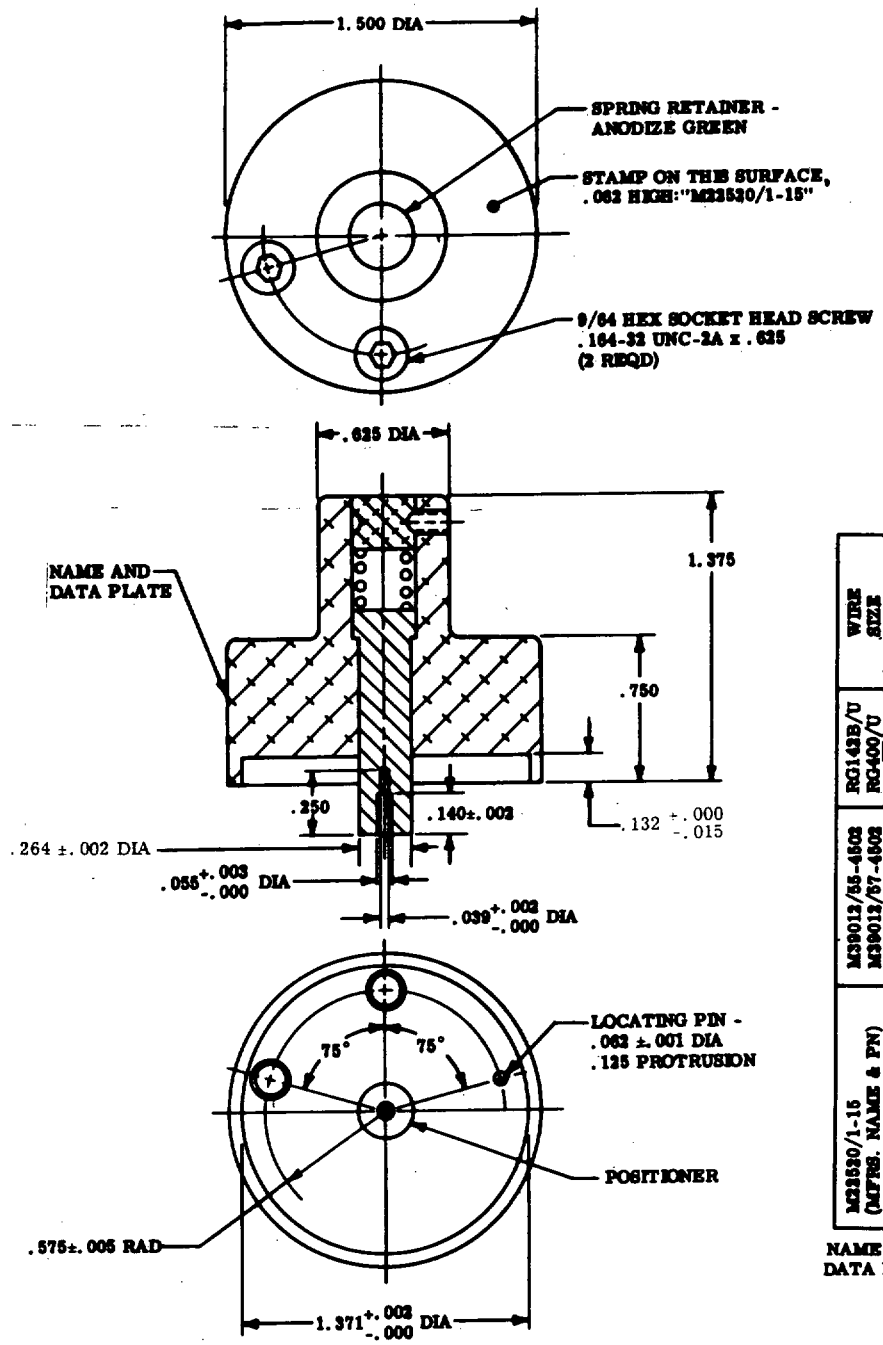

SELECTOR SETTING	WIRE SIZE
3	RG142B/U RG400/U
M39012/55-4502 M39012/57-4502 M39012/58-4502 M39012/59-4502	
M22520/1-15 (MFRS. NAME & PN) USE WITH M22520/1-01 BASIC TOOL	

NAME AND DATA PLATE


HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)
M22520/1-15	BLUE	M39012/55-4502 M39012/57-4502 M39012/58-4502 M39012/59-4502

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ±.010. ANGLES ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

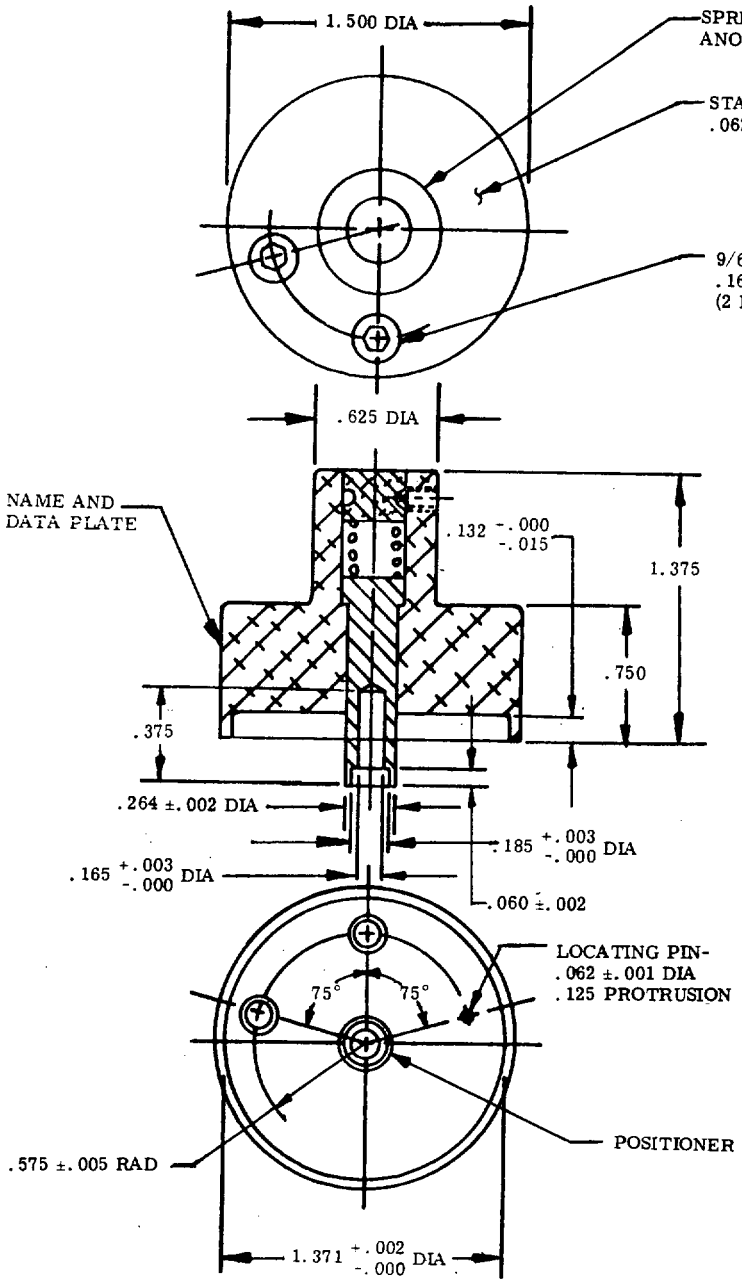

WIRE SIZE	SELECTOR SETTING
12	8
14	7

MS27492-12

M22520/1-16
(MFRS. NAME & P/N)
USE WITH M22520/1-01
BASIC TOOL

NAME AND
DATA PLATE

HEAD ASSEMBLY

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF)
M22520/1-16	BLUE	MS27492-12

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUNDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - AS
USAF - 84

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
USAF - 12, 17, 80, 82
DESC - ES

User activities:
Army - ME, AT, GL
Navy - MC
Air Force - 70

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project No. 5120-0824)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE: 1973—714-866/3983 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.