MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR WIRE BARREL SIZES 12 THROUGH 20

This amendment forms a part of Military Specification Sheet MIL-C-22520/1C, dated 19 March 1976, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Basic tool configuration, maximum handle opening dimension: Delete "5.875" and substitute "6.250".

PAGE 18

At top of page, add new outline configuration for part number M22520/1-17 as printed on page 2 of this amendment.

Add detail "A" to clarify the dimensional size and location of the indenter slots.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AV
Navy - SH, EC, OS
Air Force - 11, 12, 17, 99
DLA - ES

User activities:
Army - ME, AT, GL
Navy - MC


Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0993)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.

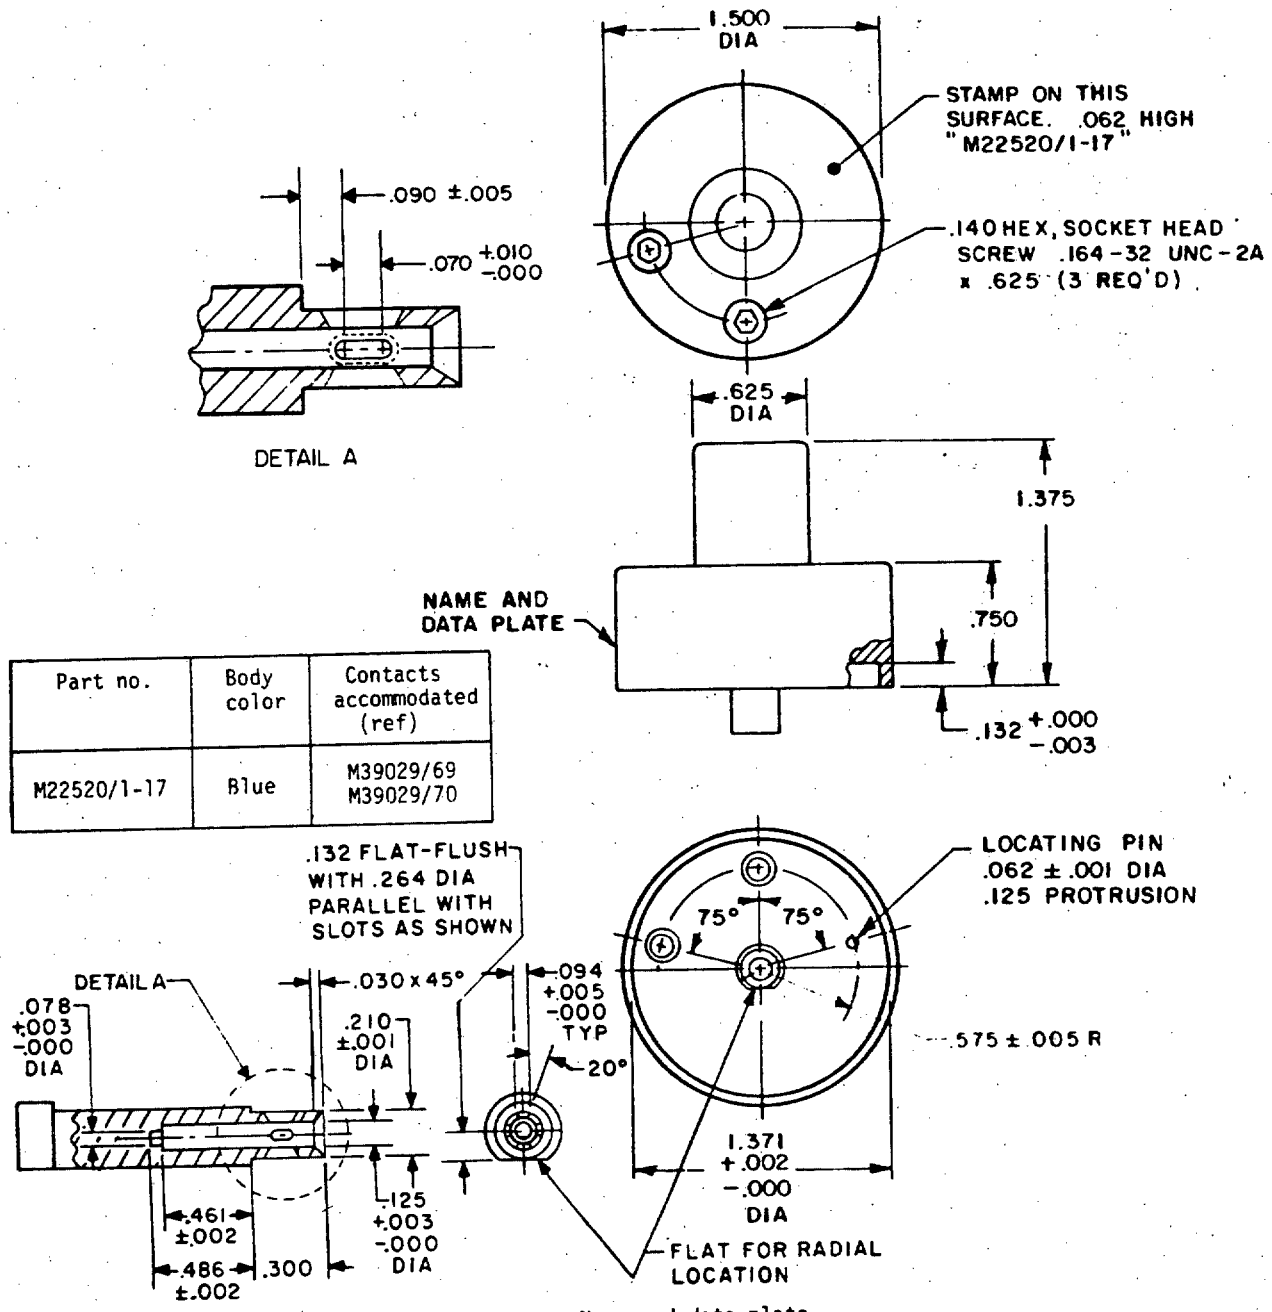

Name and data plate

Part no.	Body color	Contacts accommodated (ref)
M22520/1-17	Blue	M39029/69 M39029/70

Contacts		Wire range	28	26	24	22	20	18	16	Wire size
M39029/69-1	M39029/70-1	24 - 28	1	2	3					Sel. no.
M39029/69-2	M39029/70-2	20 - 24			3	4	5			
M39029/69-3	M39029/70-3	16 - 20					5	6	7	

NOTE: Unless otherwise specified, dimensions in inches. Tolerances: Decimals ±.010, angles ±1/2°.

REQUIREMENTS:
1. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
2. THE WEIGHT OF THE HEAD ASSEMBLY SHALL NOT EXCEED .50 POUND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:44Z
Check the source to verify that this is the current version before use.