
MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR SIZE 12 SHIELDED CONTACTS (SHIELD CRIMP SLEEVE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

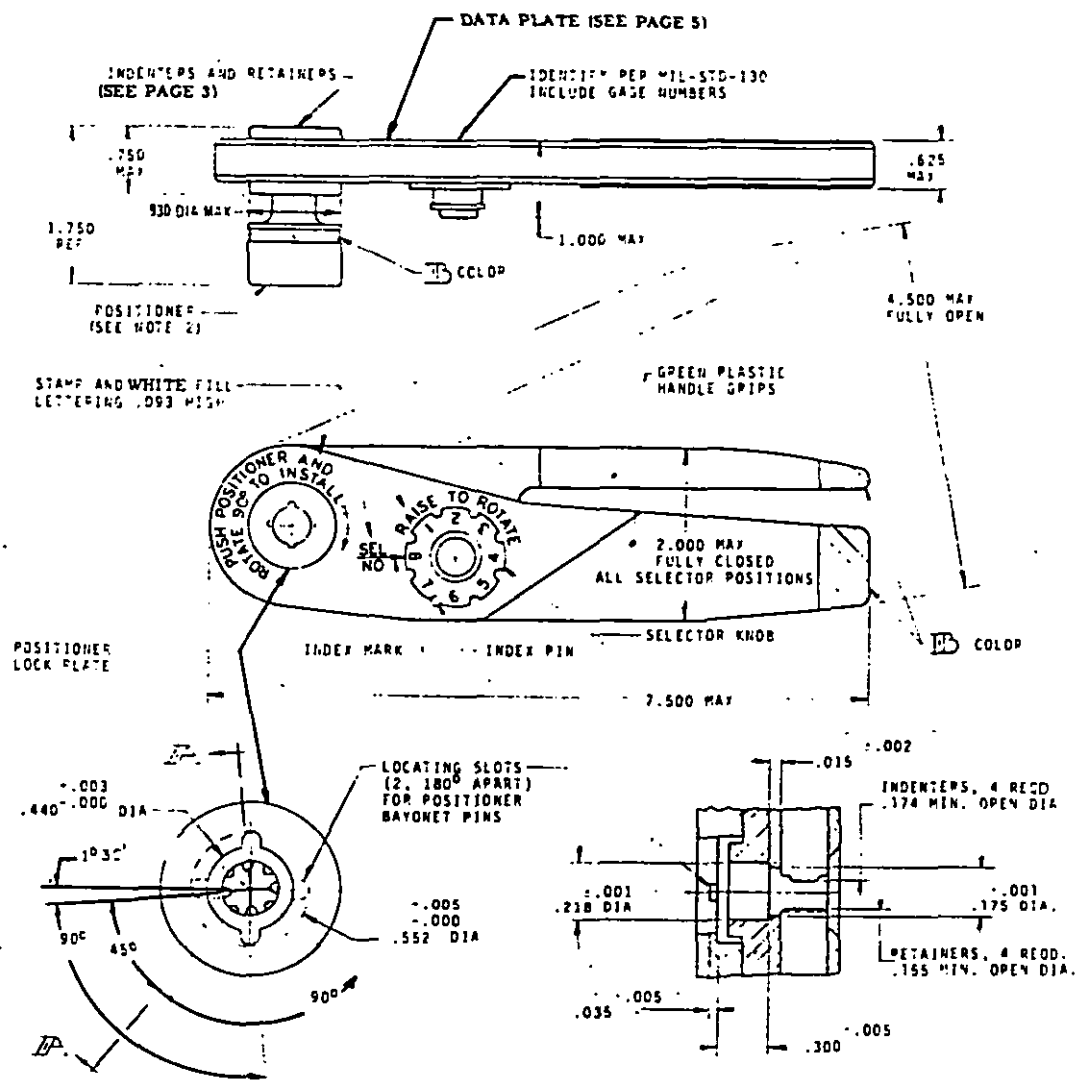

BASIC TOOL

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

PART NUMBER	BODY COLOR	COLOR	FOR INSPECTION GAGING USE	
			INDENTER	RETAINER
M22520/22-01	BLUE	BLACK	M22520/3-4	M22520/3-8

NOTES


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
2. FOR APPLICABLE POSITIONERS SEE PAGE 4
3. RETAINERS MUST BE FULLY CLOSED BEFORE INDENTERS START THE CRIMP.


REQUIREMENTS:

1. THE FORCE REQUIRED TO MAKE SATISFACTORY CRIMPS SHALL NOT EXCEED 65 POUNDS.
2. OUTLINE CONFIGURATION OPTIONAL WITHIN MAXIMUM DIMENSIONS SHOWN.
3. THE POSITIONER LOCK PLATE SHALL PROVIDE POSITIVE DETENT FOR BAYONET LOCK PINS.
4. THE WEIGHT OF THE BASIC TOOL SHALL NOT EXCEED 1.0 LB.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

INDENTERS

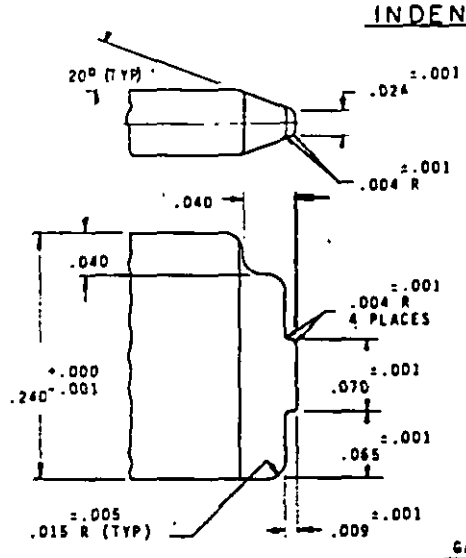

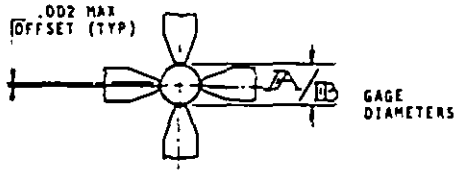

INDENTER LOCATIONS WITH TOOL IN FULLY CLOSED POSITION (RETAINERS OMITTED FOR CLARITY)




OPPOSITE AND ADJACENT INDENTER CLOSURE


BREAK ALL SHARP EDGES AROUND INDENTER TIP .002-.004

GAGING LIMITS OF INDENTERS


SELECTOR NUMBER	INSPECTION GAGE	
	Ⓐ ±.0001 GO DIA	Ⓑ ±.0001 NO GO DIA
1	.064	.067
2	.067	.070
3	.070	.073
4	.073	.076
5	.077	.080
6	.081	.084
7	.085	.088
8	.090	.093

RETAINERS

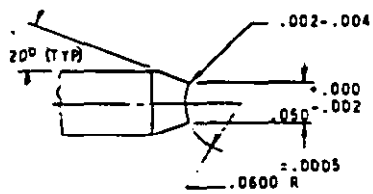

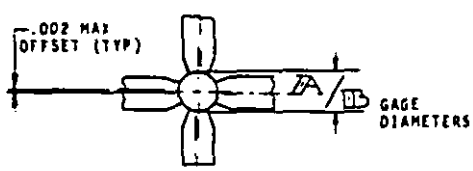


RETAINER LOCATIONS WITH TOOL IN FULLY CLOSED POSITION (INDENTERS OMITTED FOR CLARITY)

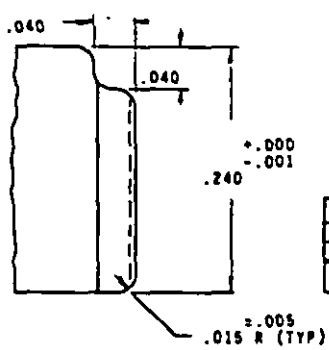

GAGING LIMITS OF RETAINERS

INSPECTION GAGE	
Ⓐ ±.0001	Ⓑ ±.0001
.121	.124




OPPOSITE AND ADJACENT RETAINER CENTERLINE

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. MATERIAL: OIL HARDENED TOOL STEEL, HARDEN TO ROCKWELL "C" 56-58.
2. SURFACE TEXTURE SHALL BE AS SHOWN IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

POSITIONER

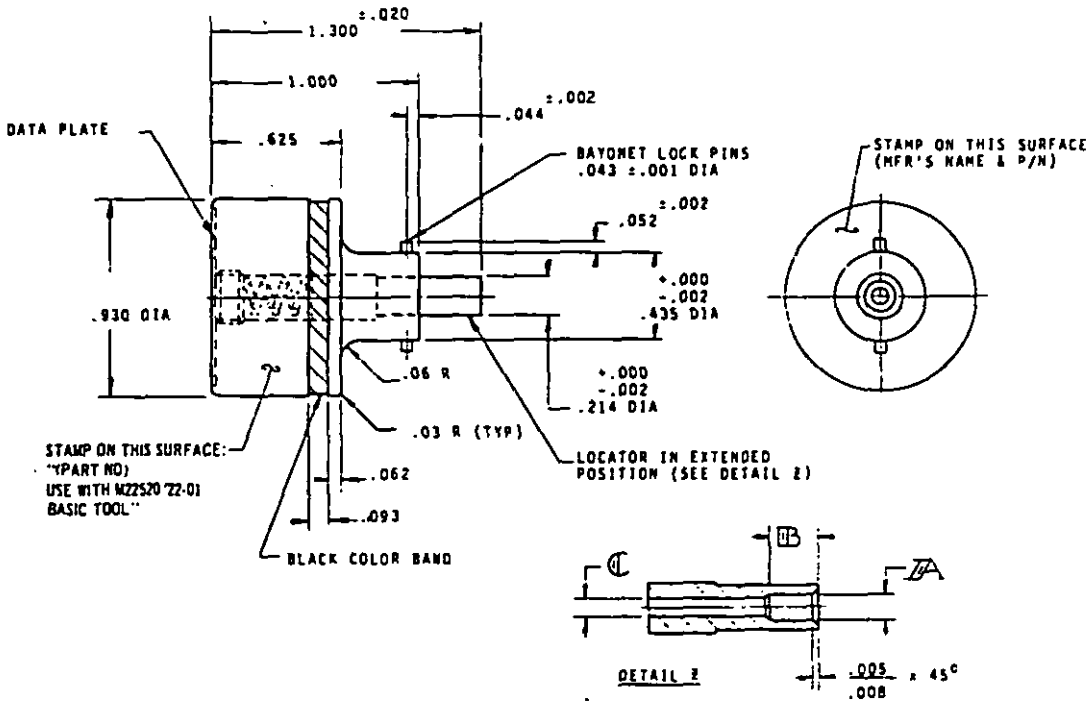


PART NUMBER	BODY COLOR	A DIA +.002 -.000	B DIM ±.002	C DIA +.002 -.000	CONTACTS ACCOMMODATED (REF)
M22520/22-02	GREEN	.129	.160	.093	M39029/19-02 M39029/19-03 M39029/21-02 M39029/21-03 SHIELD CRIMP SLEEVE
M22520/22-03		.129	.490	.093	M39029/20-02 M39029/20-03 SHIELD CRIMP SLEEVE

DATA PLATE

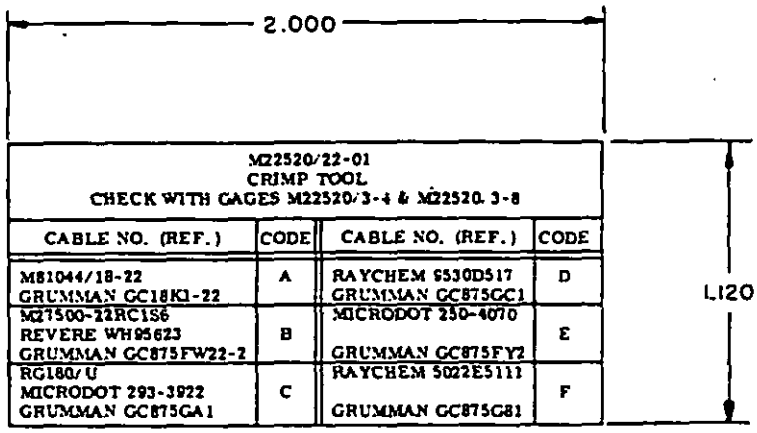


CABLE NO. (REF.)	CODE	CABLE NO. (REF.)	CODE
M81044/18-22 GRUMMAN GC18K1-22	A	RAYCHEM 9530D517 GRUMMAN GC875GC1	D
M27500-22RC1S6 REVERE WH95623 GRUMMAN GC875FW22-2	B	MICRODOT 250-4070 GRUMMAN GC875FY2	E
RG180/U MICRODOT 293-3922 GRUMMAN GC875GA1	C	RAYCHEM 5022E5111 GRUMMAN GC875G81	F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

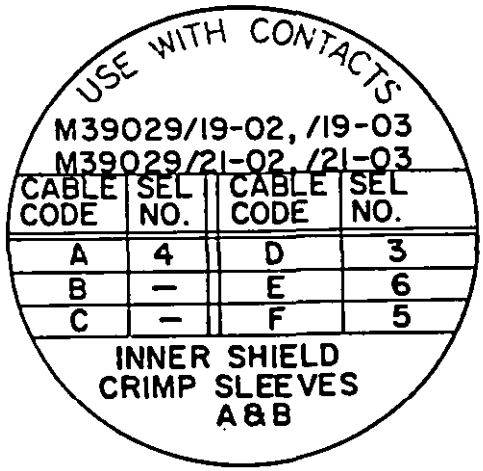

FOR M22520/22-02
POSITIONER

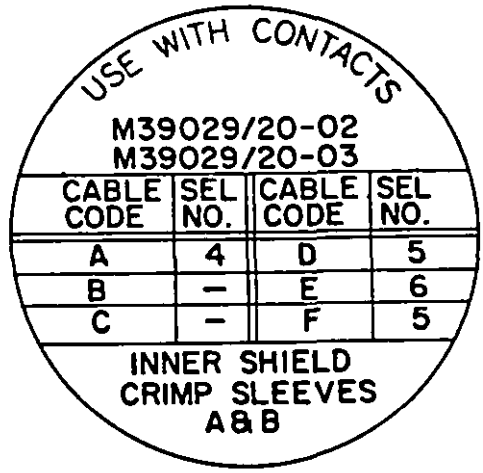

FOR M22520/22-03
POSITIONER

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED SPEC NO QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEEL PER FED SPEC NO QQ-S-763, CLASS 304, CONDITION A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUND.
4. BREAK ALL SHARP EDGES .005 R MAX.
5. SURFACE TEXTURE SHALL BE 63, ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Custodians:
Army - EL
Navy - AS
USAF - 84

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
USAF - 12, 17, 80, 82
DESC - ES

User activities:
Army - ME, AT, GL
Navy - MC
Air Force - 70

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project No. 5120-0807)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1426
1 JAN 72

PREVIOUS EDITION OF 1 JAN 68 MAY BE USED.

S/N 0102-014-1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Defense Electronics Supply Center
1507 Wilmington Pike
Dayton, OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.