MIL-C-22520/24A(AS)
9 August 1985


Superseding
MIL-C-22520/24(AS)
6 July 1977

MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND OR POWER ACTUATED, WIRE TERMINATION: TOOL, FOR LUG TERMINAL AND EXTERNAL POWER PLUG SOCKET CONTACTS, SIZE 22-10.

This specification sheet is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tool described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

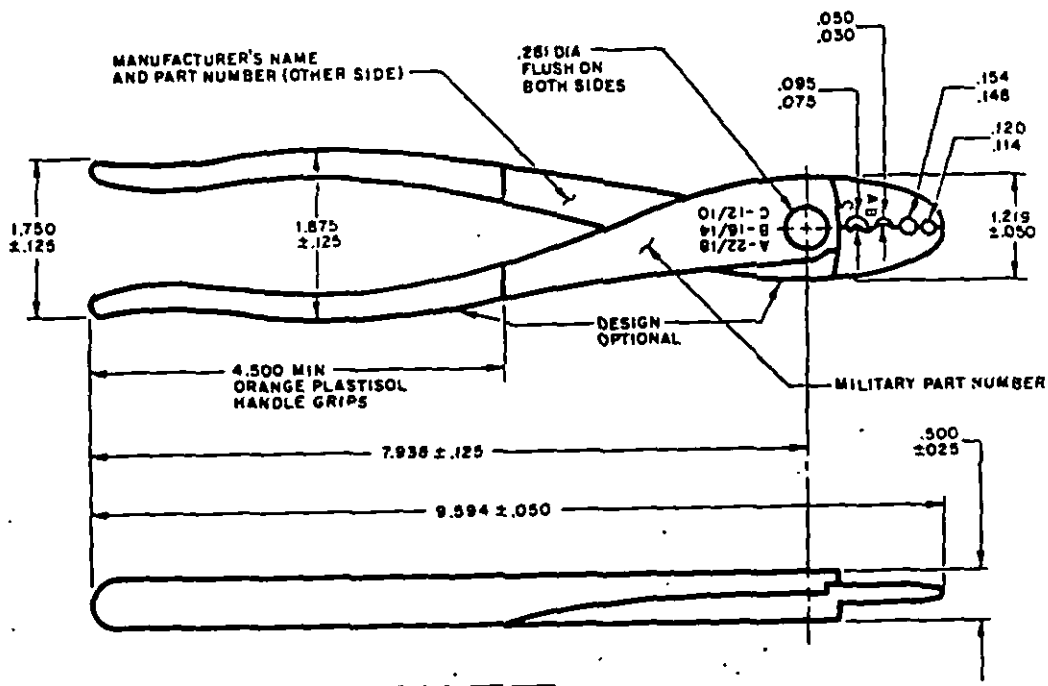


PART NUMBER
M22520/24-01

FIGURE 1. Crimping tool.


FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

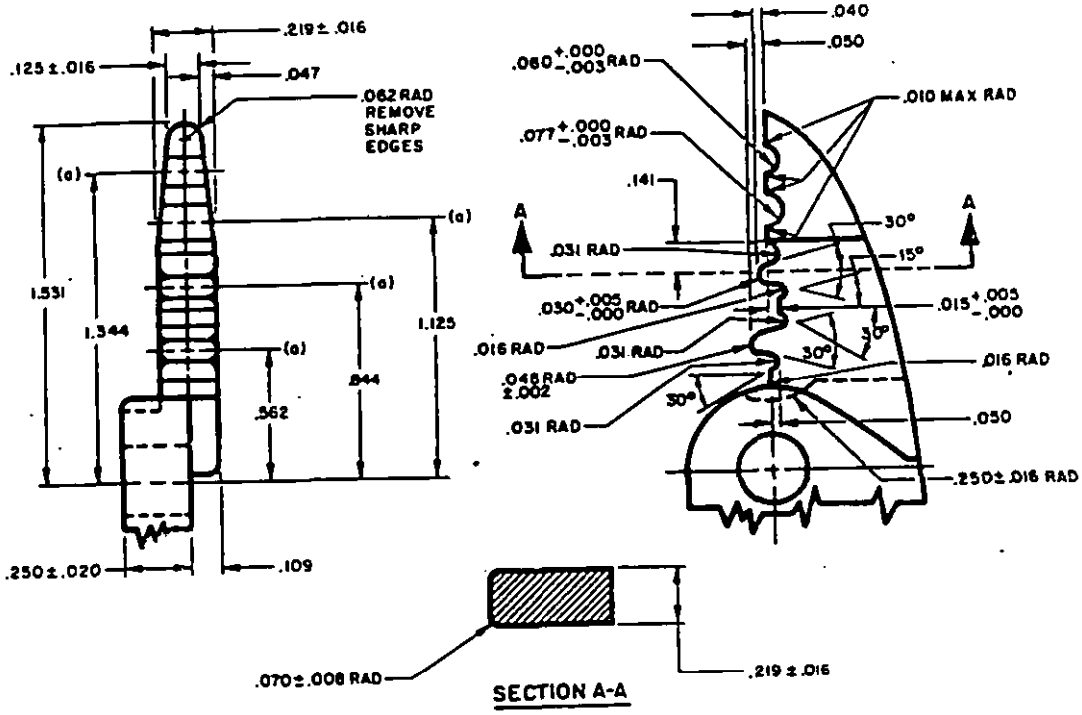

DETAIL 1. INDENTER JAW

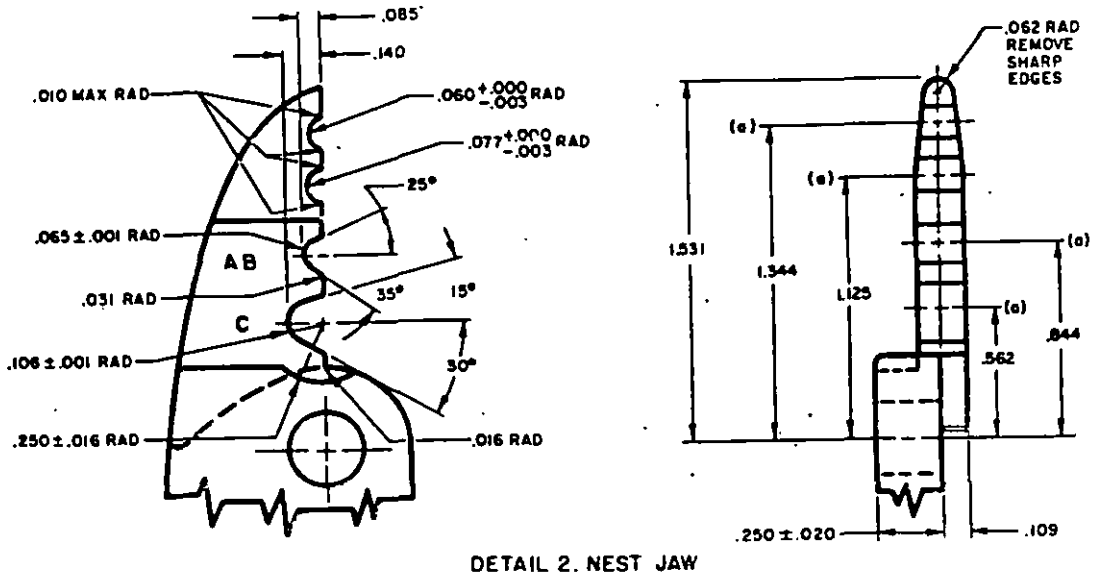

DETAIL 2. NEST JAW

FIGURE 1. Crimping tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm	INCHES	mm
.001	.03	.060	1.52	.154	3.91
.002	.05	.062	1.57	.219	5.56
.003	.08	.065	1.65	.250	6.35
.005	.13	.070	1.78	.281	7.14
.008	.20	.075	1.91	.500	12.70
.010	.25	.077	1.96	.562	14.27
.015	.38	.085	2.16	.844	21.44
.016	.41	.095	2.41	1.125	28.58
.020	.51	.106	2.69	1.219	30.96
.025	.64	.109	2.77	1.344	34.14
.030	.76	.114	2.90	1.531	38.89
.031	.79	.120	3.05	1.750	44.45
.040	1.02	.125	3.18	1.875	47.63
.047	1.19	.140	3.56	4.500	114.30
.048	1.22	.141	3.58	7.938	201.63
.050	1.27	.148	3.76	9.594	243.69

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are +.010 (.25 mm) for decimals and ±.5° for angles.
4. The centerlines (a) must align to within .005 (.13 mm) when tool is assembled.
5. Outline configuration optional within maximum dimensions shown.

FIGURE 1. Crimping tool - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Electric furnace grade 0.80 carbon steel, forged and heat treated, or equivalent.

Handle Finish: Orange plastisol coated in accordance with MIL-P-20689, Type 1, Class 2.

Application: Top two cavities for clamping the insulation grip on MS20659 terminals sizes 22-14. The A, B and C cavities for crimping MS20659 and MS21003 thru MS21015 terminals sizes 22 thru 10 and the C cavity also for crimping MS25486 external power plug socket contact size 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.

Test requirements not applicable are as follows:

Crimping operation type 2 tools.
Locator.
Ratchet.
Handle, indenter and die return operation.
Ratcheting mechanism.

Compression force: Compression force on handles shall not exceed 130 pounds maximum.

Supersession data: In addition to MIL-C-22520/24(AS), the following documents are also superseded by this specification sheet:

MS17776(AS) 14 November 1974
AN3428 16 February 1951

Part number: M22520/24-01.

Custodian:
Navy - AS

Review activities:
Navy - SH, EC, OS
DLA - ES

User activity:
Navy - MC

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-B075)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:47Z
Check the source to verify that this is the current version before use.