
MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND OR POWER ACTUATED, WIRE TERMINATION:
TOOL, FOR CRIMP STYLE ELECTRIC TERMINALS
TYPE I, CLASS 1 TERMINALS UNDER MIL-T-7928 AND MIL-E-16366

This specification sheet is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tool described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

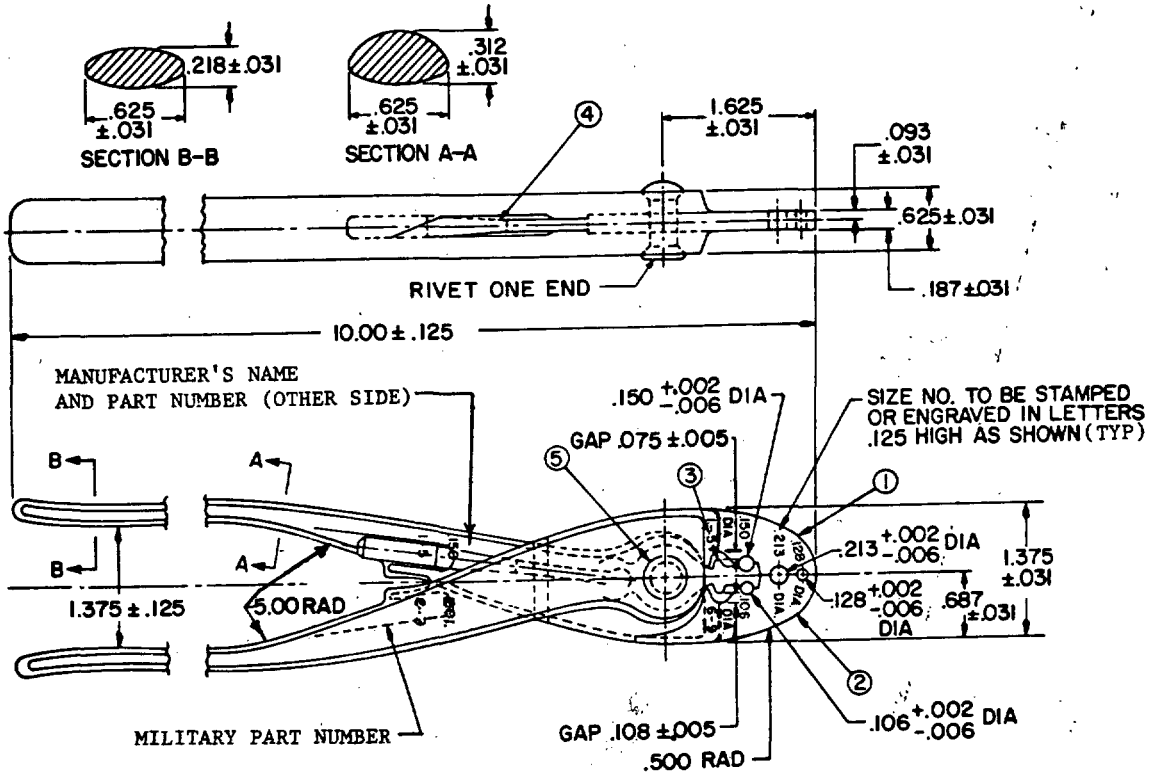

PART NO.
M22520/25-1


INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.108	2.74	.500	12.70
.005	.13	.125	3.18	.625	15.88
.006	.15	.128	3.25	.687	17.45
.010	.25	.150	3.81	1.375	34.93
.031	.79	.187	4.75	1.625	41.28
.040	1.02	.213	5.41	5.00	127.00
.093	2.36	.218	5.54	10.00	254.00
.106	2.69	.312	7.92		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1. Crimping tool (assembly)

FSC 5120


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

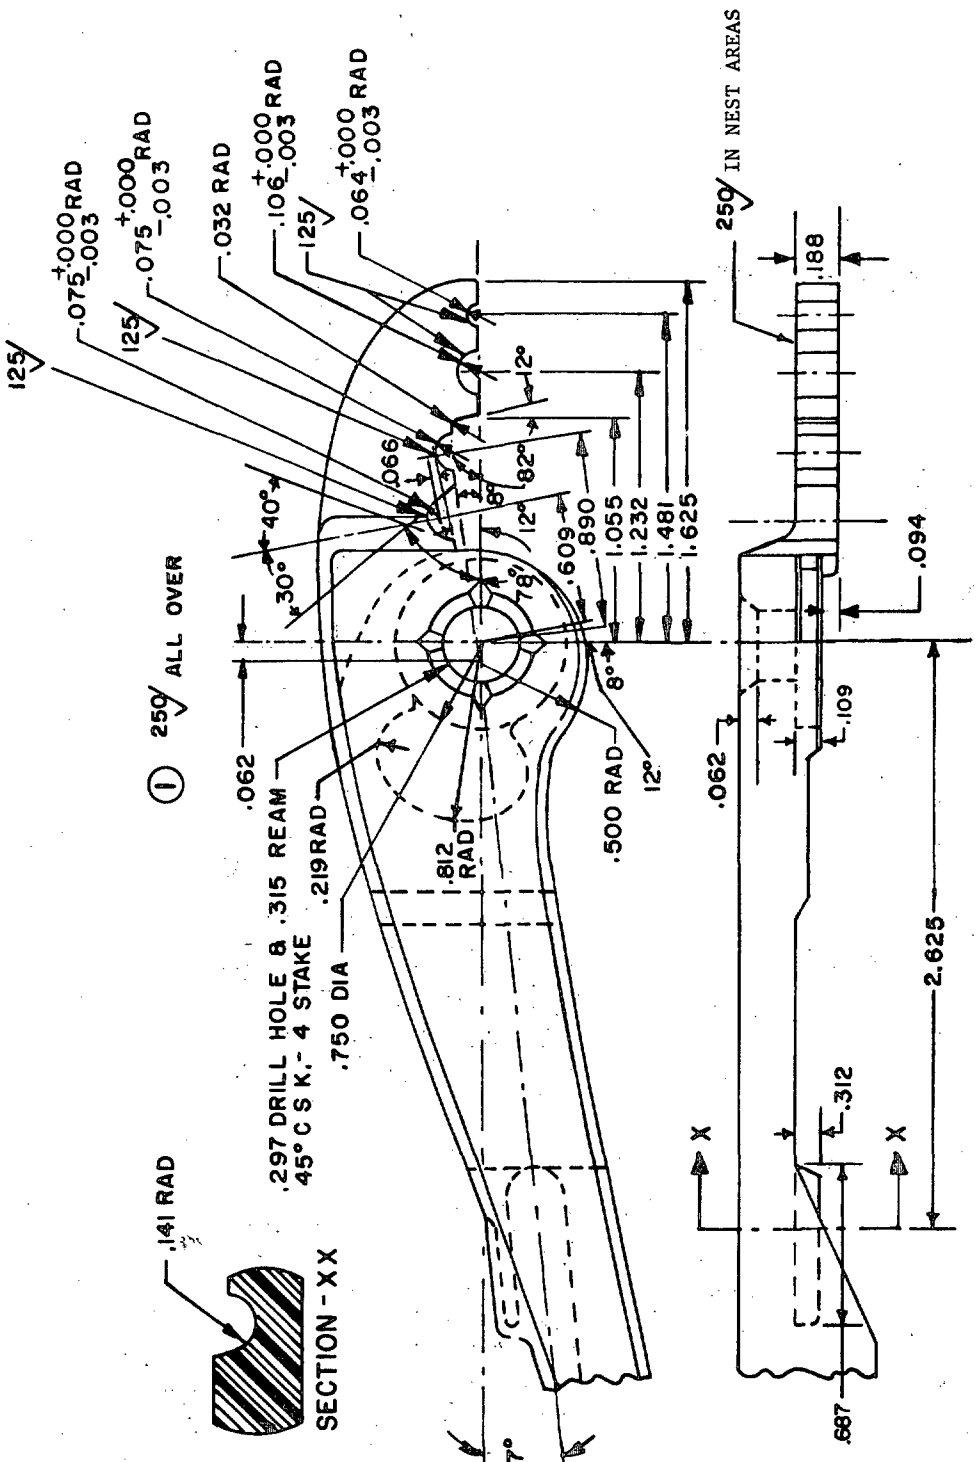

Detail 1. Upper jaw.

FIGURE 1. Crimping tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

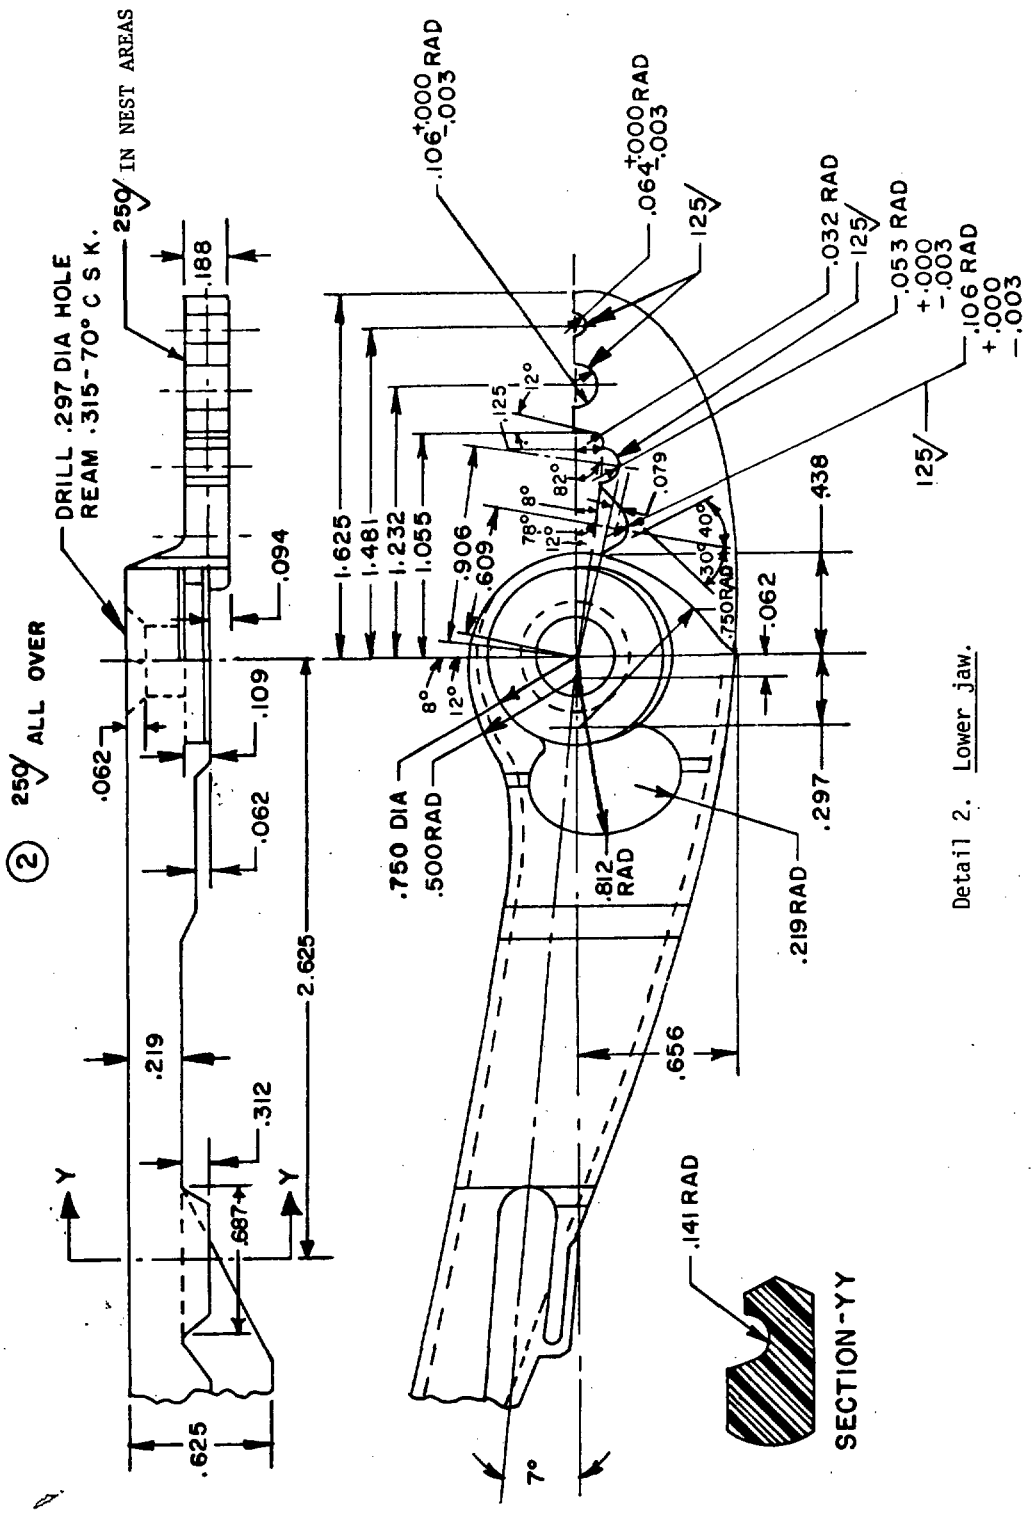

Detail 2. Lower jaw.

FIGURE 1. Crimping tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

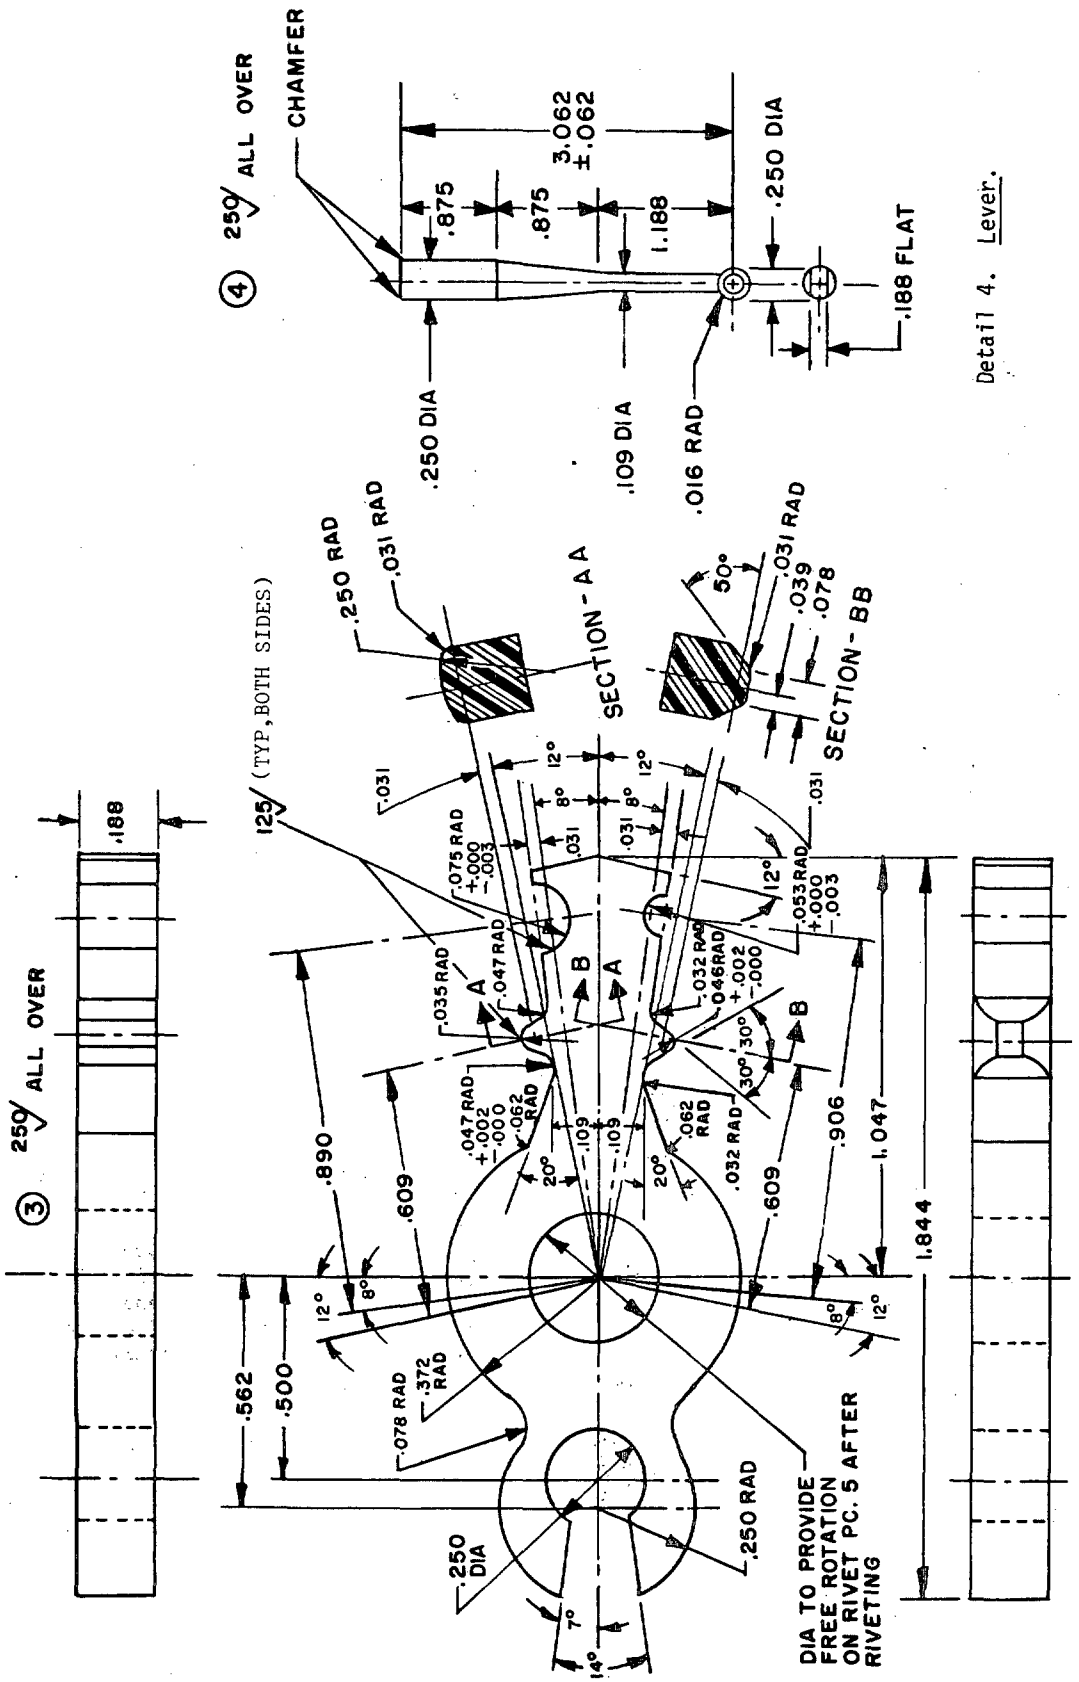


FIGURE 1. Crimping tool - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.000	.00	.106	2.69	.656	16.66
.002	.05	.109	2.77	.750	19.05
.003	.08	.125	3.18	.812	20.62
.031	.79	.141	3.58	.875	22.22
.032	.81	.188	4.78	.890	22.61
.035	.89	.219	5.56	.906	23.01
.039	.99	.250	6.35	1.047	26.59
.046	1.17	.297	7.54	1.055	26.80
.047	1.19	.312	7.92	1.188	30.18
.053	1.35	.315	8.00	1.232	31.29
.062	1.57	.372	9.45	1.238	31.45
.064	1.63	.438	11.13	1.481	37.62
.075	1.90	.500	12.70	1.625	41.28
.078	1.98	.562	14.27	1.844	46.84
.079	2.01	.609	15.47	3.062	77.77
.094	2.39	.625	15.88		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are +.010 (.25 mm) for decimals and ±.5° for angles.
4. Outline configuration optional within maximum dimensions shown.

FIGURE 1. Crimping tool - Continued.

TABLE I. List of Materials.

Piece 1/ number	Detail	Name	Number required	Material
1	1	Upper jaw	1	Steel
2	2	Lower jaw	1	Steel
3	3	Selective jaw	1	Steel
4	4	Lever	1	Steel 1/
5	---	Rivet oval countersunk head (size to suit)	1	Steel 1/

1/ Pieces 1 and 2 shall be made of forged carbon vanadium steel, .80 to .90 carbon, .60 to .90 manganese, .10 to .15 vanadium, hardened to prevent wear in bearing areas adjacent to gripping surface. Piece 3 shall be made of carbon vanadium steel (same analysis as pieces 1 and 2) and hardened to Rockwell C40 to C45. Pieces 4 and 5 shall be made of carbon steel composition C1045, C1050, C1144, or C1145 hardened to Rockwell C35 to C55.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Crimping tool movement: There shall be no excessive sidewise movement, play, or other indication of looseness in riveted joint when crimping tool is opened and closed.

Machined surfaces: All corners on the machined surfaces of jaws to be broken with .008 inch radius unless otherwise specified.

Handle load test: Shall be conducted in accordance with GGG-P-471, using 1/8 inch insert between jaws and applying a test load of 920 inch pounds. Deflection under load shall not be more than .56 inch. Permanent set shall not be more than .03 inch.

Intended use:

a. Crimping tool is designed for installing Type I, Class 1 pressure grip solderless terminals, Navy cable sizes 1 to 9 in accordance with MIL-T-7928. Selective jaw may be set either for crimping lug sizes 1-5 or 6-9. Procedures for changing setting of selective jaw are as follows:

(1) Open jaws of tool.
(2) Snap lever, piece 4, from retainer.
(3) Shift lever to opposite retainer and lock into position. If lever is in neutral position and jaws closed, selective jaw should automatically snap into the 1 to 5 position.

b. Terminal crimping notches designated 1-5 and 6-9 are intended for crimping Type I, Class 1 terminals in accordance with MIL-T-7928, Navy cable sizes 1-5 and 6-9. Notches designated .128 inch diameter, .213 inch diameter, .150 inch diameter, and .106 inch diameter are intended for crimping the waterproof barrels of terminals conforming to MIL-E-16366, over the conductor insulation.

c. Crimping tool is also designed for crimping terminal lugs conforming to MS20659-161 through -166 and MS21003 through MS21015.

Lug terminal: Lug terminal (Type WT) formerly covered by MIL-E-16366 has been replaced by Type I, Class 1 of MIL-T-7928.

Tools check: Tools shall be checked with MIL-C-22520/26 gages with tool in maximum closed position.

Test requirements not applicable are as follows:

Crimping operation Type 2 tools.
Locator.
Ratchet.
Handle, indentor and die return operation.
Ratcheting mechanism.

Part number: M22520/25-01

Custodian:
Navy - AS

Review activities:
Navy - SH, EC, OS

User activity:
Navy - MC

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-N866)

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-020/5999

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.