
MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND OR POWER ACTUATED, WIRE TERMINATION, PNEUMATIC TOOL FOR WIRE BARREL SIZES 20 THROUGH 28.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of specification MIL-C-22520.

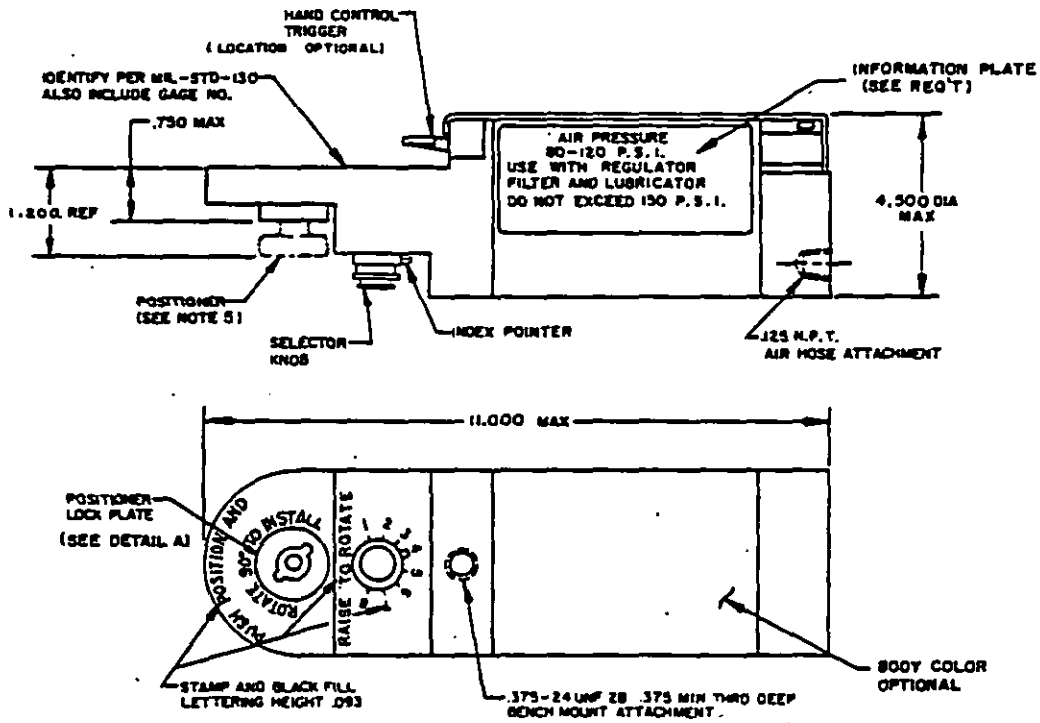


BASIC TOOL

PART NO.	FOR INSPECTION GAGING USE
M22520/28-01	M22520/3-1

FIGURE 1. Pneumatic tool, wire barrel sizes 20 through 28.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z.
Check the source to verify that this is the current version before use.

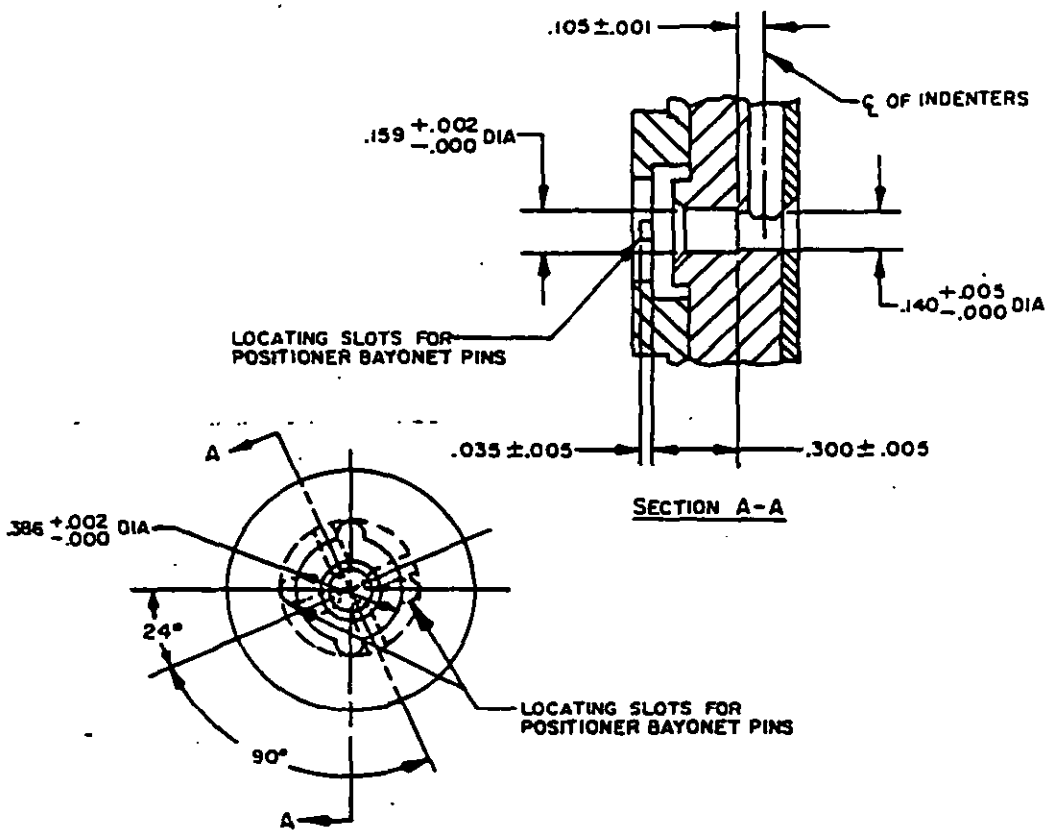


DETAIL A. Positioner lock plate.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.093	2.36	.159	4.04	.750	19.05
.002	.05	.105	2.67	.300	7.62	1.200	30.48
.005	.13	.125	3.18	.375	9.52	4.500	114.30
.035	.89	.140	3.56	.386	9.80	11.000	279.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. Unless otherwise specified, angle tolerance is ±1/2° or ±30'.
5. For applicable positioners see MIL-C-22520/2. This tool produces the same crimp as basic tool M22520/2-01.

FIGURE 1. Pneumatic tool, wire barrel sizes 20 through 28 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

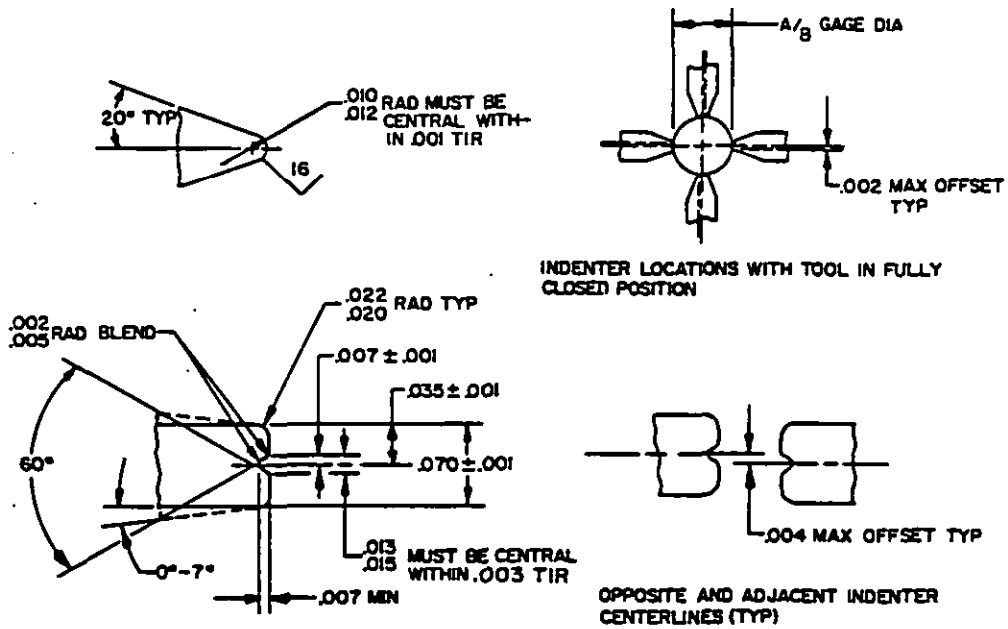

INDENTERS

Gaging limits of indenters


Selector number	Gage - inspection	
	A ±.0001 (.003) Go Dia.	B ±.0001 (.003) No Go Dia.
1	.0130 (.330)	.0180 (.457)
2	.0160 (.406)	.0210 (.533)
3	.0190 (.483)	.0240 (.610)
4	.0220 (.559)	.0270 (.686)
5	.0260 (.660)	.0310 (.787)
6	.0300 (.762)	.0350 (.889)
7	.0340 (.864)	.0390 (.991)
8	.0390 (.991)	.0440 (1.118)

INCHES	MM	INCHES	MM
.001	.03	.012	.30
.002	.05	.013	.33
.003	.08	.015	.38
.004	.10	.020	.51
.005	.13	.022	.56
.007	.18	.035	.89
.010	.25	.070	1.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance for decimals is ±.010 (.25 mm) and for angles is ±1/2° or ±30'.

FIGURE 2. Indenters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

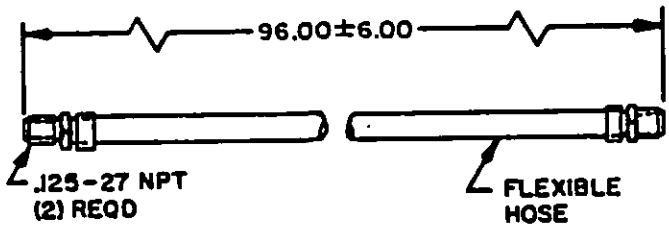

AIR SUPPLY HOSE
PART NO.
M22520/28-02

INCHES	MM
.125	3.18
6.00	152.4
96.00	2438.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 3. Air supply hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: Outline configuration optional within maximum dimensions shown on figure 1.

Indenters (see figure 2):
Material: Oil hardened tool steel, harden to Rockwell "C" 56-58.
Surface texture: Shall be as shown in accordance with ANSI B46.1-1962.

Positioners applicable: The basic tool shall use the positioners as specified in MIL-C-22520/2 and crimp the contacts accommodated by the positioners. The resulting crimp shall meet the requirement of this specification.

Operating air pressure: The tool shall make satisfactory crimps when operated at 80 to 120 lb_f/in^2 air pressure.

Tool control: The tool shall have a self contained control mechanism which is activated by the hand trigger. Means shall also be provided to make possible the actuation of the tool with a remote control. The tool shall have an integral adjustment that will simultaneously engage one control and disengage the other control. It shall not be possible to actuate the tool with both controls concurrently.

Information plate: The information plate shall be in accordance with MIL-P-19834. It shall show the information given in figure 1 plus instructions for changing from one control means to the other. More than one plate may be used to provide this information.

Positioner lock plate: The positioner lock plate shall provide positive detent for bayonet lock pins.

Air supply hose (see figure 5): The air supply hose (M22520/28-02) shall be supplied with basic tools M22520/28-01 or M22520/29-01 or can be ordered separately.

Weight: The weight of the tool shall not exceed 5 pounds.

Ratcheting mechanism: The difference between the first and third crimp measurements shall not exceed .004 inch(.10) when tested as follows: With 80 lb_f/in^2 air pressure supplied to the tool, crimp a .090(2.29) diameter copper rod; measure and record the rod thickness between opposing indents. Starting with a low air pressure that will not allow the indenters to open when crimped on the rod, slowly increase the air pressure until the ratchet just releases and the indenters open. At this same air pressure, crimp the rod a third time; measure and record the thickness between indents. The difference between the first and third measurements shall not exceed .004 inch (.10).

Qualification inspection: Qualification inspection shall consist of those examinations and tests specified in MIL-C-22520 for type 1 tools except that the following tests shall be omitted:

a. Humidity (steady state).
b. High compression force.
c. Compression force.
d. Low temperature crimp.
e. Salt spray (corrosion).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS - Continued.

Bench mount accessory: Shall conform to MIL-C-22520/30, part number M22520/30-01.

Foot valve accessory: Shall conform to MIL-C-22520/30, part number M22520/30-02.

Part number: Basic tool M22520/28-01
Air supply hose M22520/28-02

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - AV,GL,MI,AR,WC
Navy - EC,OS,SH
Air Force - 11,12,17,99
DLA-ES

User activities:
Army - AT,ME
Navy - MC,YD
Air Force - 19

Preparing activity:
Navy - AS

Agent:
DLA-ES

(Project 5130-0256)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:48Z
Check the source to verify that this is the current version before use.