
MILITARY SPECIFICATION SHEET

# CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR WIRE BARREL SIZES 20 THROUGH 26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

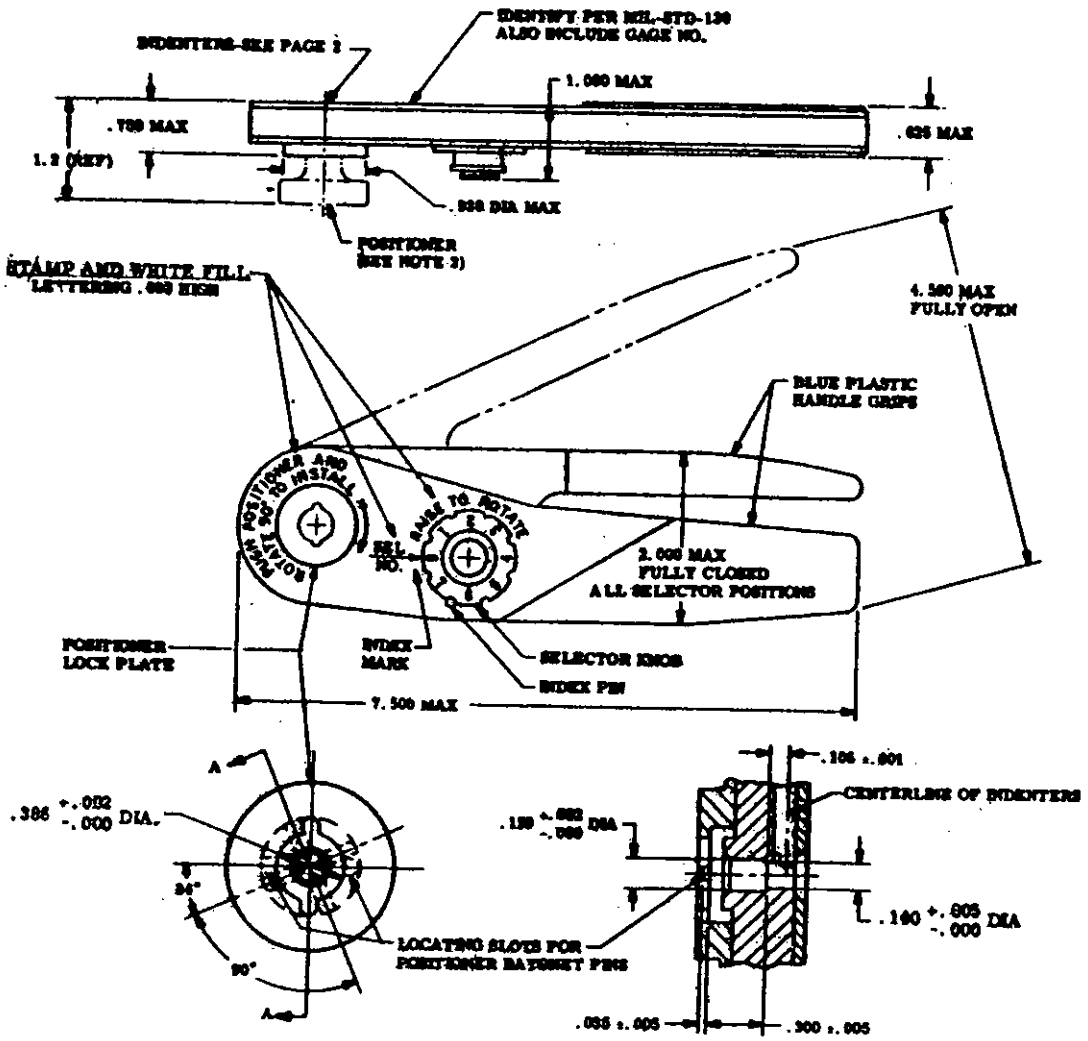


| PART NO. | BODY COLOR | FOR INSPECTION GAGING USE | SUPERSEDES | |
|---|---|---|---|---|
| | | | INTERCHANGEABLE WITH | NOT INTERCHANGEABLE WITH |
| M22520/2-01 | BLUE | M22520/3-1 | M22761 | M83196-1 |

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.
2. FOR APPLICABLE POSITIONERS SEE SUCCEEDING PAGES


REQUIREMENTS:

1. THE FORCE REQUIRED TO MAKE SATISFACTORY CRIMPS SHALL NOT EXCEED 45 POUNDS.
2. OUTLINE CONFIGURATION OPTIONAL WITHIN MAXIMUM DIMENSIONS SHOWN.
3. THE POSITIONER LOCK PLATE SHALL PROVIDE POSITIVE DETENT FOR BAYONET LOCK PINS.
4. THE WEIGHT OF THE BASIC TOOL SHALL NOT EXCEED 1.0 POUND.
5. SIZE 16 WIRE SIZE OF MIL-C-81511 CONTACTS CAN BE CRIMPED, OTHERWISE THE MAXIMUM WIRE SIZE ACCOMMODATED BY THIS TOOL IS SIZE 20 WIRE.



FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

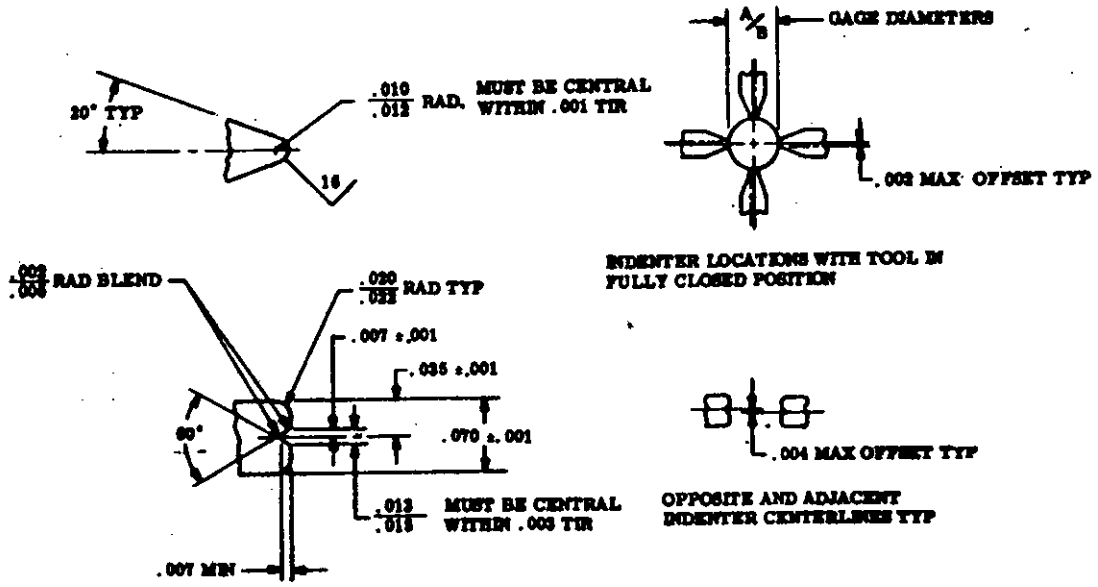


INDENTERS

GAGING LIMITS OF INDENTERS

| SELECTOR NUMBER | GAGE - INSPECTION | |
|---|---|---|
| | A ±.0001 GO DIA | B ±.0001 NO GO DIA |
| 1 | .0130 | .0180 |
| 2 | .0160 | .0210 |
| 3 | .0190 | .0240 |
| 4 | .0230 | .0270 |
| 5 | .0260 | .0310 |
| 6 | .0300 | .0350 |
| 7 | .0340 | .0390 |
| 8 | .0390 | .0440 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. MATERIAL: OIL HARDENED TOOL STEEL, HARDEN TO ROCKWELL "C" 56-58.
2. SURFACE TEXTURE SHALL BE AS SHOWN IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

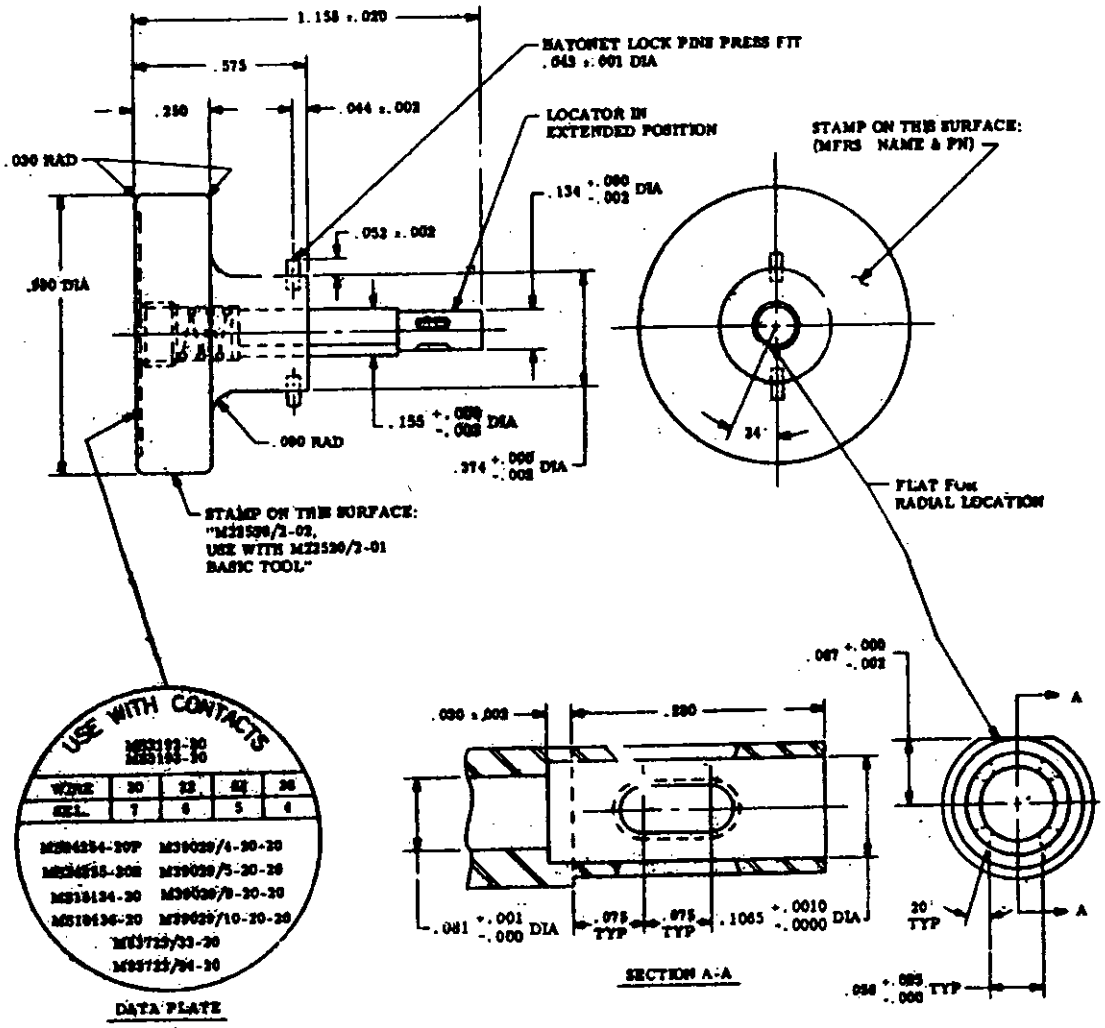





DATA PLATE

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-02 | BLUE | M83192-20-20 M524254-20P M518134-20<br>M83193-20-20 M524255-20S M518136-20<br>M39029/4-20-20 M39029/5-20-20<br>M39029/9-20-20 M39029/10-20-20<br>M83723/33-20 M83723/34-20 | M83106-1PA<br>M27631-1 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.

REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

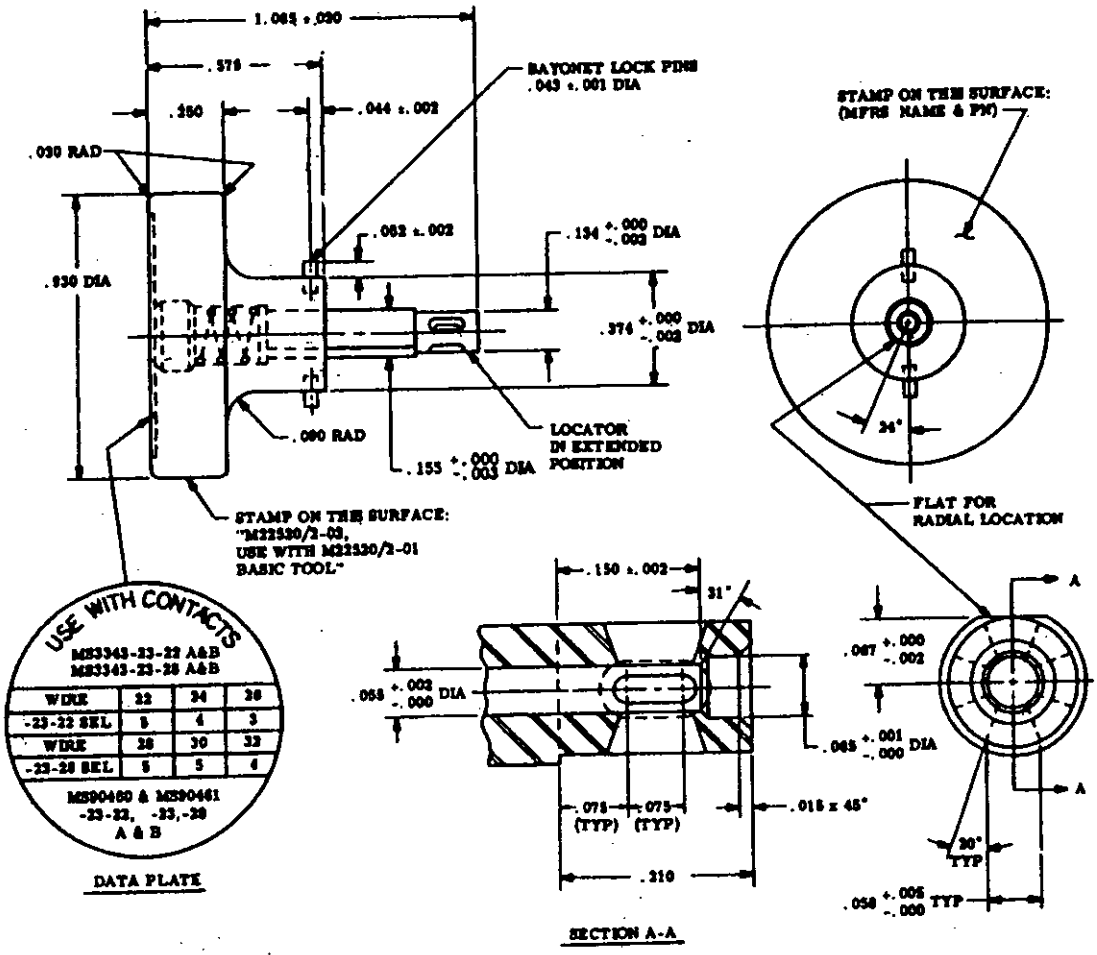


POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-03 | BLUE | M83343-23-22(A&B) M890460-23-28(A&B)<br>M83343-23-28(A&B) M890461-23-22(A&B)<br>M890460-23-22(A&B)M890461-23-28(A&B) | MS3196-2PA<br>MS27831-2 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

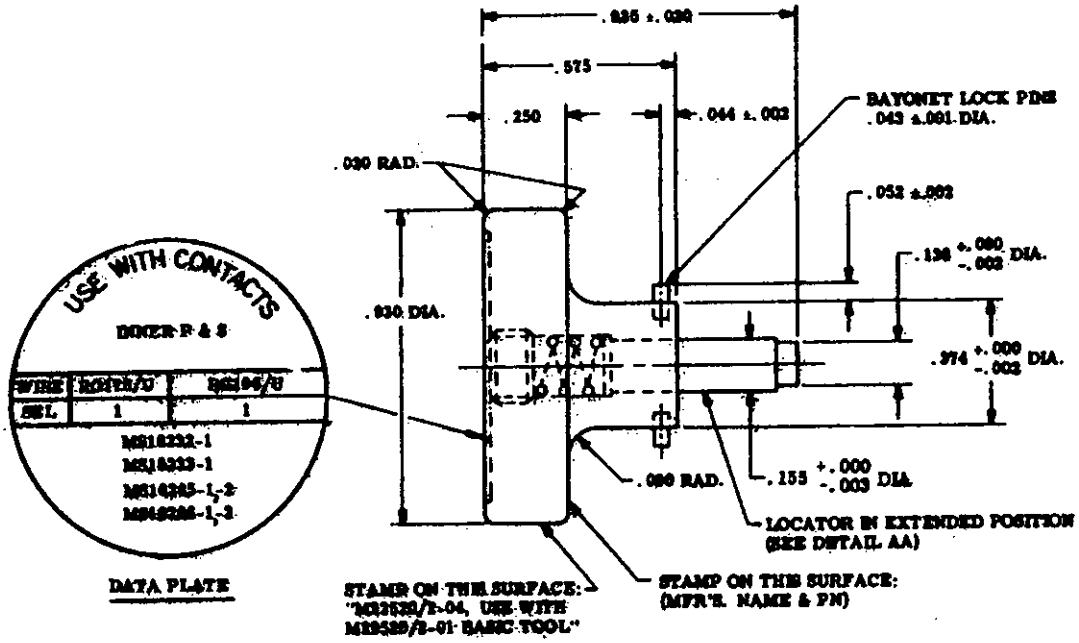

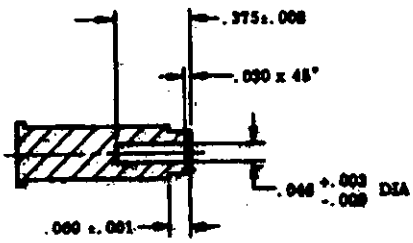
DETAIL AA

POSITIONER


| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-04 | BLUE | INNER PIN AND SOCKET<br>M81823-1 M81823-2<br>M81825-1 M81825-2<br>M81826-1 M81826-2 | M83198-3P |


NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMAL ±.010. ANGLES ±1/2°

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED SPEC NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63/ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

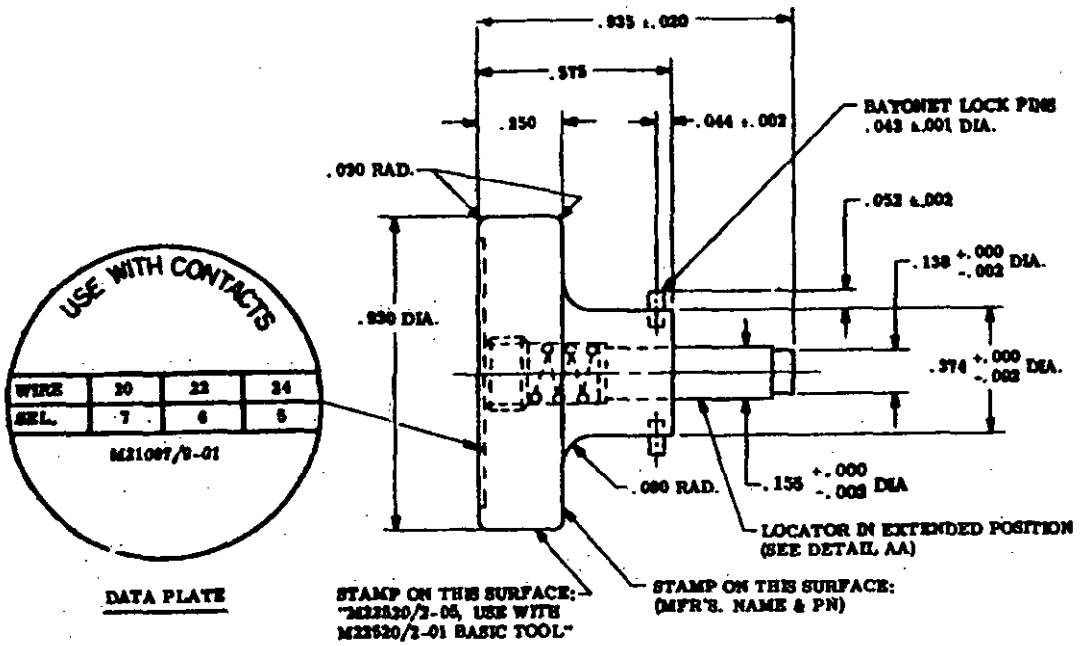

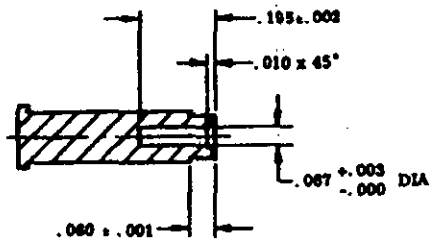
DETAIL AA

POSITIONER


| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-05 | BLUE | M21097/9-01 | MS3198-4P & MS27831-3 |


NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMAL ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

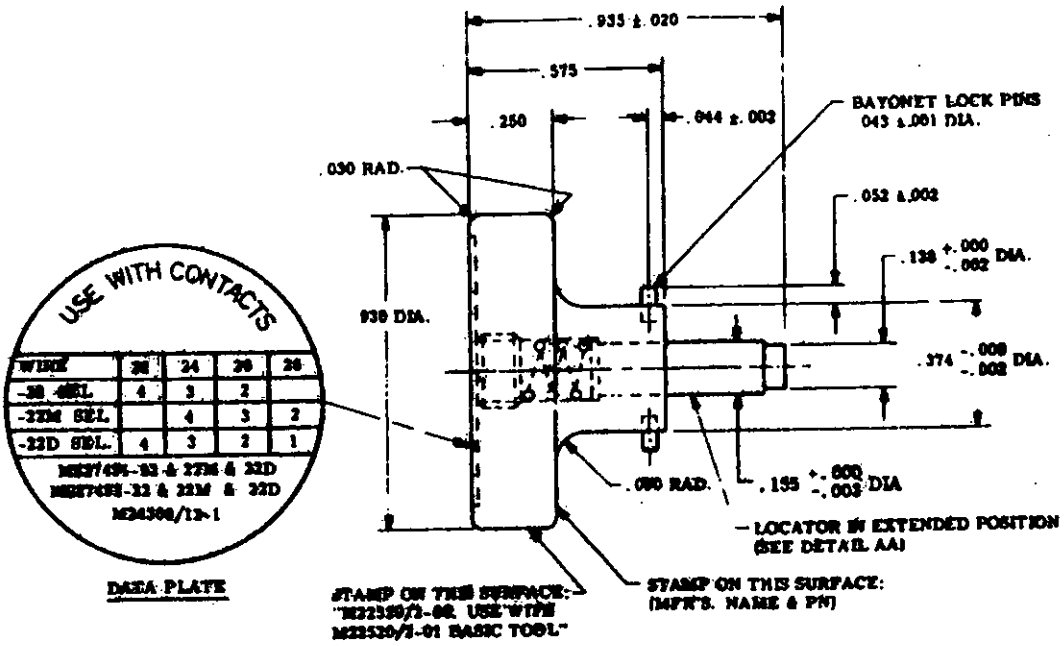

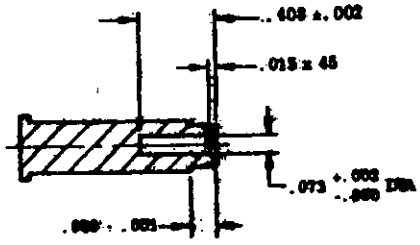
DETAIL AA

POSITIONER


| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-06 | BLUE | M27499-22 & 22M & 22D<br>M27499-22 & 22M & 22D<br>M24308/12-1 | MS3190-6P<br>MS27831-5 |

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ±.010. ANGLES ±1/2°.


REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED SPEC NO. QQ-S-763. CLASS 304. COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

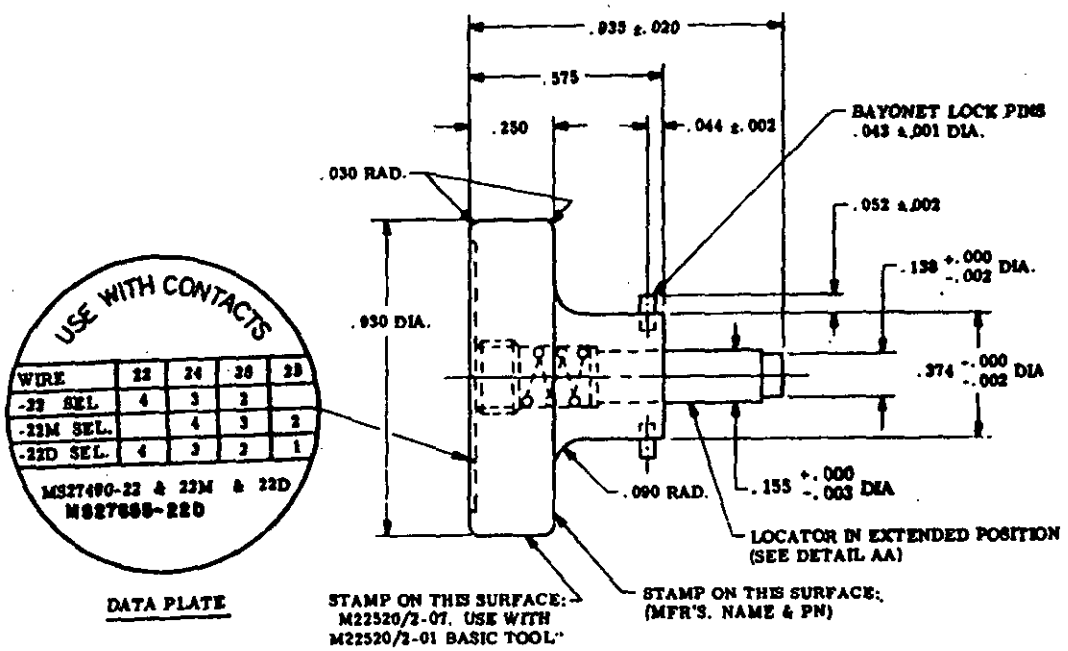


DATA PLATE

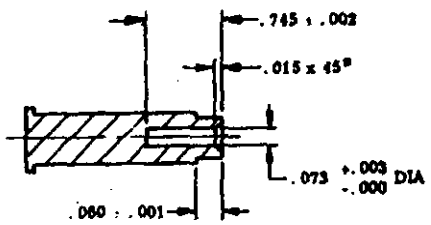


DETAIL AA

POSITIONER


| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | *SUPERSEDES* - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-07 | BLUE | MS27490-22 & 22M & 22D M8276B8-22D | MS3198-7P & MS27831-6 |

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.


REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005R MAX.
5. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46.1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

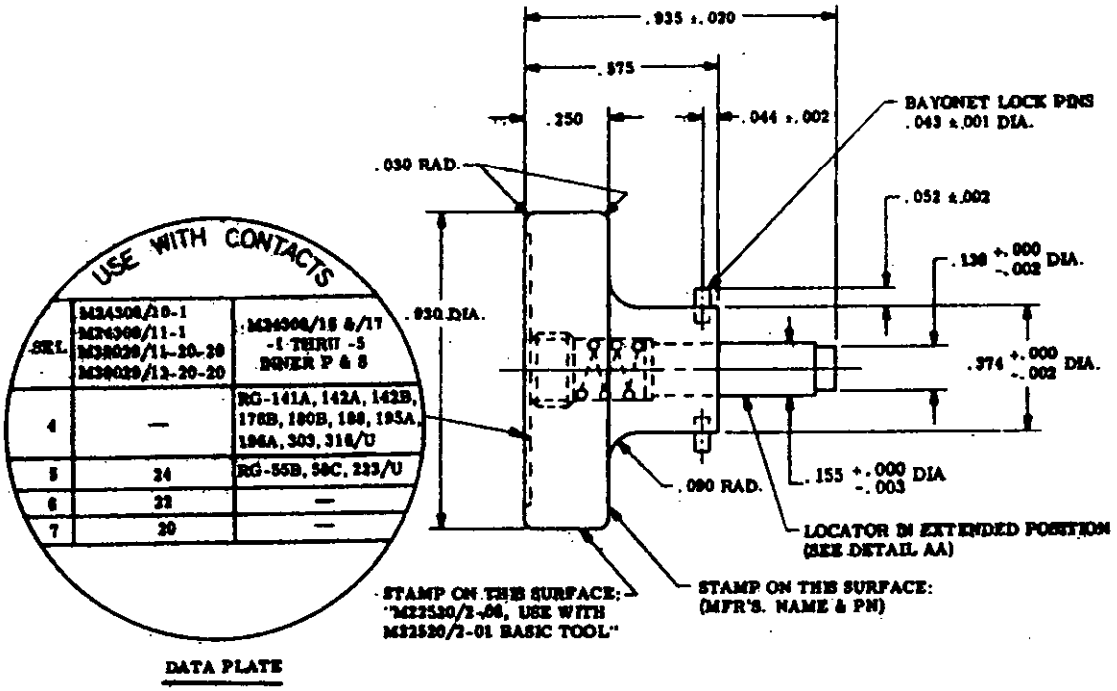


DATA PLATE

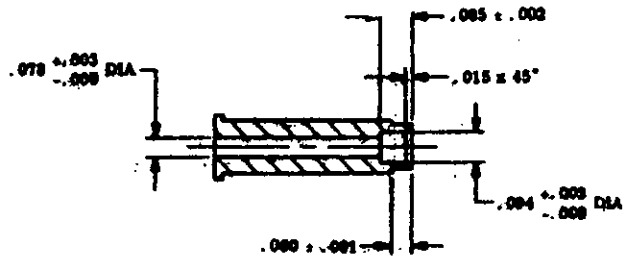


DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|
| M22520/2-06 | BLUE | M 24308/10-1 M24308/11-1<br>M39029/11-20-20<br>M39029/12-20-20 | MS3196-5P & MS27871-4 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/8.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

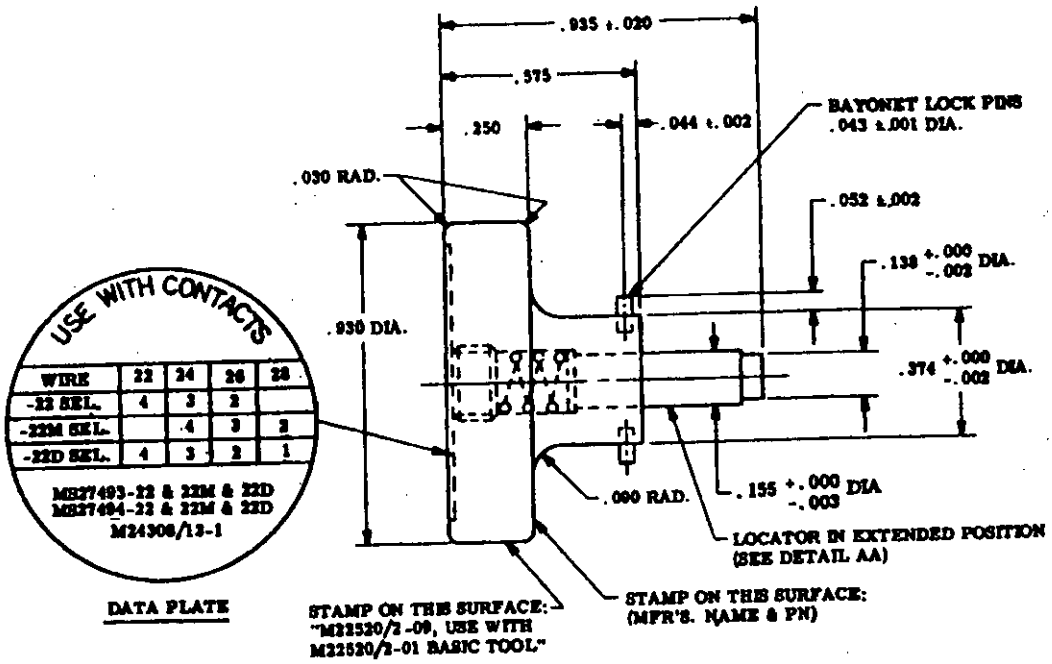

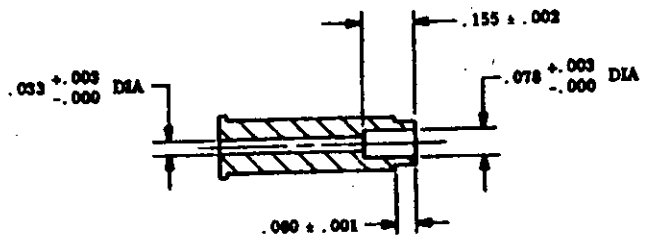
DETAIL AA

| POSITIONER | | | |
|---|---|---|---|
| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | SUPERSEDES - INTERCHANGEABLE WITH |
| M22520/2-09 | BLUE | M827493-22 & 22M & 22D<br>M827494-22 & 22M & 22D<br>M24308/13-1 | MS3196-8P<br>MS27831-7 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63/ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

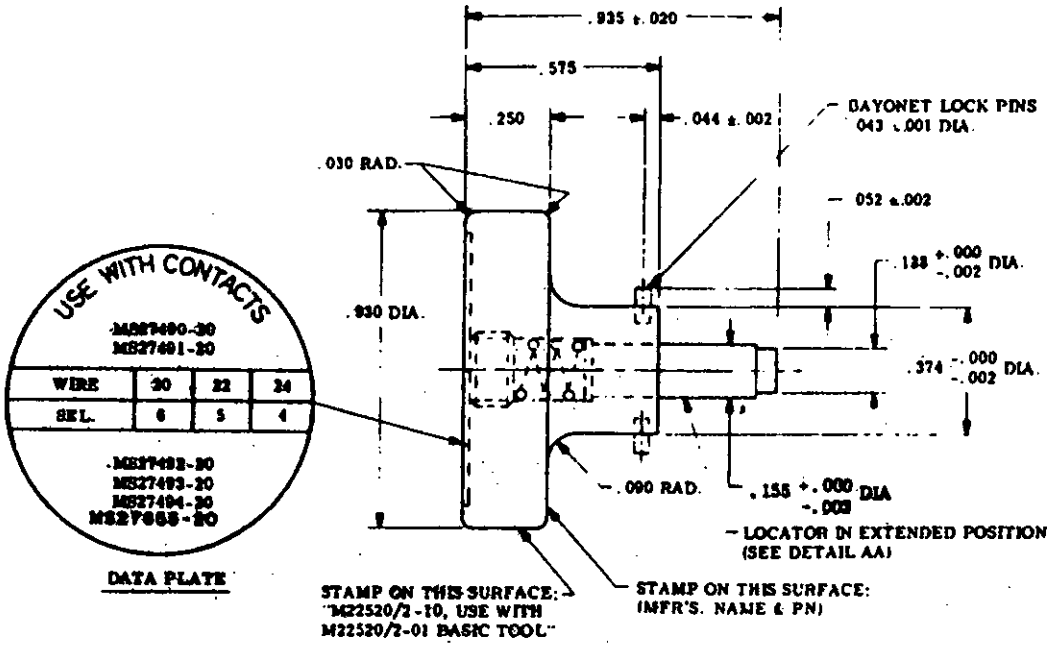

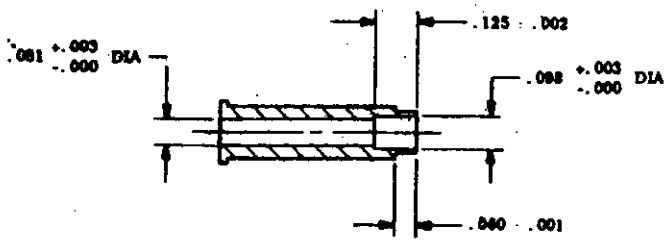
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | | SUPERSEDES - INTERCHANGEABLE WITH |
|---|---|---|---|---|
| M22520/2-10 | BLUE | MS27490-20<br>MS27491-20<br>MS27492-20 | MS27493-20<br>MS27494-20<br>MS27656-20 | MS3198-9P<br>MS27831-8 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

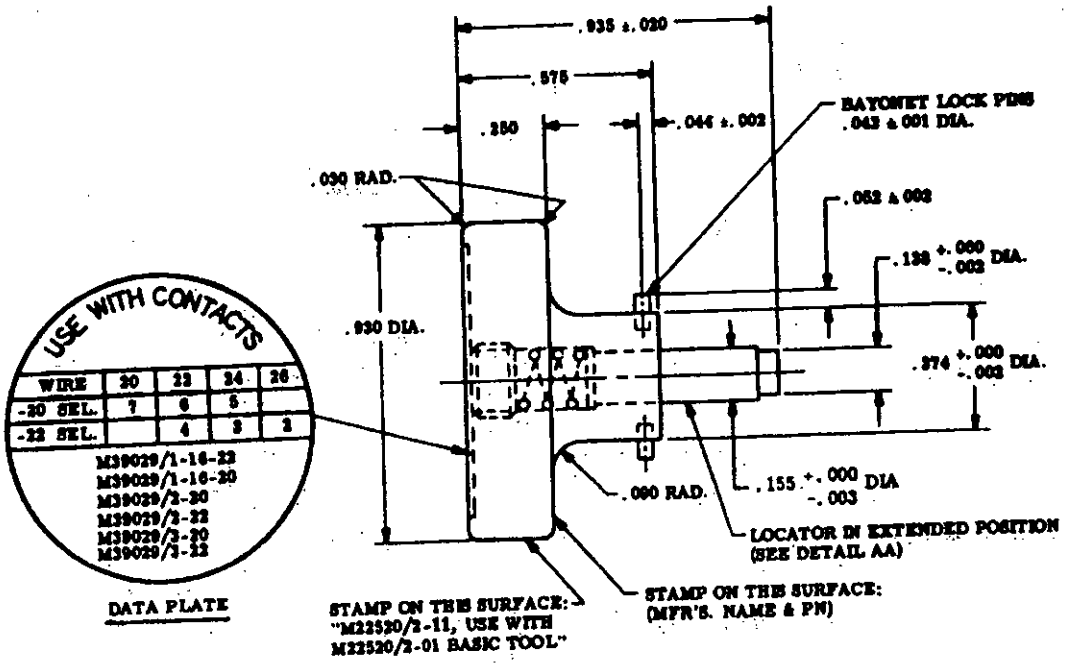

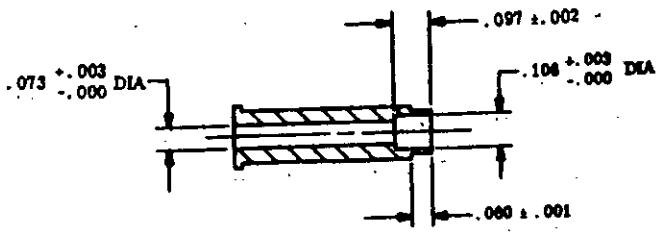
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) | |
|---|---|---|---|
| M22520/2-11 | BLUE | M39029/1-16-20<br>M39029/1-16-22<br>M39029/2-20-20 | M39029/2-22-22<br>M39029/3-20-20<br>M39029/3-22-22 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE $\sqrt{63}$ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

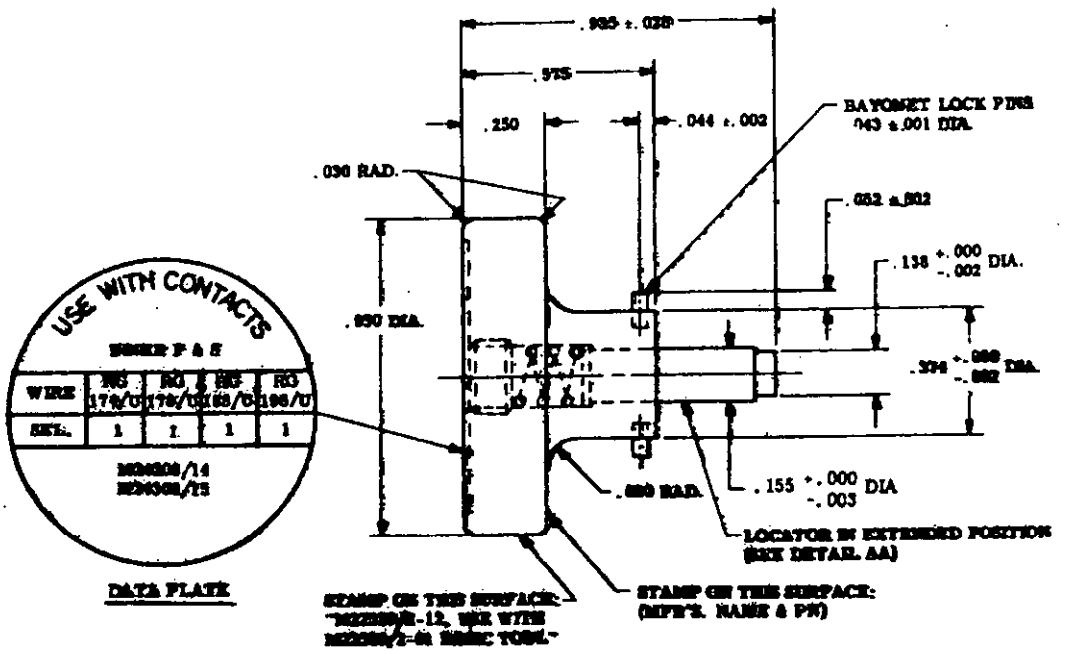

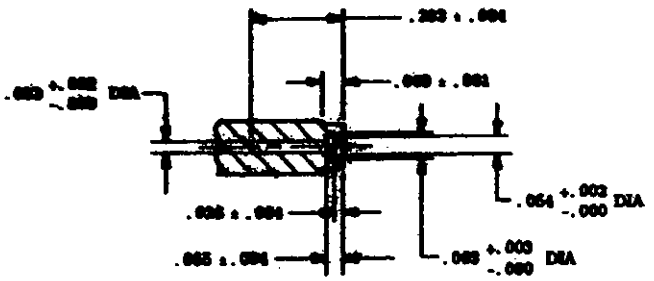
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-13 | BLUE | INNER PIN AND SOCKET<br>M24308/14<br>M24308/15 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:


1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

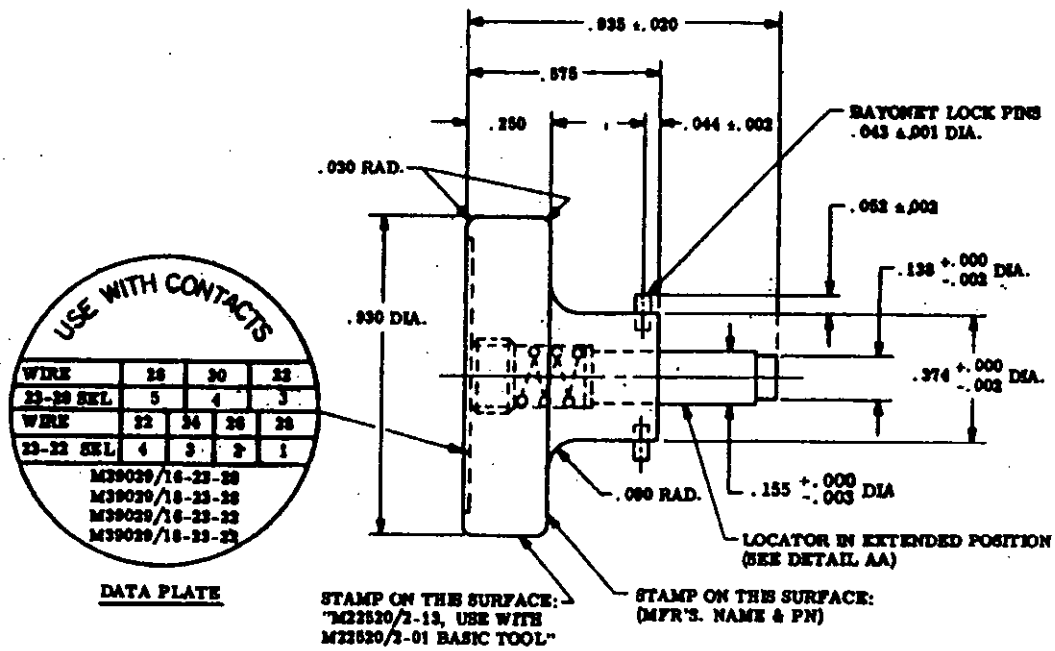

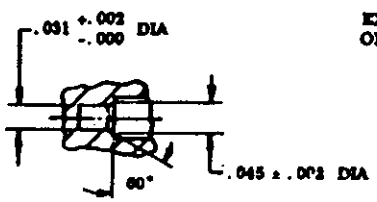
POSITIONER
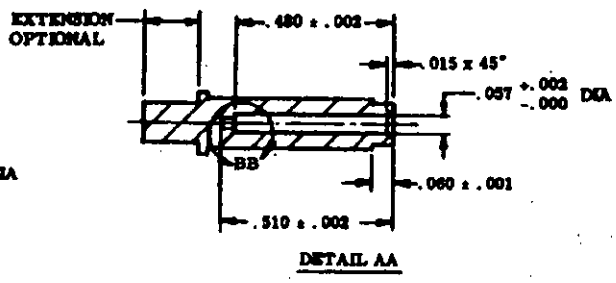
| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-13 | BLUE | M39029/16-23-20<br>M39029/16-23-24<br>M39029/16-23-22<br>M39029/16-23-22 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

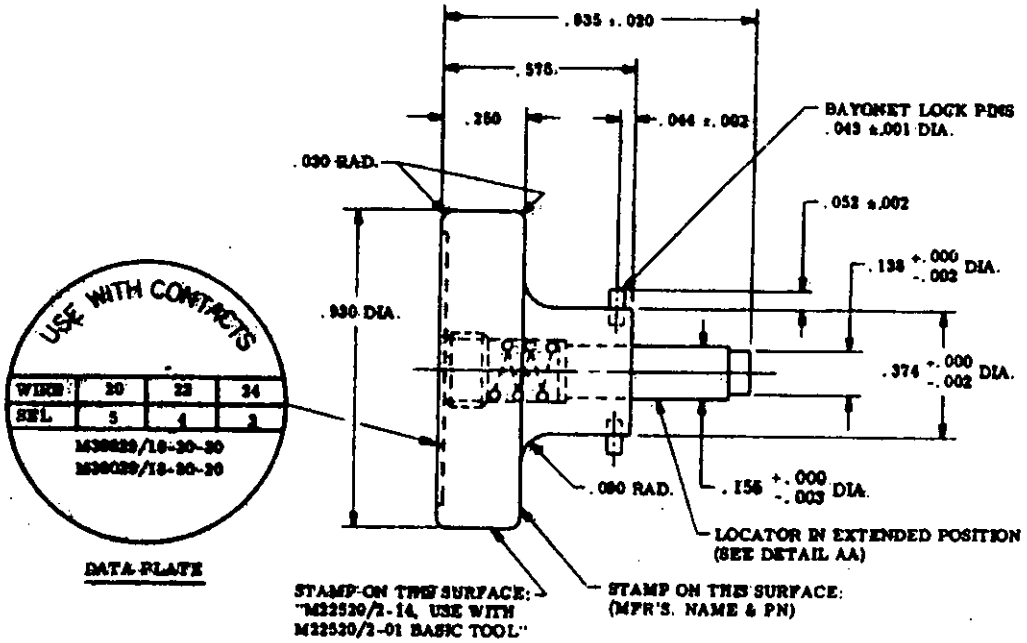

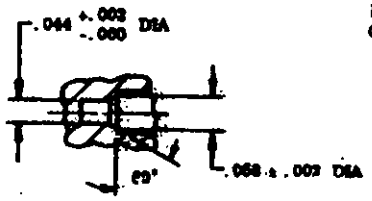
DETAIL BB

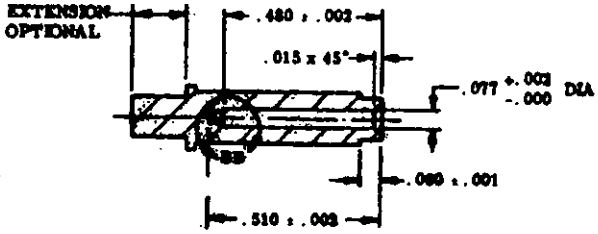


DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-14 | BLUE | M39029/16-20-20<br>M39029/18-20-20 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

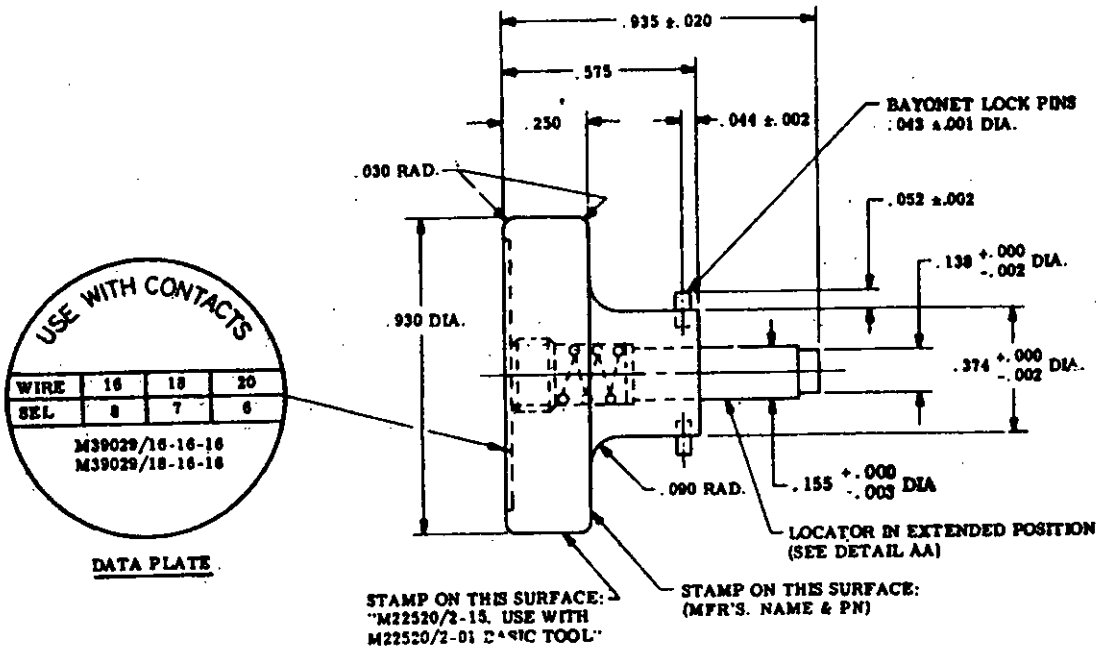

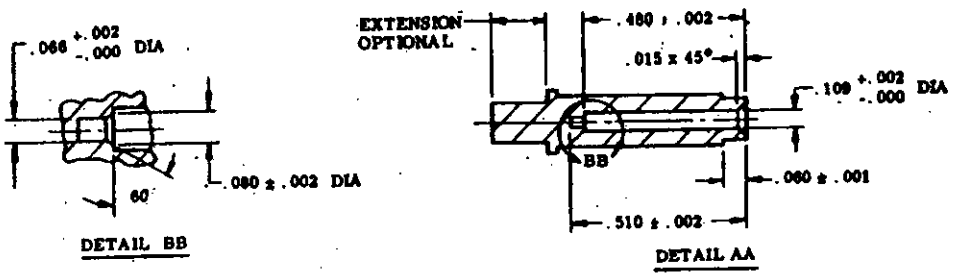
POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-15 | BLUE | M39029/16-16-16<br>M39029/18-16-16 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010. ANGLES ± 1/2°.

REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763. CLASS 304. COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005R MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

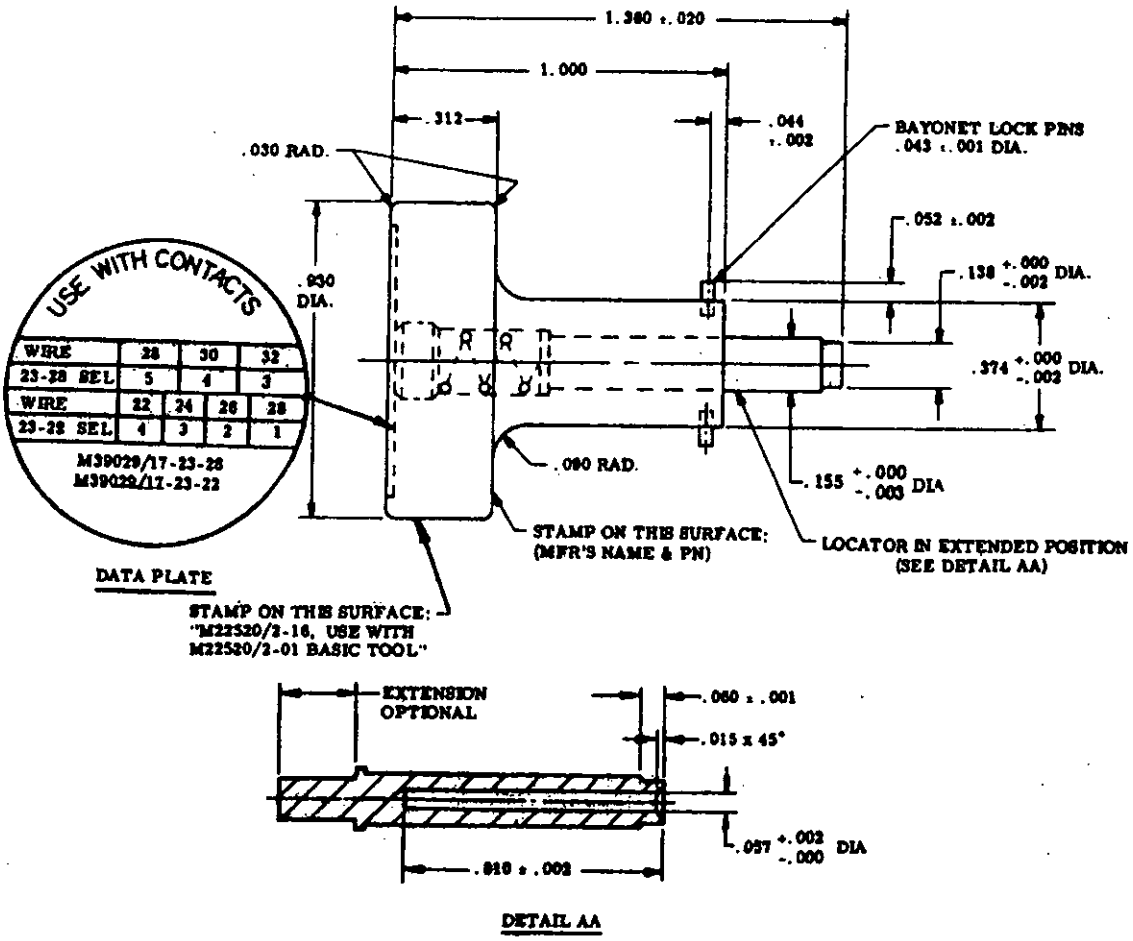


**POSITIONER**

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-16 | BLUE | M39029/17-23-28<br>M39029/17-23-22 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

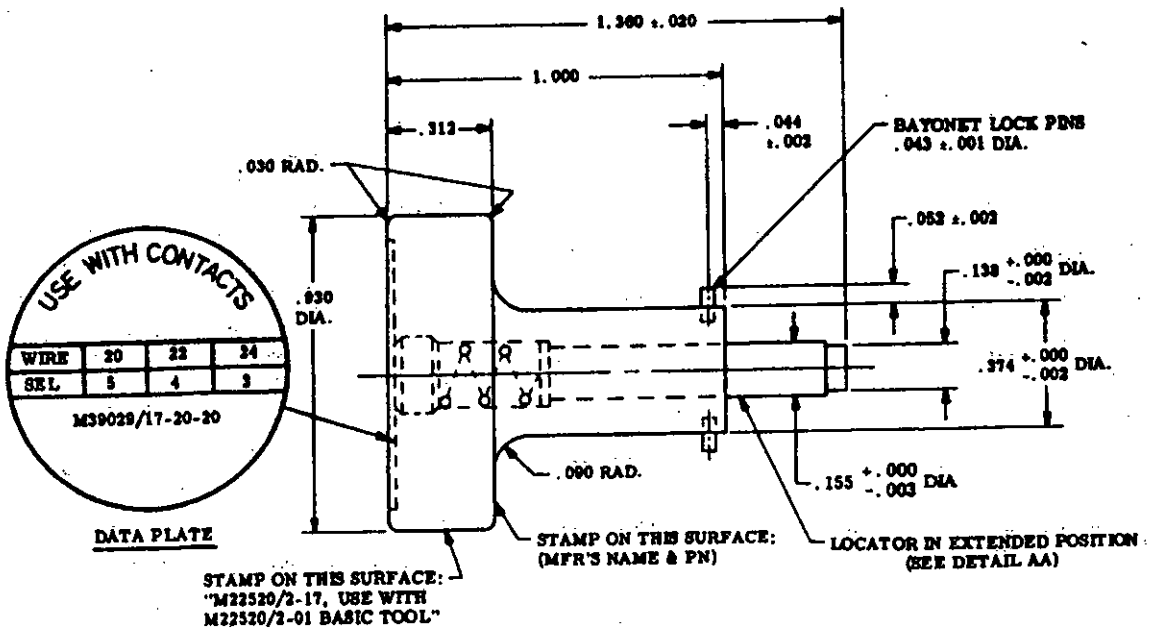

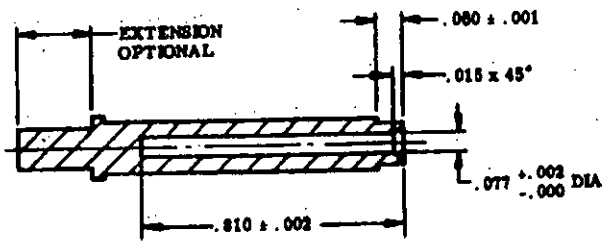
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-17 | BLUE | M39029/17-20-20 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 √ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

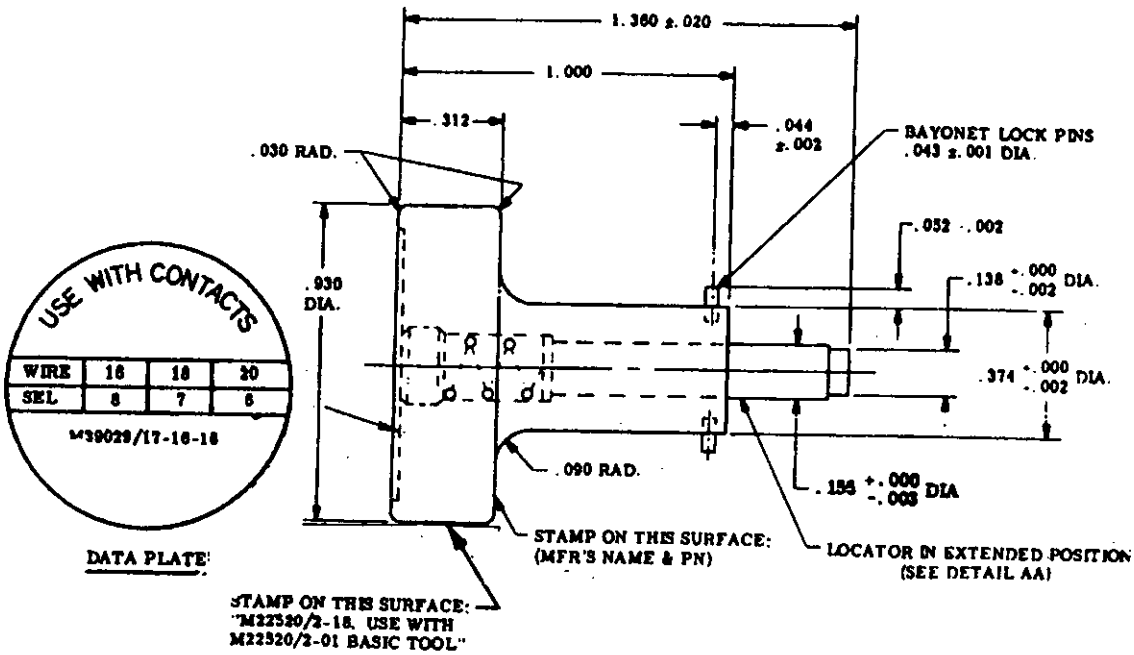

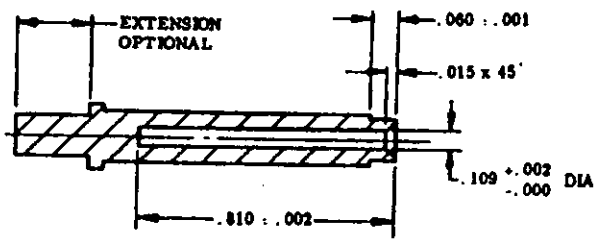
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-16 | BLUE | M39029/17-16-16 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010. ANGLES ±1/2°.

REQUIREMENTS:


1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304. COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

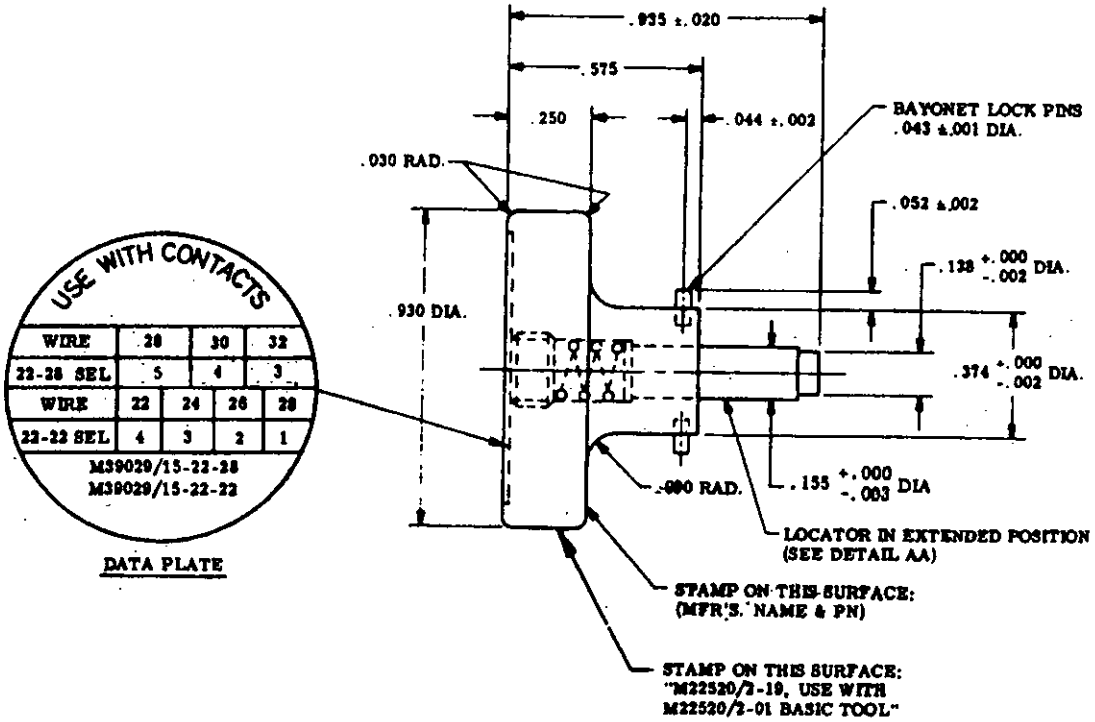


DATA PLATE

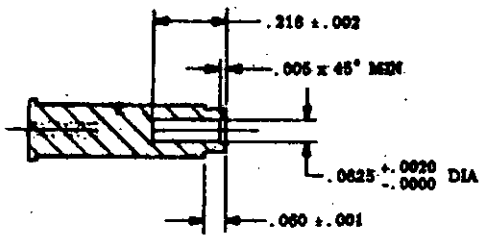


DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-19 | BLUE | M39029/15-22-28<br>M39029/15-22-22 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.

REQUIREMENTS:


1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63/ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

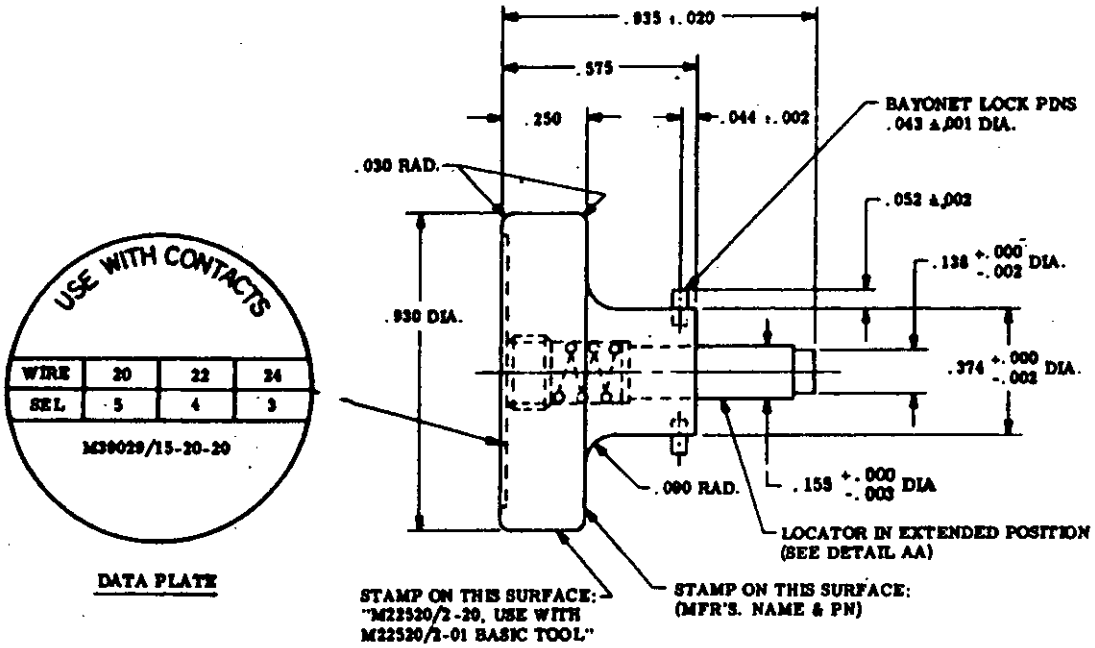


DATA PLATE

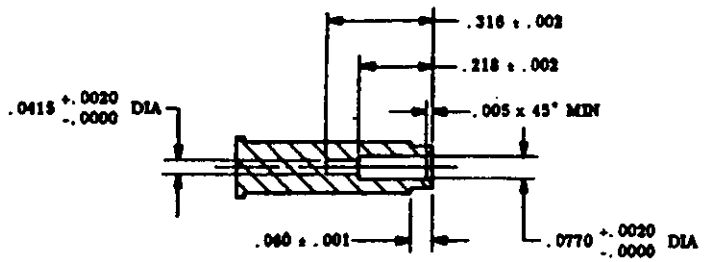


DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-20 | BLUE | M39029/15-20-20 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962(ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

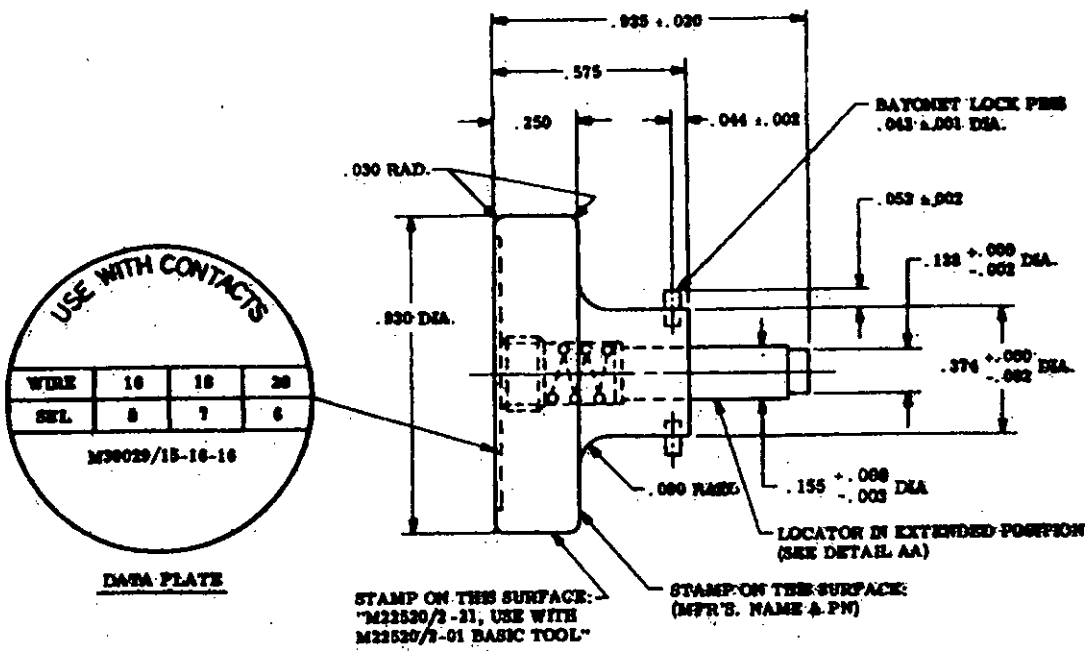

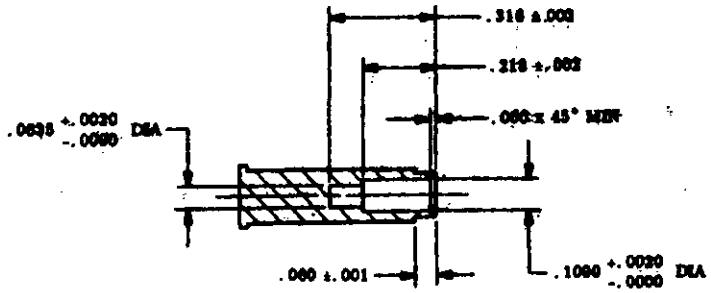
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-21 | BLUE | M39029/15-16-16 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 3 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63/ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

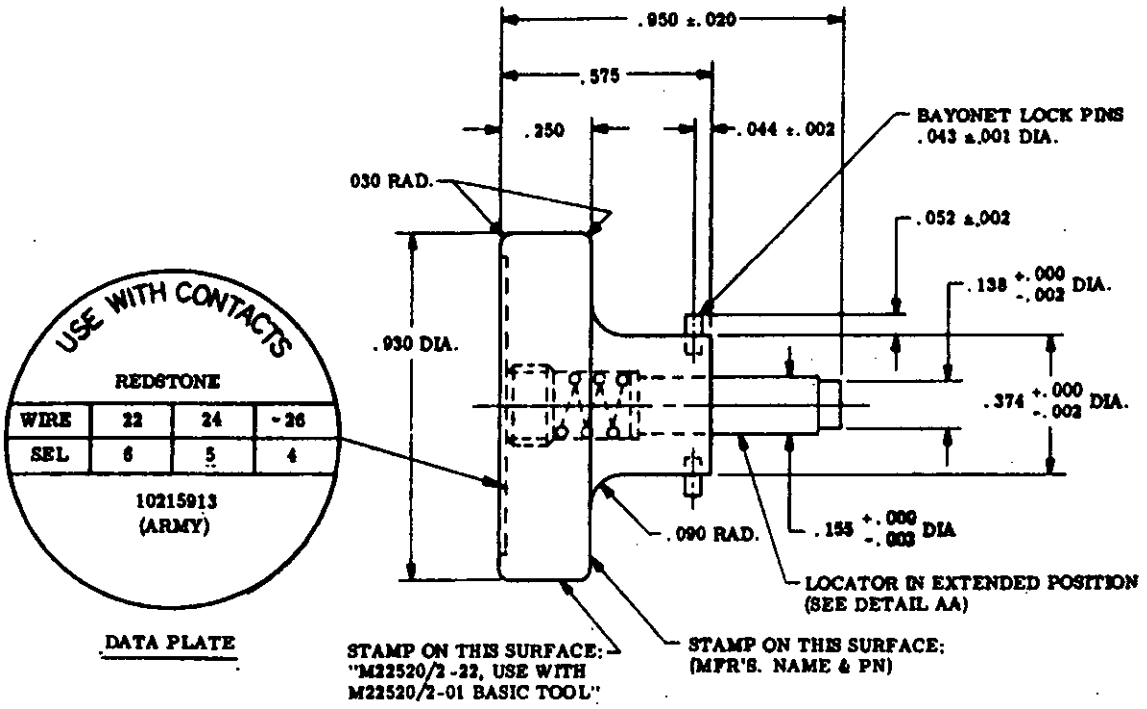

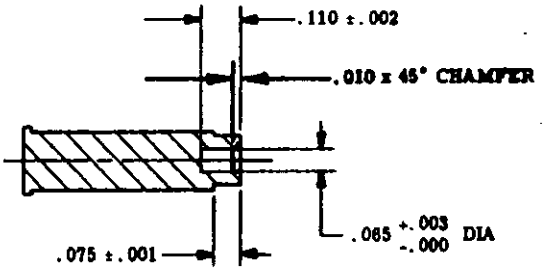
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-22 | BLUE | 10215913 (ARMY) |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ±1/2°


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/8.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ± 1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

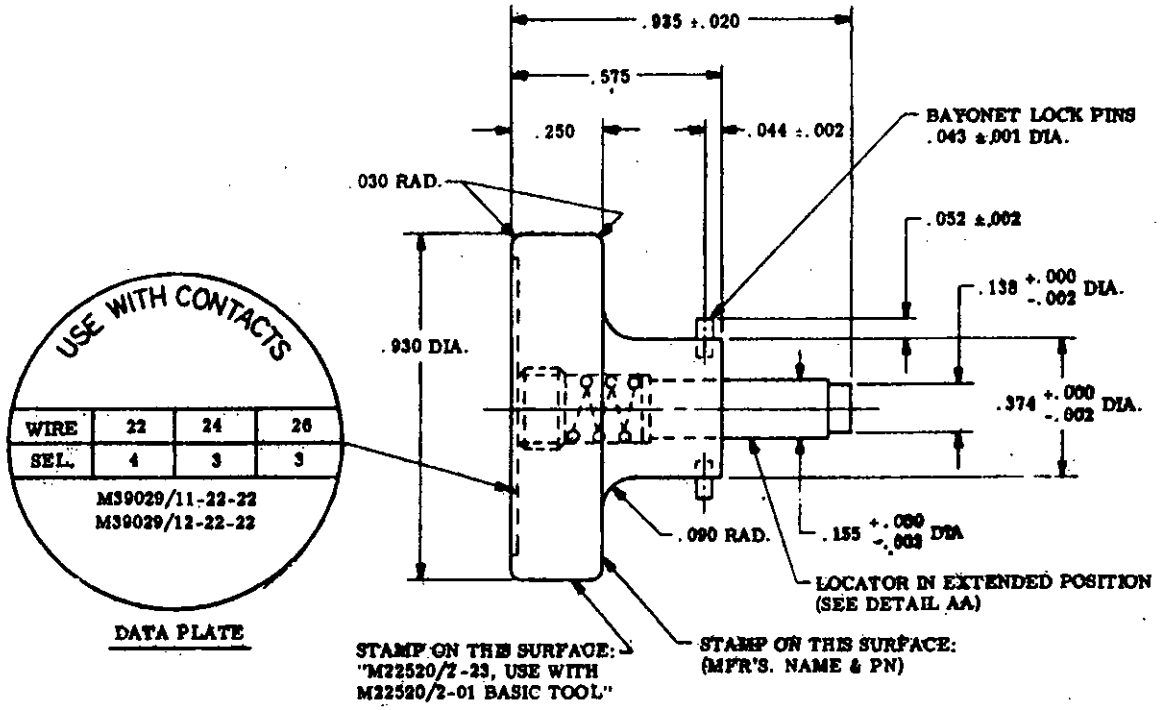

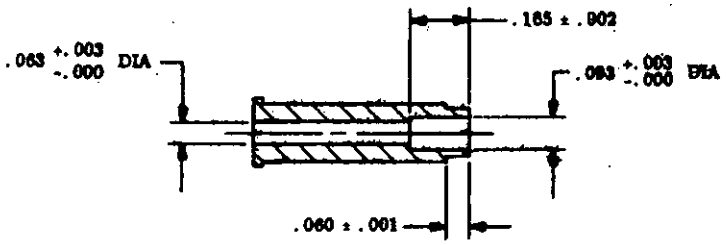
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-23 | BLUE | M39029/11-22-22<br>M39029/12-22-22 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ± 1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63/ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

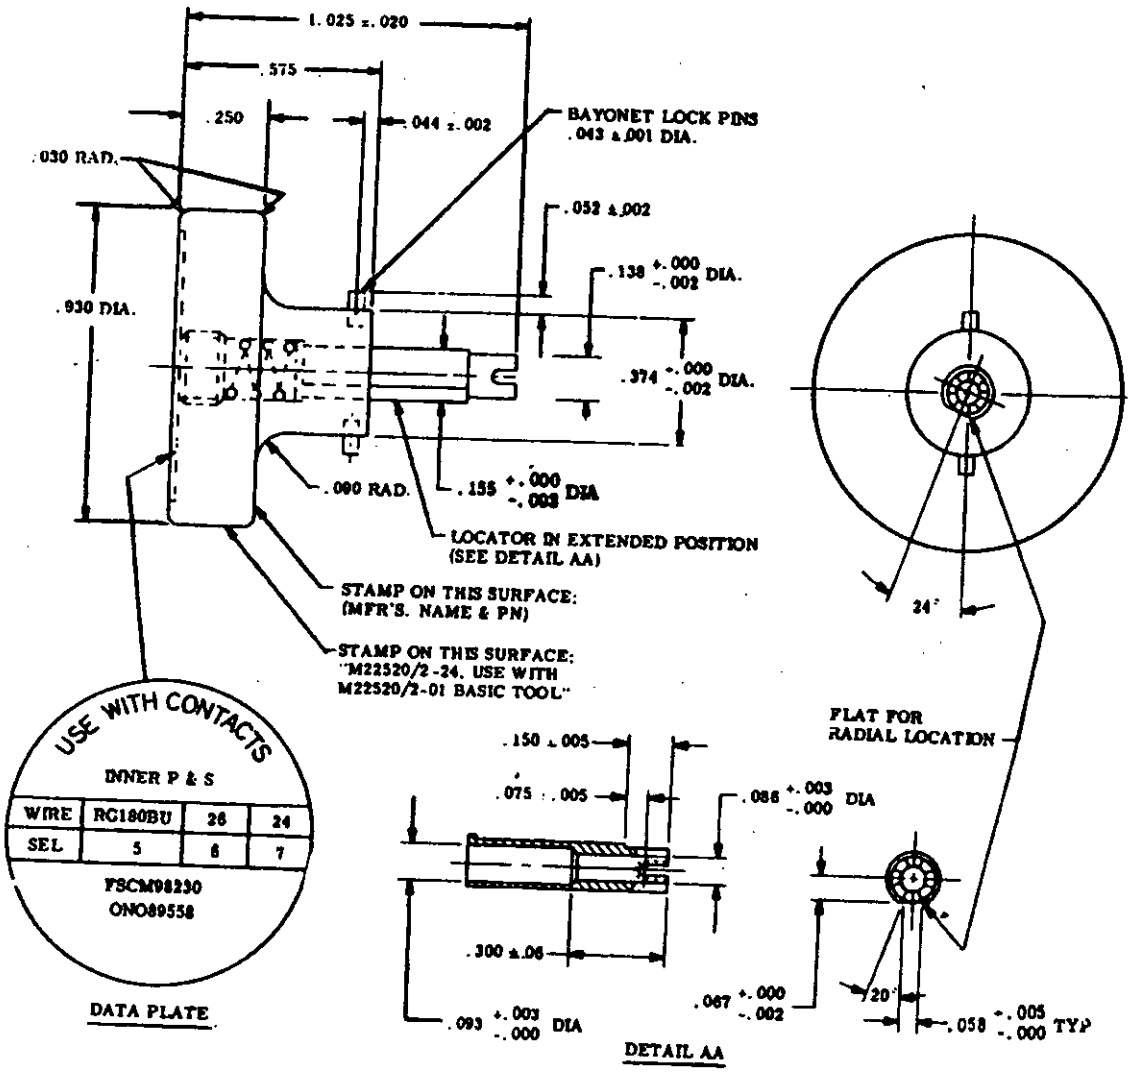


POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-24 | BLUE | ONO89558 (FSCM 98230) |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ±.010. ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763 CLASS 304. COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

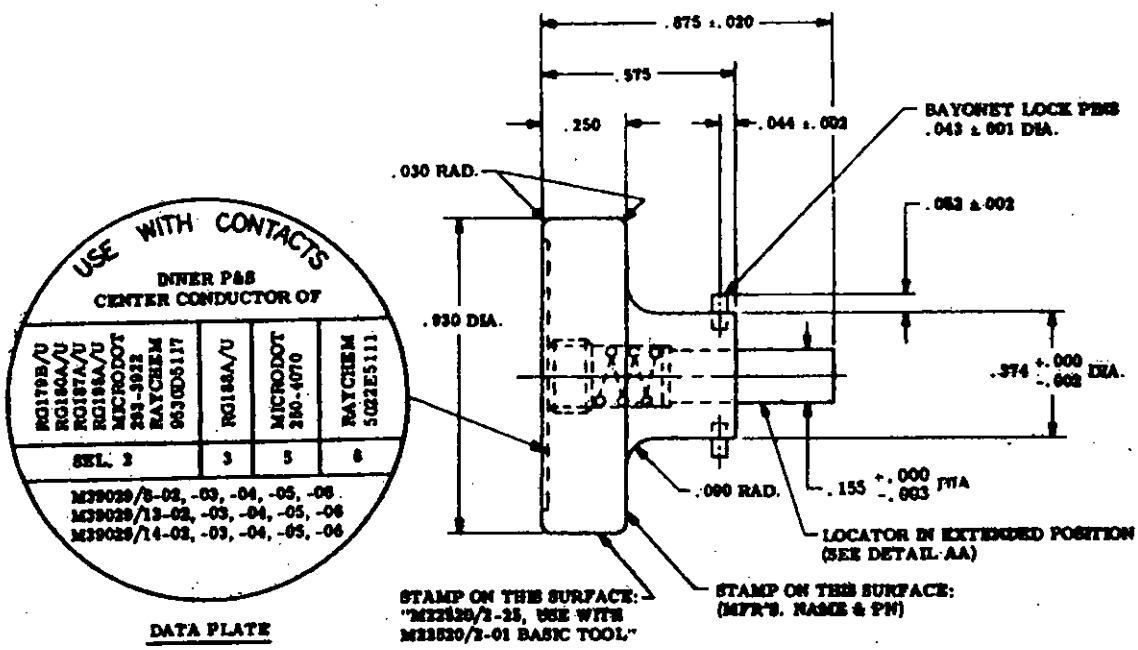

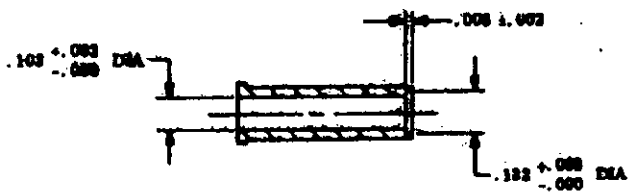
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-25 | BLUE | M39029/8-02, -03, -04, -05, -06<br>M39029/13-02, -03, -04, -05, -06<br>M39029/14-02, -03, -04, -05, -06 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

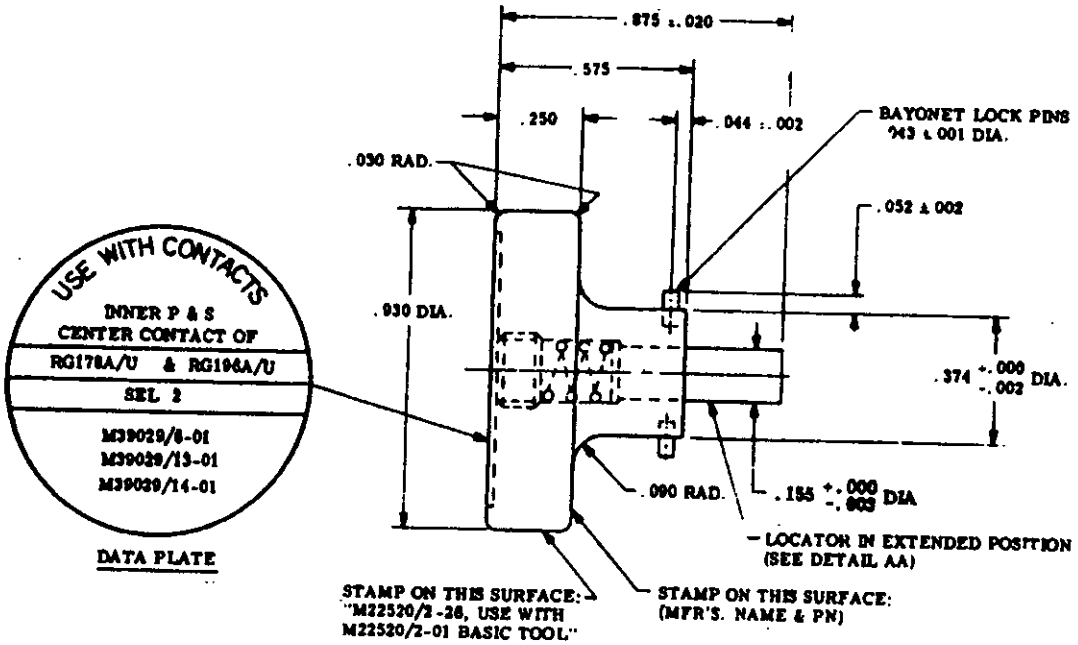

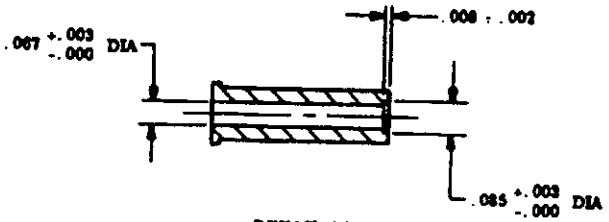
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-26 | BLUE | M39029/6-01.<br>M39029/13-01<br>M39029/14-01 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ± 1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304. COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

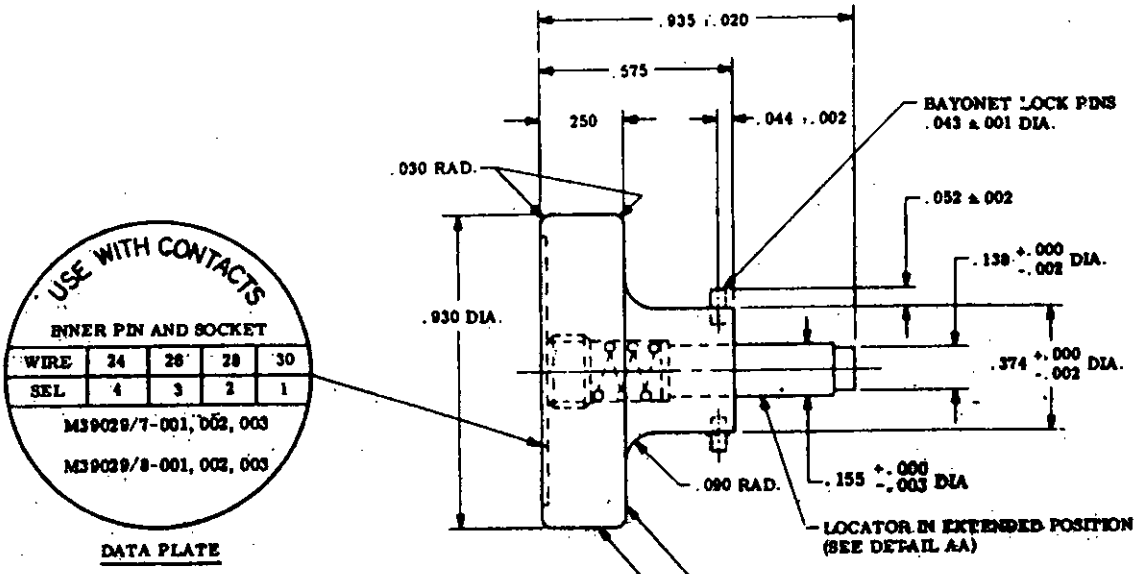

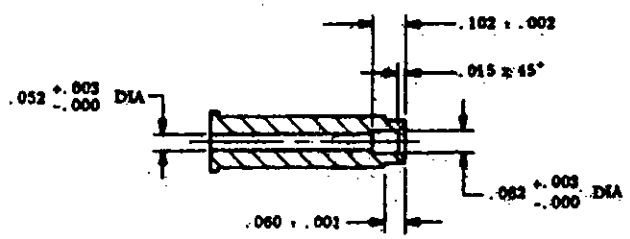
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-27 | BLUE | INNER PIN AND SOCKET<br>M39029/7-001, 002, 003<br>M39029/8-001, 002, 003 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 √ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

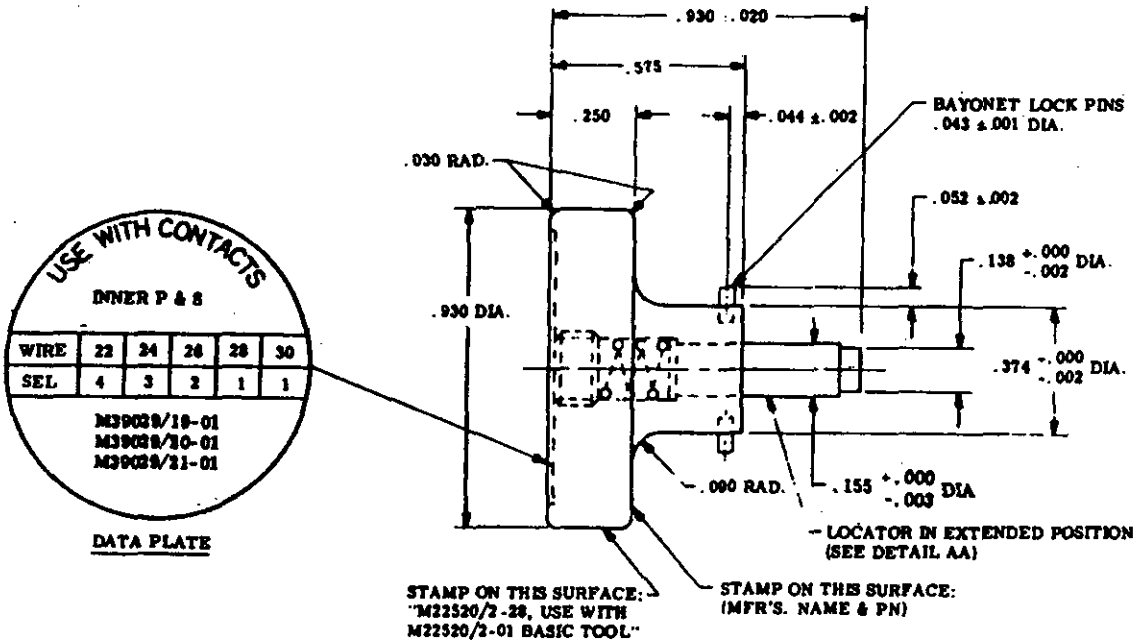

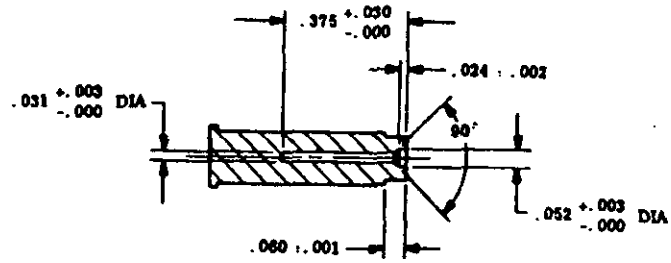
DETAIL AA

POSITIONER

| * PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-28 | BLUE | INNER PIN & SOCKET<br>M39029/19-01<br>M39029/20-01<br>M39029/21-01 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010. ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763. CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

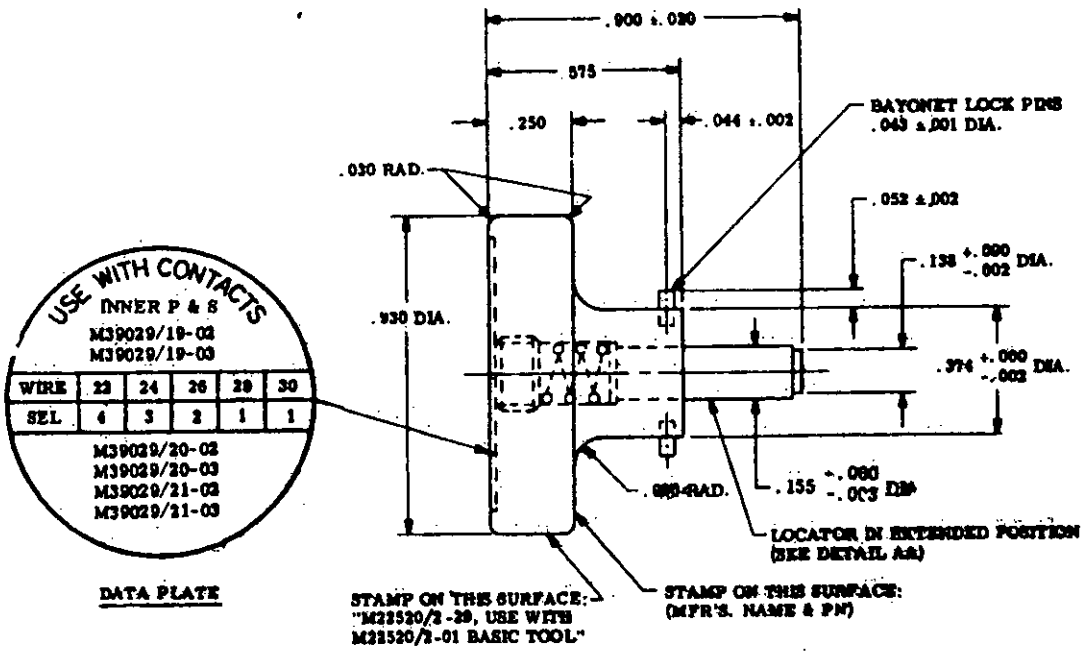

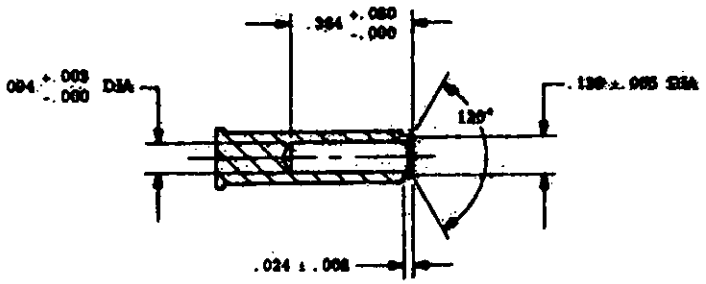
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-20 | BLUE | INNER PIN & SOCKET<br>M39029/19-02 M39029/20-02<br>M39029/19-03 M39029/20-03<br>M39029/20-02 M39029/21-02<br>M39029/20-03 M39029/21-03 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ASTM).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

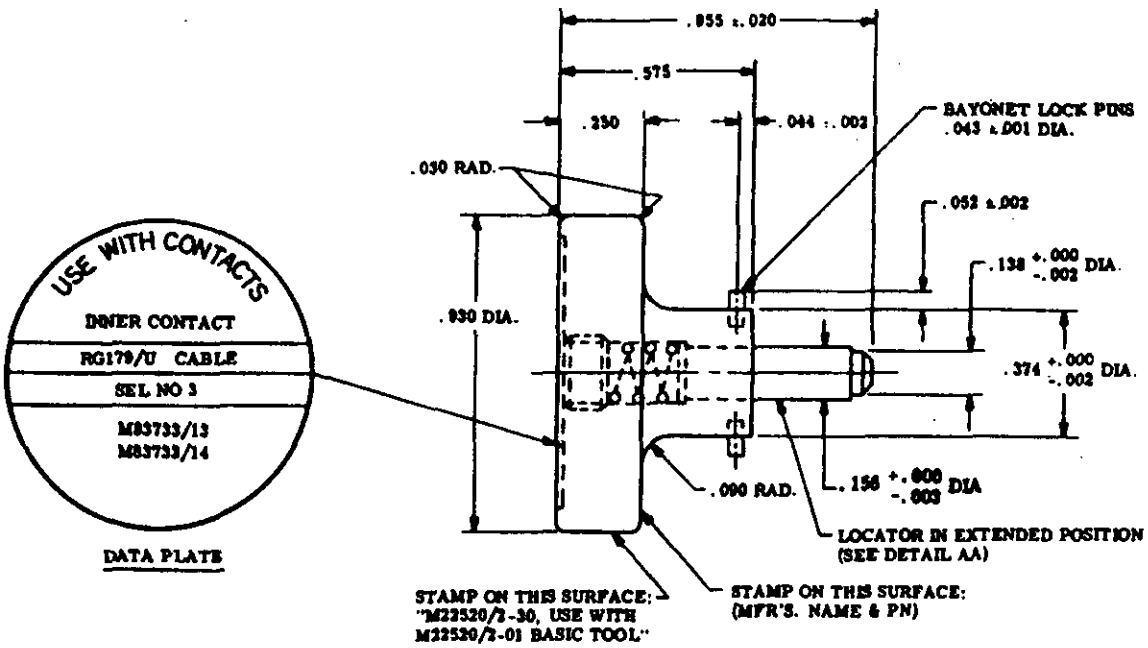

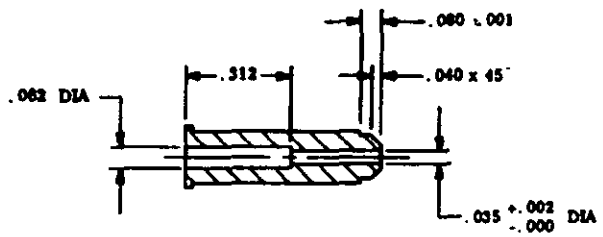
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-30 | BLUE | INNER CONTACT<br>M83733/13<br>M83733/14 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .091 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63√ ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

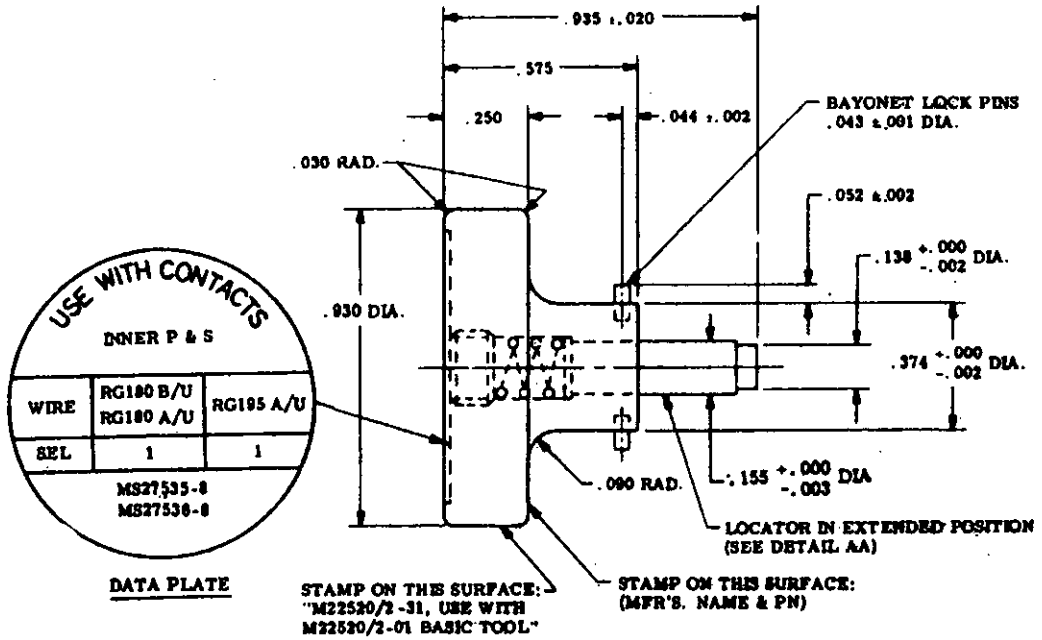

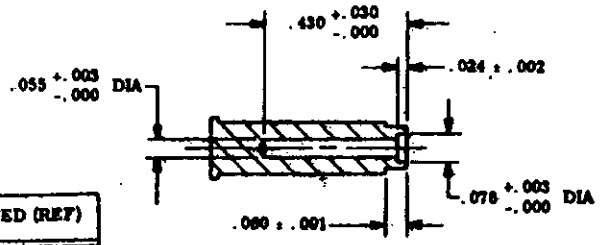
DETAIL AA

POSITIONER

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED (REF) |
|---|---|---|
| M22520/2-31 | BLUE | INNER PIN & SOCKET<br>M527535-8<br>M527536-8 |

NOTES:


1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46. 1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

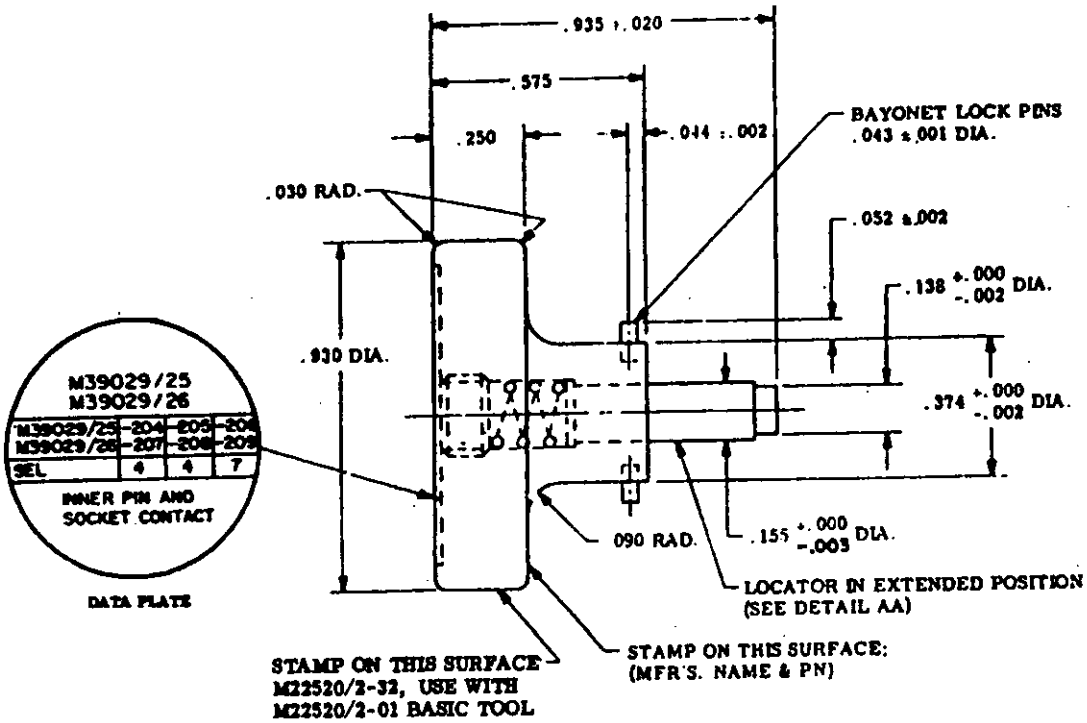

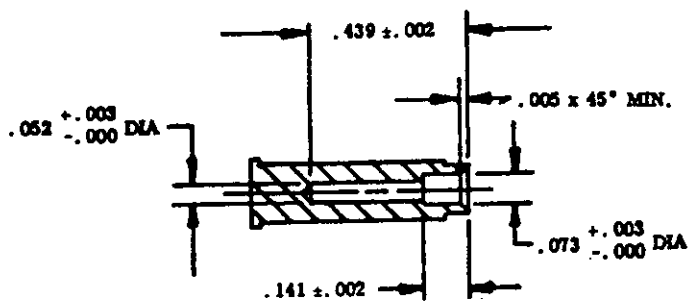
DETAIL AA

| PART NO. | BODY COLOR | CONTACTS ACCOMMODATED |
|---|---|---|
| M22520/2-32 | BLUE | INNER PIN & SOCKET<br>MIL-C-39029/25-204, -205, -206<br>MIL-C-39029/26-207, -208, -209 |

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. NO. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. NO. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - AS
USAF - 84

Review activities:
Army - MI, MU, AV, MC
Navy - SH, EC, OS
USAF - 12, 17, 80, 82
DESC - ES

User activities:
Army - ME, AT, GL
Navy - MC
Air Force - 70

Preparing activity:
Navy - AS

Agent:
DSA - ES
(Project No. 5120-0815)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

COMMANDER
DEFENSE ELECTRONICS SUPPLY CENTER
1507 WILMINGTON PIKE
DAYTON, OH 45444

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.