MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR WIRE BARREL SIZES 20 THROUGH 28

This amendment forms a part of Military Specification Sheet MIL-C-22520/2C, dated 19 March 1976, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Basic tool configuration, maximum handle opening dimension: Delete "4.500" and substitute "5.000".

PAGE 34

At top of page, add new outline configurations for part numbers M22520/2-33 through -36 as printed on pages 2 through 5 of this amendment.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AV
Navy - SH, EC, OS
Air Force - 11, 12, 17, 99
DLA - ES

User activities:
Army - ME, AT, GL
Navy - MC


Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5120-0932)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

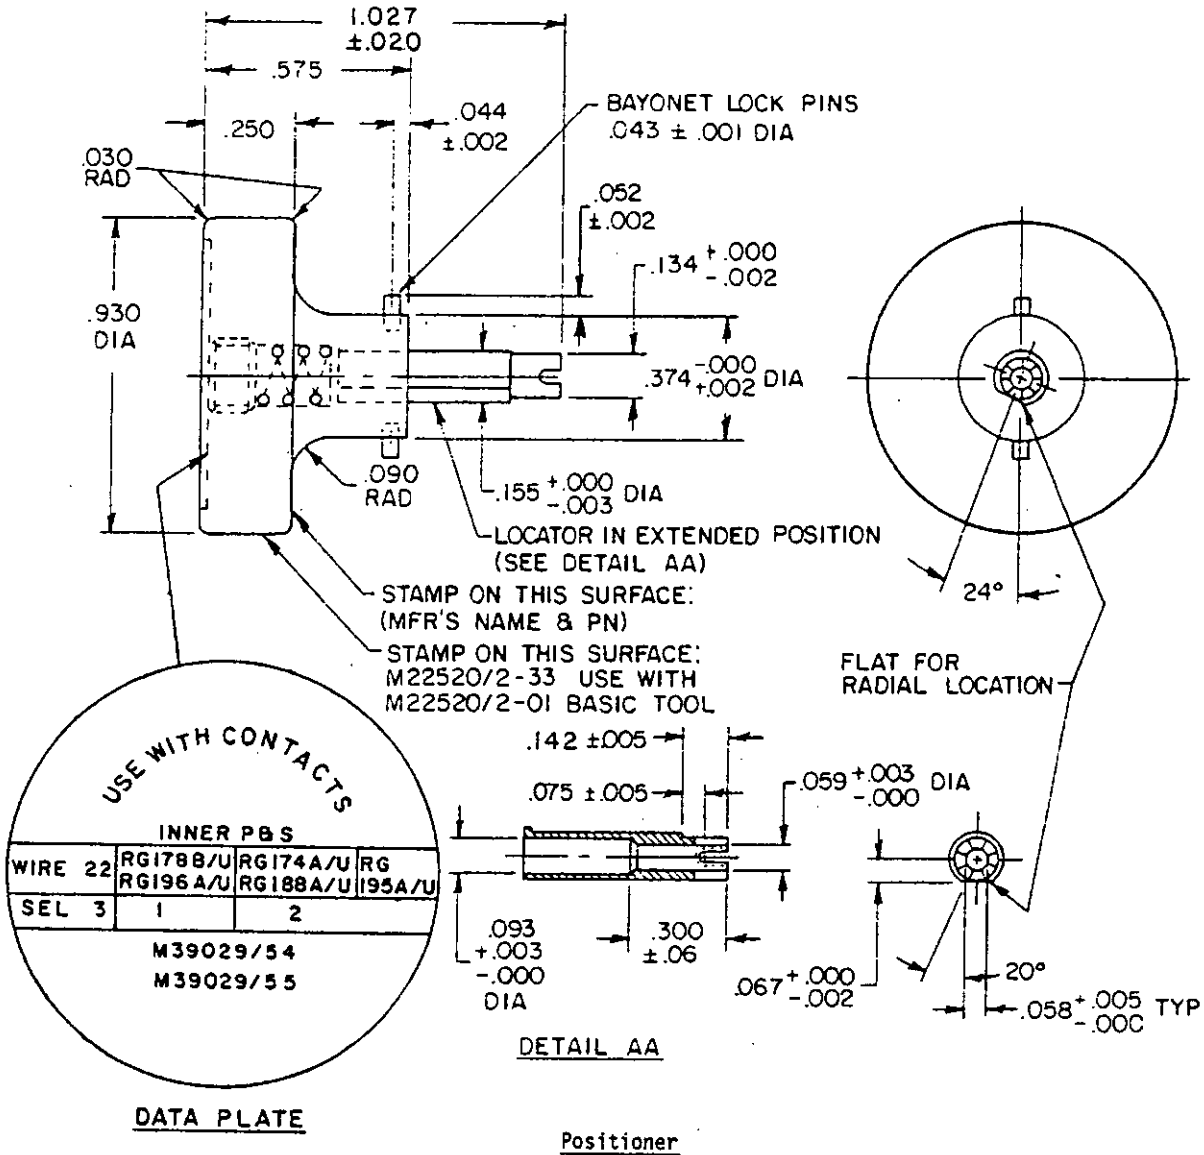


Positioner

Part no.	Body color	Contacts accommodated (ref) inner P & S
M22520/2-33	Blue	M39029/54 & M39029/55

NOTE: Unless otherwise specified, dimensions in inches. Tolerances: Decimals ±.010, angles ±1/2°.


REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

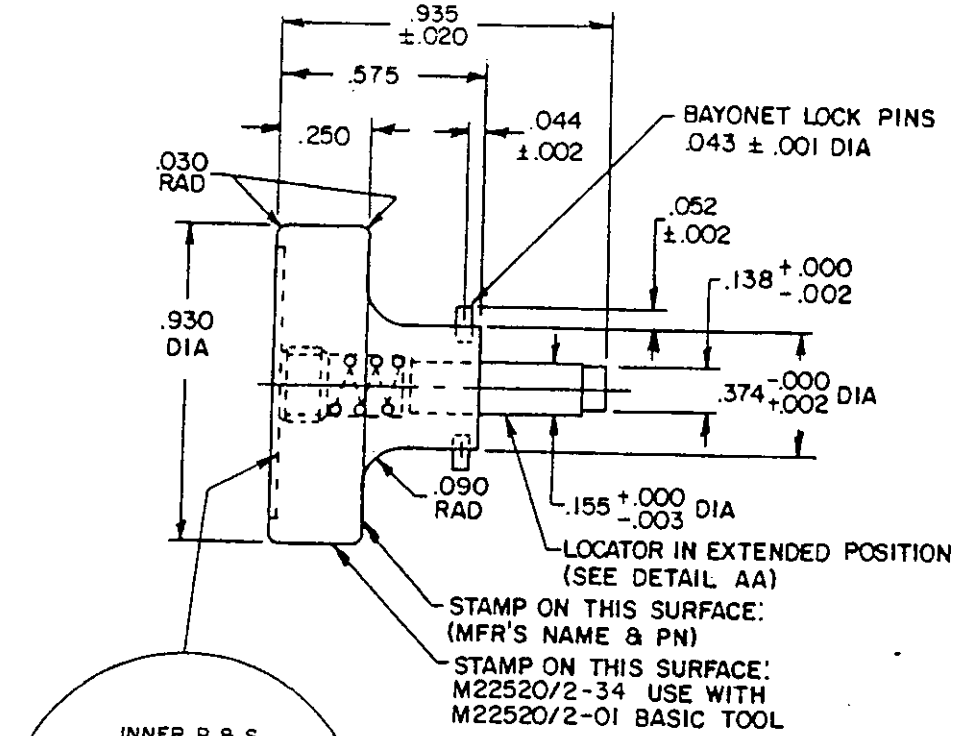

INNER P & S	
CABLE	SEL No.
RG179B/U, RG187A/U RG180B/U, RG195A/U	3
RG161/U, RG174A/U RG188A/U, RG316/U	4
M39029/27 M39029/28 M39029/75	

DATA PLATE

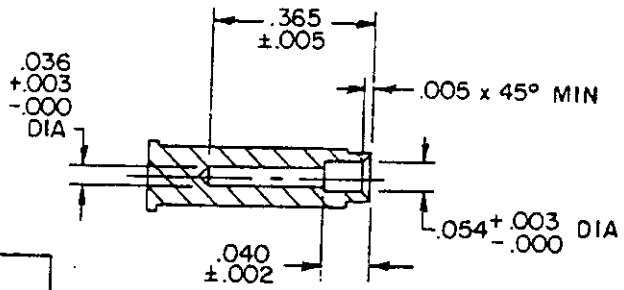


DETAIL AA

Part no.	Body color	Contacts accommodated
M22520/2-34	Blue	Inner pin & socket M39029/27 M29029/28 M29029/75

NOTE: Unless otherwise specified, dimensions in inches. Tolerances: Decimals ±.010, angles ±1/2°.


REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

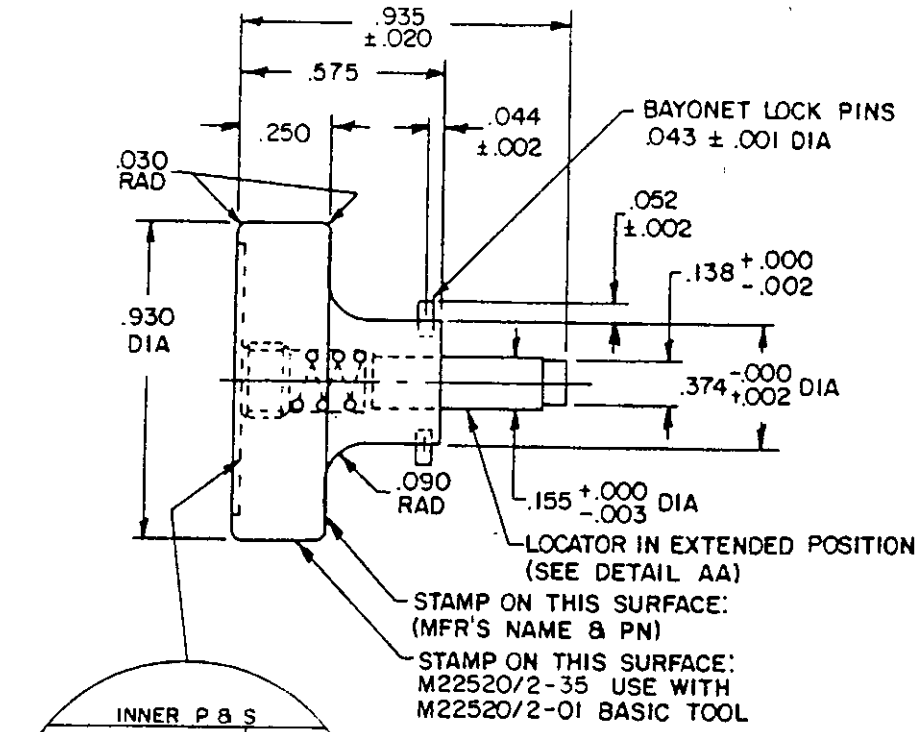

INNER P & S	
CABLE	SEL NO.
RG161/U, RG174A/U RG179B/U, RG187A/U RG188A/U, RG316/U RG178B/U, RG196A/U	3
M39029/76 M39029/77 M39029/78	

DATA PLATE

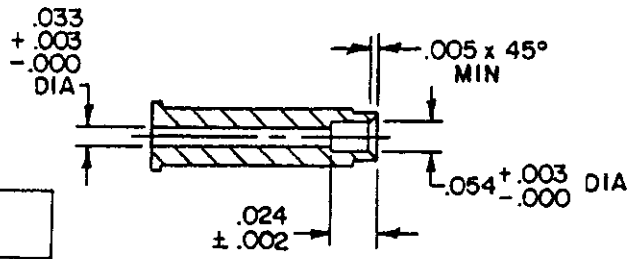


DETAIL AA


Part no.	Body color	Contacts accommodated
M22520/2-35	Blue	Inner pin & socket M39029/76 M39029/77 M39029/78

NOTE: Unless otherwise specified, dimensions in inches. Tolerances: Decimals ±.010, angles ±1/2°.


REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

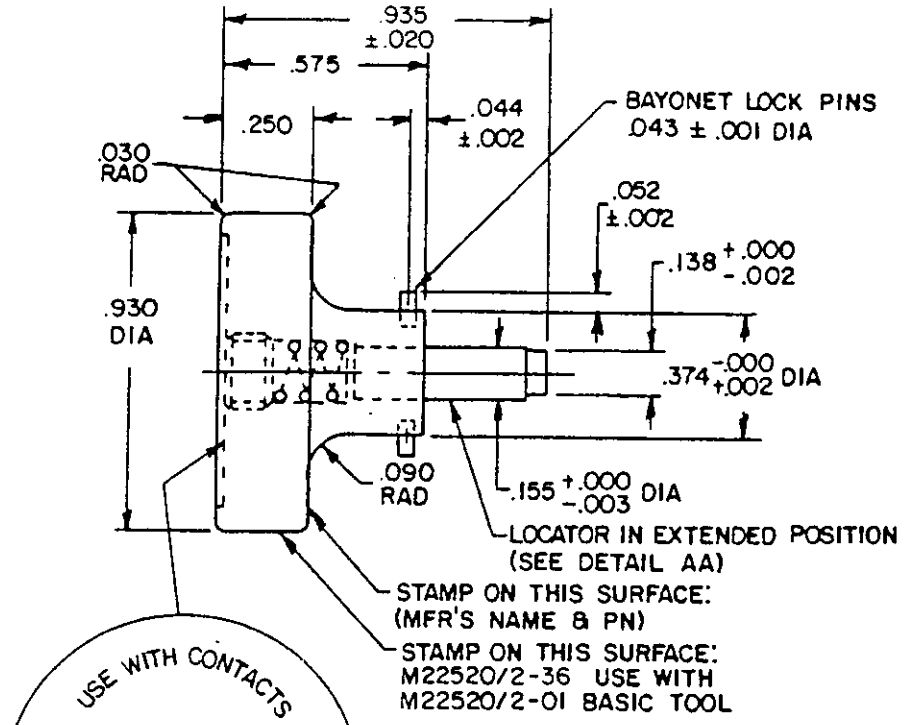

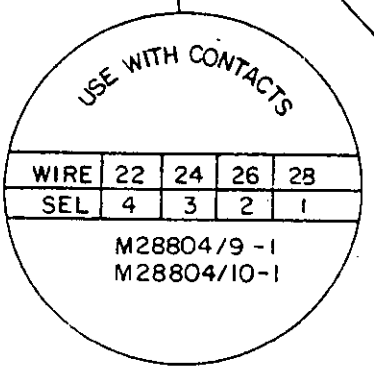

DATA PLATE

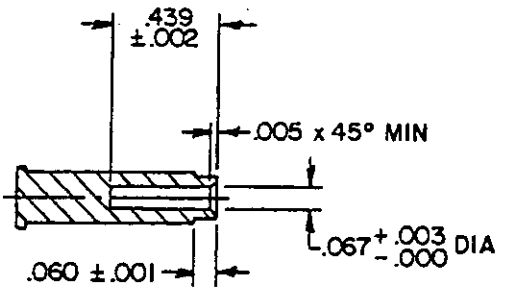

DETAIL AA

Positioner

Part no.	Body color	Contacts accommodated (ref)
M22520/2-36	Blue	M28804/9-1 M28804/10-1

NOTE: Unless otherwise specified, dimensions in inches. Tolerances: Decimals ±.010, angles ±1/2°.

REQUIREMENTS:
1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—704-023/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.