

MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION; IN-SERVICE INSPECTION GAGES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the gages described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

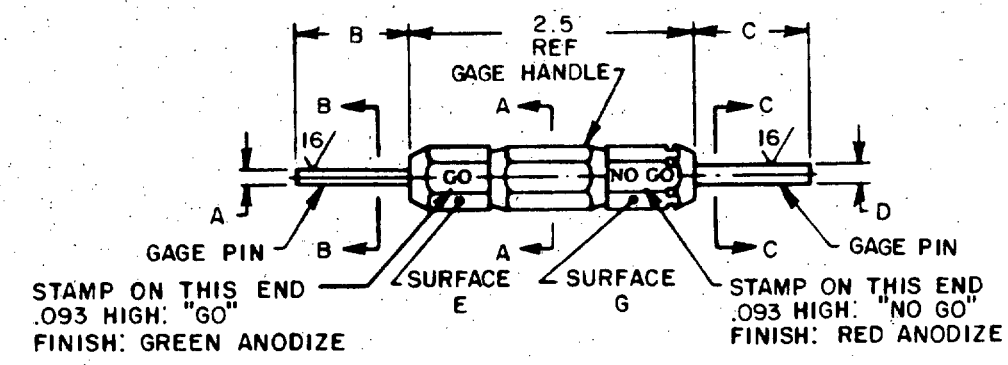

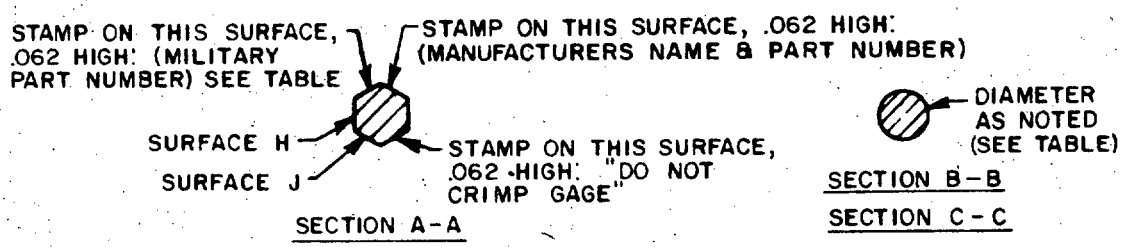

NOTES:
1. Unless otherwise specified, dimensions in inches, tolerances: Decimals ±.010.
2. Dimensions A and D apply after chrome flashing.

(D) denotes changes.

* U.S. GOVERNMENT PRINTING OFFICE 1981 — 703-023/887

Source: https://assist.dla.mil - Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

FSC 5220

Part no.	A ±.0001 Dia.	B ±.02	C ±.02	D ±.0001 Dia.	Stamping				Use for inspection of basic tools or dies
					Surface E	Surface G	Surface H	Surface J	
M22520/3-1	.0390	.50	.50	.0440	.0390	.0440	Use sel. 4 for M22520/1-01	Use sel. 8 for M22520/2-01	M22520/1-01 M22520/2-01
M22520/3-2	.0960			.1000	.0960	.1000	M22520/4-01 basic tool	---	M22520/4-01
M22520/3-3	.0410			.046	.0410	.0460	Use sel. 8 for M22520/7-01	---	M22520/7-01
M22520/3-4	.0640			.0670	.0640	.0670	Sel. 7 M22520 /19-01,/20-01	Sel. 1 M22520 /21-01,/22-01	M22520/19-01 M22520/20-01 M22520/21-01 M22520/22-01 indenters only
M22520/3-5	.0890			.0920	.0890	.0920	M22520/19-01 basic tool	Retainers only	M22520/19-01 retainers only
M22520/3-6	.0740			.0770	.0740	.0770	M22520/20-01 basic tool	Retainers only	M22520/20-01 retainers only
M22520/3-7	.1480			.1510	.1480	.1510	M22520/21-01 basic tool	Retainers only	M22520/21-01 retainers only
M22520/3-8	.1210			.1240	.1210	.1240	M22520/22-01 basic tool	Retainers only	M22520/22-01 retainers only
M22520/3-9	.1320			.140	.1320	.140	M22520/5-100 & /10-100 dies	Die size 12-10	M22520/5-100 1/ & /10-100 die cavity size 12-10
M22520/3-10	.0960			.1040	.0960	.1040	M22520/5-100 & /10-101 dies	Die size 26-14	M22520/5-100 1/ & /10-101 die cavity size 26-14
M22520/3-11	.0660			.0740	.0660	.0740	M22520/5-101 & /10-102 dies	Die size 26-24 splice	M22520/5-101 & /10-102 die cavity size 26-20
M22520/3-12	.0640			.0720	.0640	.0720	M22520/5-102 & /10-103 dies	Die size 16-12	M22520/5-102 & /10-103 die cavity size 16-12
M22520/3-13	.0430			.0510	.0430	.0510	M22520/5-103 & /10-104 dies	Die size 20-16	M22520/5-103 & /10-104 die cavity size 20-16
M22520/3-14	.0250			.0330	.0250	.0330	M22520/5-103 & /10-104 dies	Die size 26-20	M22520/5-103 & /10-104 die cavity size 26-20
(D) M22520/3-15	.1420			.1460	.1420	.1460	M22520/31-01 Basic tool	---	M22520/31-01
(D) M22520/3-16	.0099	↓	↓	.0151	.0099	.0151	M22520/32-01 Indenter	---	M22520/32-01

1/ See MIL-C-22520/5 for other dies using same gage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Gages shall be made in accordance with Department of Commerce Commercial Standard CS 8.
2. Material: Gage pins - Alloy tool steel per QQ-T-570, class optional. Harden to Rockwell C55-60.
   Gage handle - Aluminum alloy, No. 2W handle, per Department of Commerce Commercial Standard CS 8.
3. Finish: Gage pins; chrome flash, .0002 to .0003 thick, per QQ-C-320, class 2.
4. Unless otherwise specified, stamping shall be indented.
5. Each gage shall be furnished with a suitable container.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR, AV
Navy - SH, EC, OS
Air Force - 11, 12, 17, 99
DLA - ES

User activities:
Army - ME, AT, GL
Navy - MC

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5220-0181)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:45Z
Check the source to verify that this is the current version before use.