
MIL-C-22520/7B
19 March 1976
SUPERSEDING
MIL-C-22520/7A
19 July 1973

MILITARY SPECIFICATION SHEET

CRIMPING TOOLS, TERMINAL, HAND, WIRE TERMINATION FOR WIRE BARREL SIZES 16, 20 AND 22

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crimping tools described herein shall consist of this document and the latest issue of Specification MIL-C-22520.

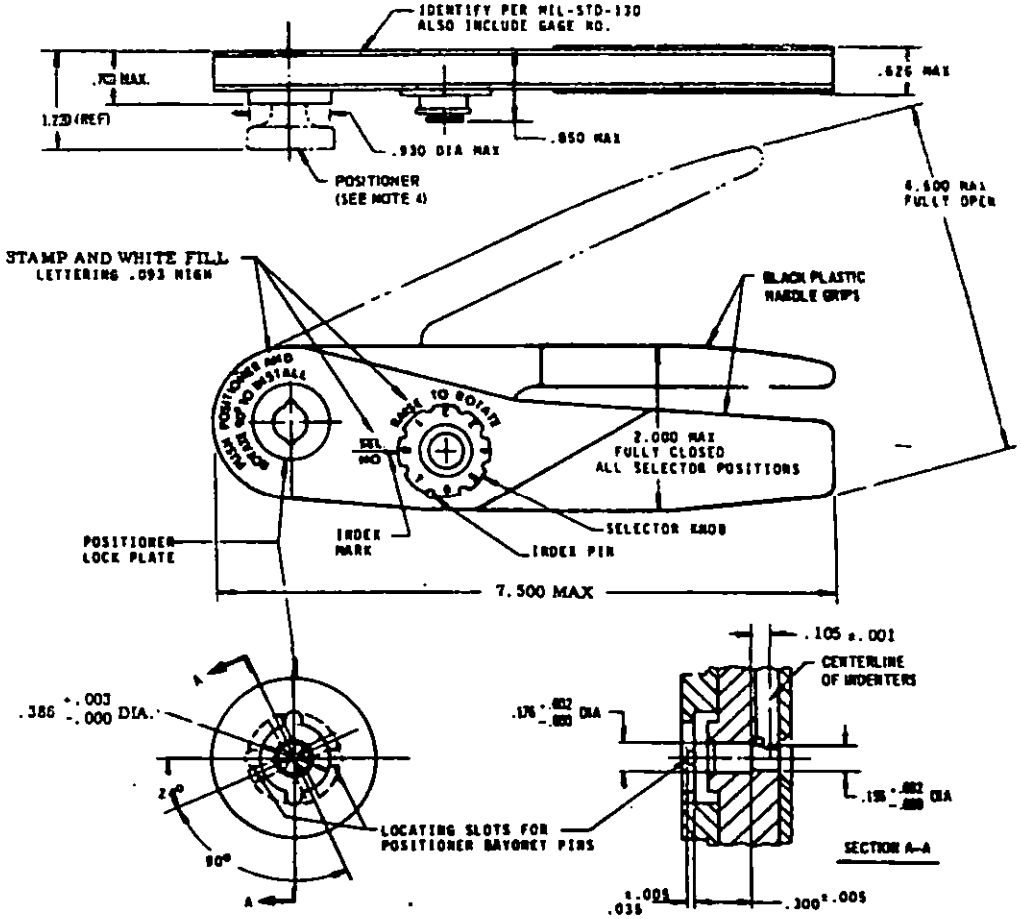

BASIC TOOL


PART NO.	BODY COLOR	FOR INSPECTION GAGING USE
M22520/7-01	GREEN	M22520/3-3

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°
2. OUTLINE CONFIGURATION OPTIONAL WITHIN MAXIMUM DIMENSIONS SHOWN.
3. SIZE 16 IS THE MAXIMUM WIRE SIZE ACCOMMODATED BY THIS TOOL.
4. FOR APPLICABLE POSITIONERS SEE PAGE 3 THROUGH 5.

REQUIREMENTS:
1. THE FORCE REQUIRED TO MAKE SATISFACTORY CRIMPS SHALL NOT EXCEED 65 POUNDS.
2. THE POSITIONER LOCK PLATE SHALL PROVIDE POSITIVE DETENT FOR BAYONET LOCK PINS.
3. THE WEIGHT OF THE BASIC TOOL SHALL NOT EXCEED 1.0 POUND.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

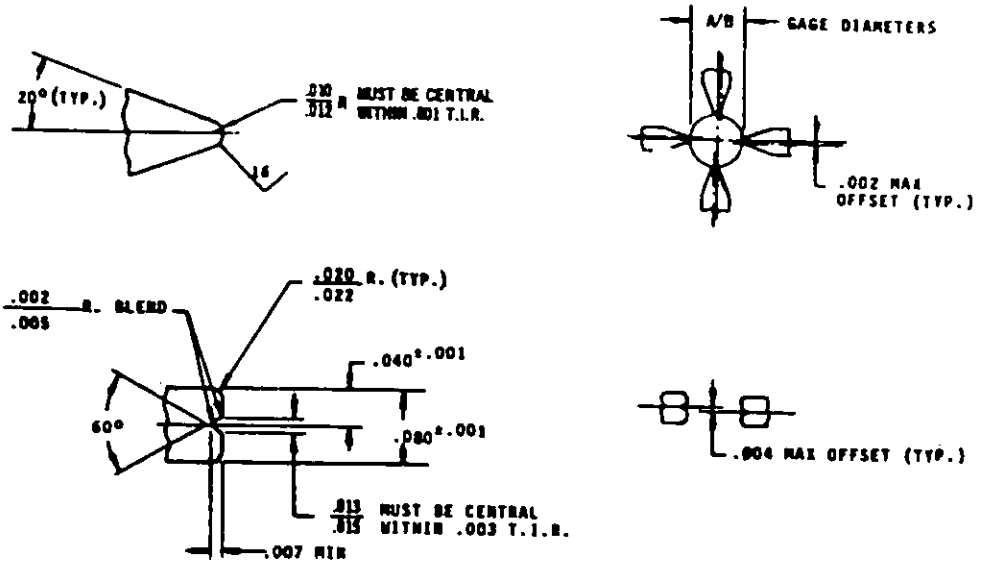

INDENTERS

GAGING LIMITS OF INDENTERS

SELECTOR NUMBER	GAGE - INSPECTION	
	A ±.0001 GO DIA.	B ±.0001 NO GO DIA
1	.0160	.0210
2	.0190	.0240
3	.0220	.0270
4	.0250	.0300
5	.0290	.0340
6	.0330	.0380
7	.0370	.0420
8	.0410	.0460


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. MATERIAL: OIL HARDENED TOOL STEEL, HARDEN TO ROCKWELL "C" 64-68.
2. SURFACE TEXTURE SHALL BE AS SHOWN IN ACCORDANCE WITH ASA-B46.1-1962 (ANSI).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

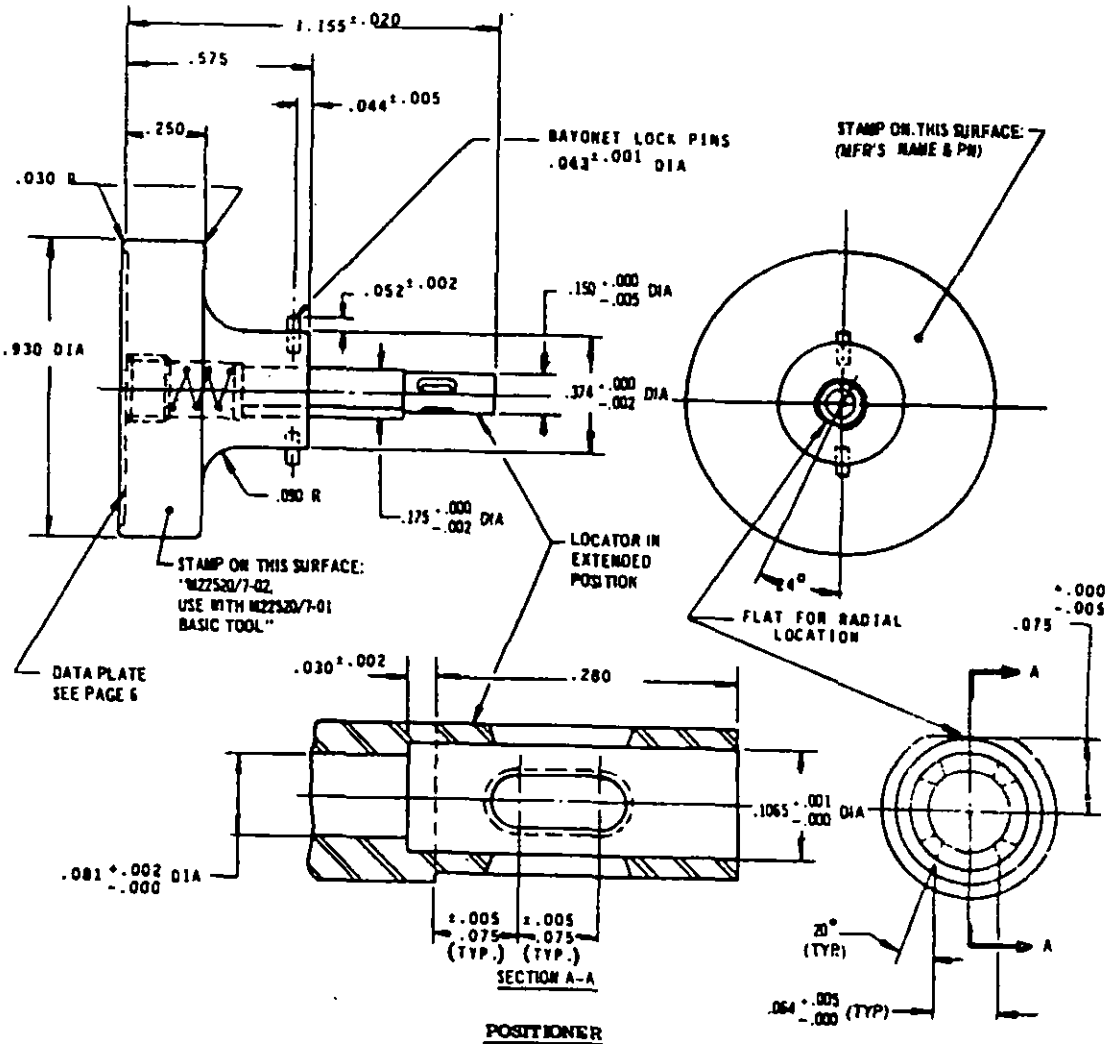

POSITIONER

PART NO.	BODY COLOR	CONTACTS ACCOMMODATED (REF.)		
M22520/7-02	GREEN	MS3192A20-20A	M39029/5-20-20	M39029/17-20-20
		MS3193A20-20A	M39029/11-20-20	M39029/18-20-20
		MS24254-20P	M39029/12-20-20	M83723/33B20
		MS24255-20S	M39029/15-20-20	M83723/34B20
		M39029/4-20-20	M39029/16-20-20	NAS1662-20
				NAS1663-20


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
6. THE WEIGHT OF THE POSITIONER SHALL BE .50 +.25 -.00 OUNCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

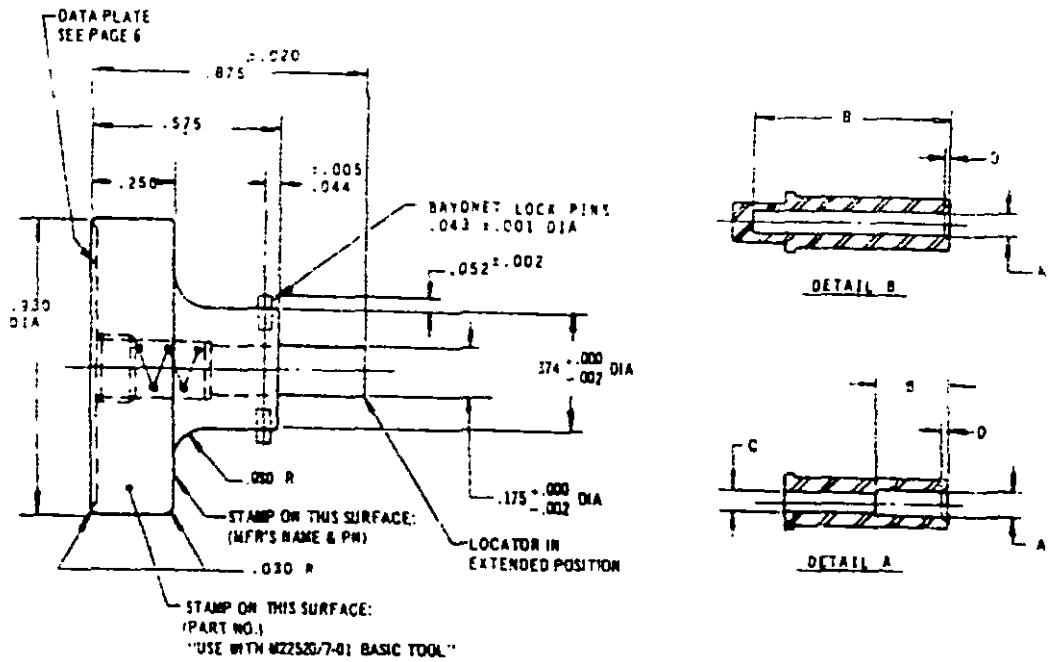

POSITIONERS

PART NO.	BODY COLOR	APPLICABLE LOCATOR DETAIL	A DIA +.003 -.000	B ±.002	C DIA +.003 -.000	D C'SINK	CONTACTS ACCOMMODATED (REF)
M22520/7-03	GREEN	A	.156	.100	.125	- -	M83192-16-16A M83193-16-16A MS24254-16P MS24255-16S M39029/4-16-16 M83723/29T16 M39029/5-16-16 M83723/30T16 M39029/11-16-16 M83723/33D16 M39029/12-16-16 M83723/34B16 NAS1662-16 NAS1663-16
M22520/7-04		A	.140	.070	.116	-	MS27490-16 MS27493-16 MS27491-16 MS27494-16 MS27492-16 M927695-16
M22520/7-05		B	.075	.075	- -	.015 x 45°	MS27490-22, -22M, -22D MS27695-22D
M22520/7-06		B	.073	.348	- -	.015 x 45°	MS27491-22, -22M, -22D, M24308/12-1 MS27492-22, -22M, -22D
M22520/7-07		A	.078	.096	.039	- -	MS27493-22, -22M, -22D, M24308/13-1 MS27494-22, -22M, -22D
M22520/7-08		A	.098	.065	.091	- -	MS27490-20 MS27493-20 MS27491-20 MS27494-20 MS27492-20 MS27695-20
M22520/7-11		B	.065	156	- -	.005 x 45	M39029/22-22-22 M39029/22-22-28
M22520/7-12		B	.096	.179	- -	.005 x 45°	M39029/22-20-20
M22520/7-13		B	.134	.179	- -	.005 x 45°	M39029/22-16-16


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
6. THE WEIGHT OF THE POSITIONER SHALL BE .50 +.25 -.00 OUNCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.

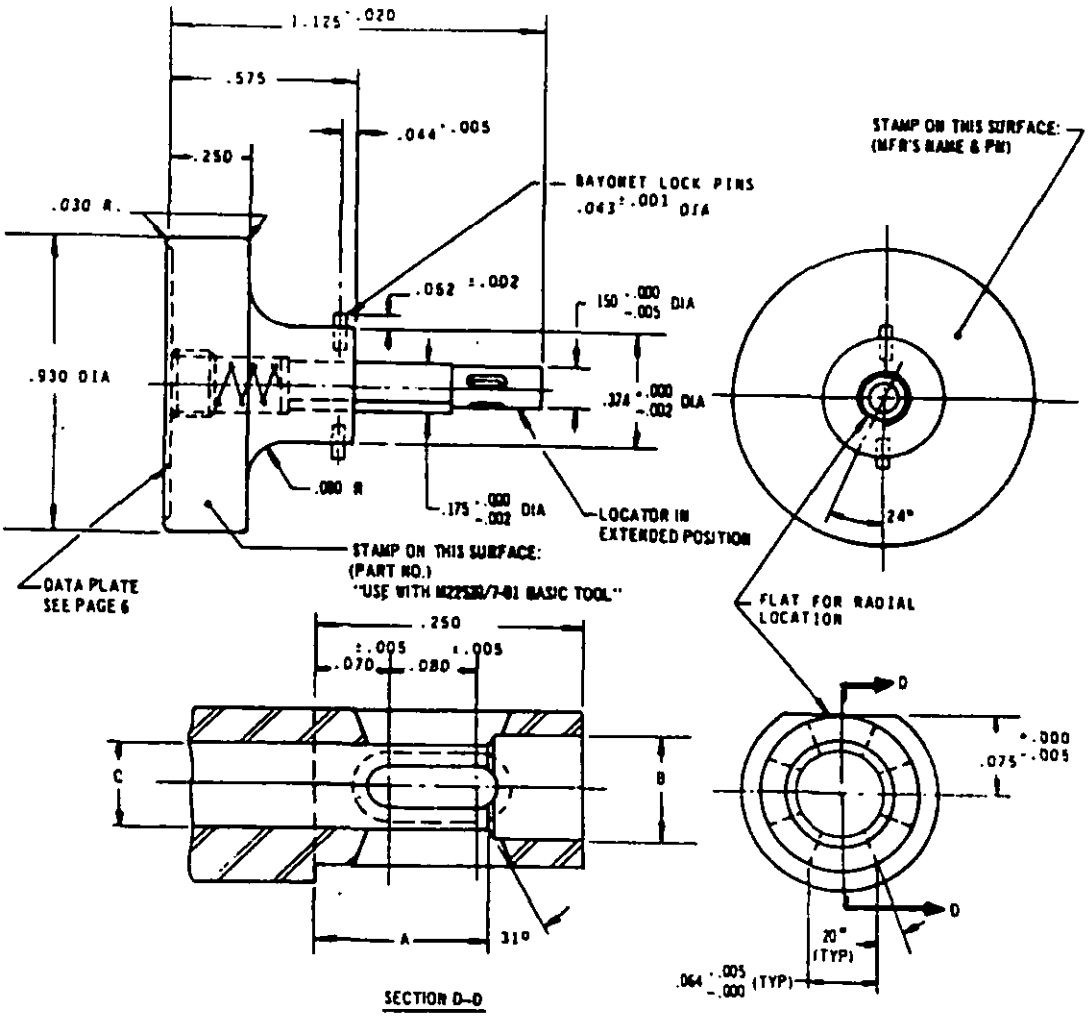

POSITIONERS

PART NO.	BODY COLOR	A± .002	B +.002 -.000	C +.002 -.000	CONTACTS ACCOMMODATED (REF)
M22520/7-09	GREEN	.160	.104	.082	MS3343-20-20 (A & B) MS90460-20-20 (A & B) MS90461-20-20 (A & B)
M22520/7-10		.165	.134	.114	MS3343-16-16 (A & B) MS90460-16-16 (A & B) MS90461-16-16 (A & B)


NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.


REQUIREMENTS:

1. POSITIONER BODY SHALL BE MADE OF ALUMINUM PER FED. SPEC. QQ-A-225/6.
2. POSITIONER LOCATOR SHALL BE MADE OF STAINLESS STEEL PER FED. SPEC. QQ-S-763, CLASS 304, COND. A.
3. POSITIONER LOCATOR SHALL BE SPRING LOADED SO AS TO DEPRESS .031 WITH A FORCE OF 2 ±1 POUNDS.
4. BREAK ALL SHARP EDGES .005 R. MAX.
5. SURFACE TEXTURE SHALL BE 63 ALL OVER IN ACCORDANCE WITH ASA B46.1-1962 (ANSI).
6. THE WEIGHT OF THE POSITIONER SHALL BE .50 +.25 -.00 OUNCE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.




FOR M22520/7-02 POSITIONER




FOR M22520/7-03 POSITIONER




FOR M22520/7-04 POSITIONER




FOR M22520/7-05 POSITIONER




FOR M22520/7-06 POSITIONER




FOR M22520/7-07 POSITIONER




FOR M22520/7-08 POSITIONER




FOR M22520/7-09 POSITIONER




FOR M22520/7-10 POSITIONER



FOR M22520/7-11 POSITIONER



FOR M22520/7-12 POSITIONER



FOR M22520/7-13 POSITIONER

DATA PLATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:46Z
Check the source to verify that this is the current version before use.