INCH-POUND

MIL-S-22499/1


1 September 1989

MILITARY SPECIFICATION SHEET

SHIM STOCK, LAMINATED, ALUMINUM ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-22499.

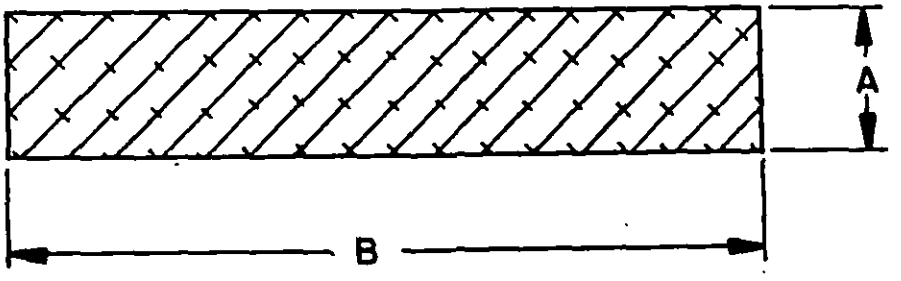

NOTES:

1. All dimensions are in inches.

FIGURE 1. BAR, METAL, FLAT

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:42Z
Check the source to verify that this is the current version before use.

Requirements

1. Material: Aluminum alloy as specified in procurement document.


2. Types: 1. - All laminations.
2. - One-half solid stock.
3. - Three-fourths solid stock.

Classes: 1. - .002 inch laminations.
2. - .003 inch laminations.

3. Marking: Aluminum and aluminum alloys shall be marked in accordance with FED-STD-184 with the exception that a part number from this military specification slash sheet shall be included as part of the identification marking.

4. Part number: The part number consists of the letter "M", the basic number of this specification sheet and a dash number from Table I.

Example: M22499/1-001



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:42Z
Check the source to verify that this is the current version before use.

TABLE I

DASH NO.	A THICKNESS	B WIDTH	LENGTH FEET	TYPE	CLASS
001	0.006	20.000	4.000	1	1
003	0.006	20.000	4.000	1	1
005	0.015	6.000	3.000	1	2
007	0.016	24.000	4.000	1	2
009	0.021	24.000	4.000	1	2
011	0.024	8.000	2.000	1	1
013	0.030	10.000	1.667	1	1
015	0.032	24.000	4.000	1	1
017	0.032	24.000	4.000	1	2
019	0.032	24.000	4.000	2	2
021	0.033	24.000	4.000	1	2
023	0.040	24.000	4.000	1	2
025	0.048	24.000	4.000	1	2
027	0.048	24.000	4.000	2	2
029	0.048	36.000	8.000	2	2
031	0.062	10.000	1.667	2	2
033	0.062	24.000	4.000	1	1
035	0.065	24.000	4.000	2	2
037	0.066	24.000	4.000	1	2
039	0.092	24.000	4.000	2	2
041	0.093	10.000	1.667	3	2
043	0.093	12.000	4.000	1	2

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:42Z
Check the source to verify that this is the current version before use.

TABLE I-Continued

DASH NO.	A THICKNESS	B WIDTH	LENGTH FEET	TYPE	CLASS
045	0.093	24.000	4.000	2	2
047	0.094	24.000	4.000	1	1
049	0.094	24.000	4.000	1	2
051	0.100	24.000	4.000	1	2
053	0.120	10.000	1.667	3	2
055	0.120	24.000	4.000	2	2
057	0.125	24.000	4.000	1	1
059	0.125	24.000	4.000	1	2
061	0.132	24.000	4.000	2	2
063	0.150	24.000	4.000	1	2
065	0.186	36.000	6.000	1	2
067	0.187	24.000	4.000	1	2
069	0.190	24.000	4.000	2	2
071	0.190	24.000	4.000	1	2
073	0.200	48.000	8.000	2	2
075	0.250	20.000	4.000	1	2
077	0.250	24.000	4.000	1	2
079	0.250	24.000	4.000	1	1

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MR
Navy - AS

Review Activities:
Army - AR, EA, MI, MR
Navy - AS
DLA - CS, IS

User Activities:
Army - AT, ME
Navy - MC

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 9535-0489)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:42Z
Check the source to verify that this is the current version before use.