INCH-POUND

MIL-DTL-85052/7A
29 December 2016
SUPERSEDING
MIL-DTL-85052/7
1 December 2015

DETAIL SPECIFICATION SHEET

CLAMP, LOOP, ALUMINUM 2024-T42, 212 °F, CHLOROPRENE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-85052.

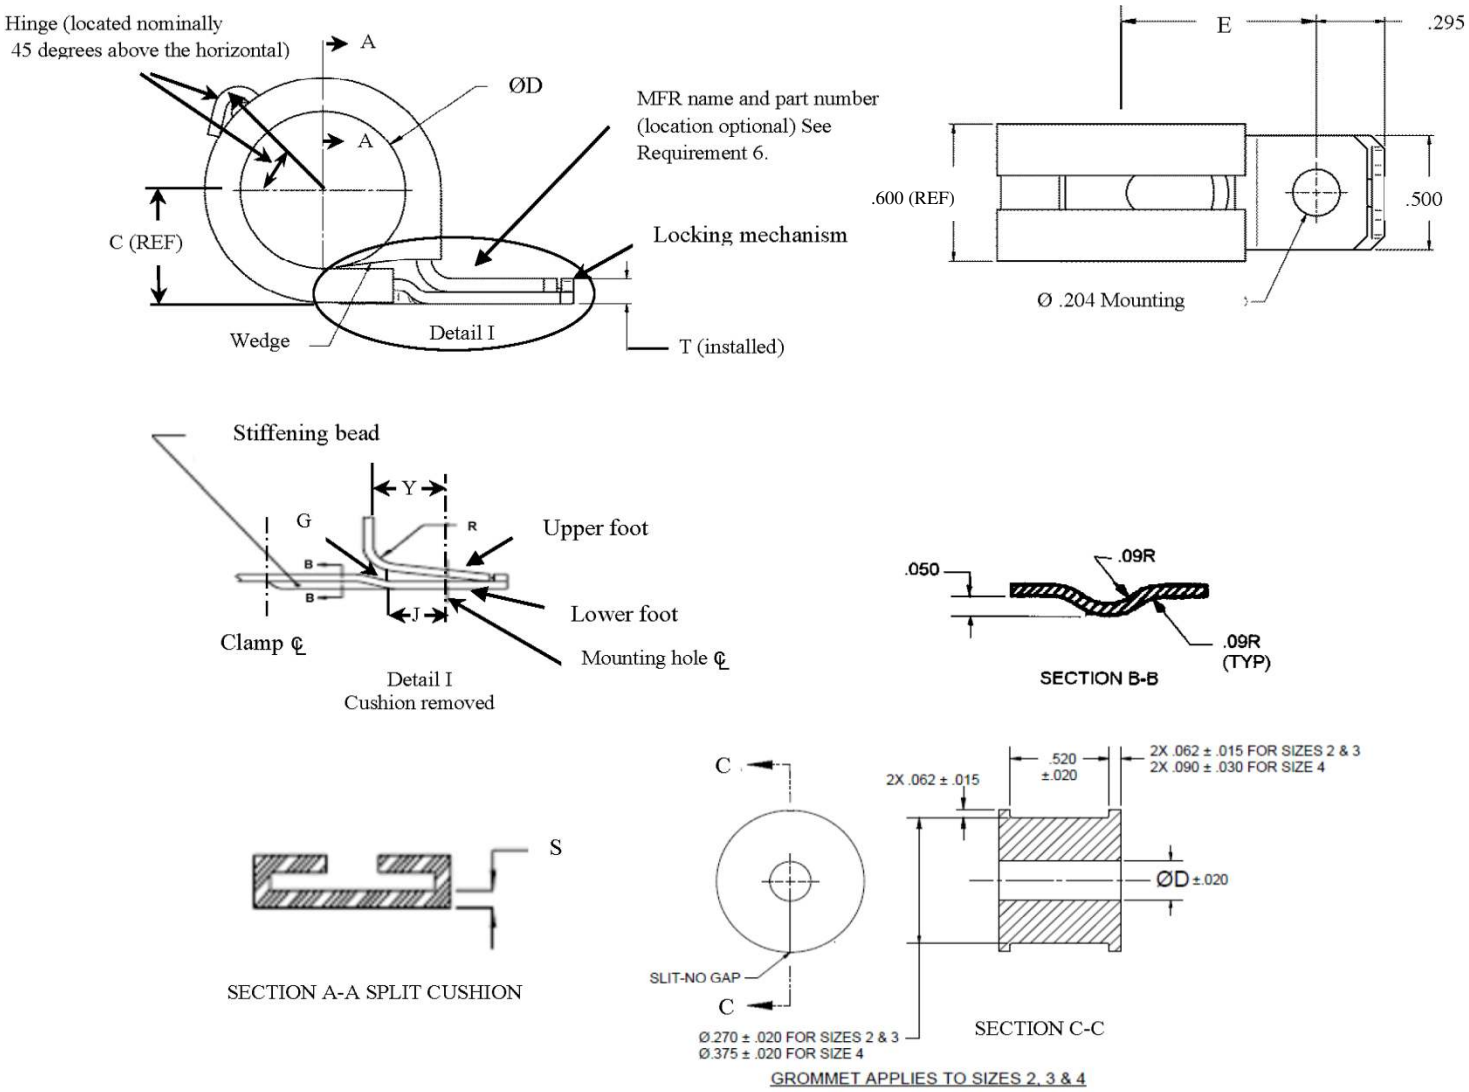


FIGURE 1. Clamp design and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

TABLE I. Clamp dimensions.

Dash No.	Harness Nominal O.D. 5/	C REF	ØD 1/ 5/	E 2/ 6/ ± .032	G	J 4/ REF	R ± .010	S ± .010	T ± .010	Y 4/ REF
02	1/8	.218	.125	.548		.301		N/A 3/		.363
03	3/16	.217	.188	.548						
04	1/4	.270	.250	.579		.279				.341
05	5/16	.288	.313	.610		.292	.062		.082	.354
06	3/8	.320	.375	.592		.243				.305
07	7/16	.351	.438	.623						
08	1/2	.382	.500	.654						
09	9/16	.431	.563	.752		.250	.109	.050	.112	.359
10	5/8	.463	.625	.783						
11	11/16	.494	.688	.814						
12	3/4	.525	.750	.845						
13	13/16	.556	.813	.877						
14	7/8	.588	.875	.908						
15	15/16	.619	.938	.939						
16	1	.650	1.000	.970	.045 ± .005					
17	1 1/16	.681	1.063	1.002						
18	1 1/8	.733	1.125	1.062		.226	.125	.070	.129	.351
19	1 3/16	.764	1.188	1.093						
20	1 1/4	.795	1.250	1.124						
21	1 5/16	.826	1.313	1.156						
22	1 3/8	.858	1.375	1.187						
23	1 7/16	.889	1.438	1.218						
24	1 1/2	.920	1.500	1.249						
25	1 9/16	.951	1.563	1.281						
26	1 5/8	.983	1.625	1.312						
27	1 11/16	1.014	1.688	1.344						
28	1 3/4	1.045	1.750	1.374						
29	1 13/16	1.076	1.813	1.406						
30	1 7/8	1.108	1.875	1.437						
31	1 15/16	1.139	1.938	1.468	.070 ± .015					
32	2	1.170	2.000	1.499						
33	2 1/16	1.201	2.062	1.531						
34	2 1/8	1.233	2.125	1.562						
35	2 3/16	1.264	2.188	1.594						
36	2 1/4	1.295	2.250	1.624						
37	2 5/16	1.326	2.312	1.655						
38	2 3/8	1.358	2.375	1.687						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

TABLE I. Clamp dimensions – Continued.

Dash No.	Harness Nominal O.D. 5/	C REF	ØD 1/ 5/	E 2/ 6/ ± .032	G	J 4/ REF	R ± .010	S ± .010	T ± .010	Y 4/ REF
39	2 7/16	1.389	2.438	1.719	.070 ± .015	.226	.125	.070	.129	.351
40	2 1/2	1.420	2.500	1.752						
41	2 9/16	1.451	2.563	1.781						
42	2 5/8	1.483	2.625	1.812						
43	2 11/16	1.514	2.688	1.844						
44	2 3/4	1.545	2.750	1.875						
45	2 13/16	1.576	2.812	1.906						
46	2 7/8	1.608	2.875	1.937						
48	3	1.670	3.000	2.000						
50	3 1/8	1.733	3.125	2.062						
52	3 1/4	1.795	3.250	2.125						
54	3 3/8	1.858	3.375	2.187						
56	3 1/2	1.920	3.500	2.250						
58	3 3/4	1.983	3.625	2.312						
64	4	2.170	4.000	2.500						
66	4 1/8	2.233	4.125	2.562						

1/ Diameter "ØD" measured at a 45 degree angle from vertical as shown on figure 1.

2/ Dimension "E" is measured with the clamp installed on a mandrel of "ØD" diameter with a manual tolerance of ±.001.

3/ Clamp sizes 2, 3, and 4 use the grommet shown on figure 1 in lieu of the split cushion.

4/ Reference dimensions "Y" and" J" are provided to gain maximum support for the lower foot (see figure 1) by closely fitting the upper foot (see figure 1) bend radius to the stiffening bead blend radius when closed against each other.

5/ Harness " O.D." and "ØD" are the nominal diameters for which a clamp size is intended for use.

6/ Dimension "E" shall be measured with the clamp installed on a mandrel of "ØD" diameter ±.001, and a spacer with thickness in accordance with dimension "G" between the upper and lower foot as shown on figure 1.

REQUIREMENTS:

1. Unless otherwise specified, dimensions are in inches, tolerances ±.03 for two decimals and ±.010 for three decimals.

2. Wedge (see figure 1) shall be required on sizes 5 through 49. The wedge shall be molded as an integral part of the cushion and contoured to fit harness nominal "O.D." and "ØD" diameter (see Table I).

3. Stiffening bead (see figure 1) shall be required on sizes 2 through 66. All radii on the stiffening bead shall be smooth and blended. No sharp tool marks are allowed.


4. The wedge shall touch the cushion on the lower foot (see figure 1) of clamp when clamp is installed on a mandrel of "ØD" diameter (see Table I) ±.001 tolerance, without spacers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

5. Remove all burrs, scales, sharp edges, and break all sharp corners on clamp band. Mold marks and flash are permissible on cushions.

6. Identification shall include part number and manufacturer's name or trademark. Trademark shall be registered in SAE AIR1351. Do not mark in radius. Part number and manufacturer's name or trademark shall be stamped on the clamp loop. Identification may be located on the upper or lower foot when weight reducing hole does not permit marking location shown on figure 1. Part number may be split to accommodate available space.

Part or Identifying Number (PIN) example:

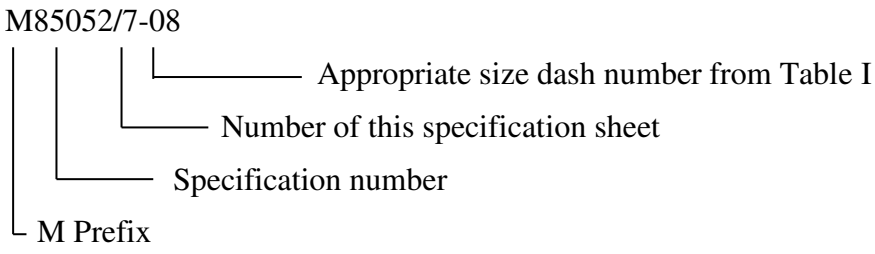

7. Materials.

a. Metal band.

2024-0 aluminum alloy per SAE AMS-QQ-A-250/5.

Heat treatment - SAE AMS2770 condition T42

Finish - MIL-DTL-5541 Class 1A Cushion.

b. Cushion. Chloroprene – Cushion requirements shall be in accordance with SAE AMS3209. Extruded material shall be identified by a blue stripe extending lengthwise along both edges of the cushion. The stripe width shall be equal to the width of the cushion edge. Molded material shall be identified by a blue area at the wedge end. The blue area shall be on one or both edges of the cushion and may include the wedge and shall have a minimum length of 0.125 inch to a maximum of 0.750 inch. The blue area shall be located within an area not to exceed 1.50 inch or 50 percent of the total cushion length, whichever is smaller, when measured from the wedge end. In no case shall the blue area extend beyond 50 percent of the cushion length. The material used for the blue identifier shall be the same as the cushion material except color blue. Inking or other surface coloring methods shall not be used.

8. Clamp loop shall include a hinge (see figure 1) to reduce the spring back of the metal band. The spring back force may vary depending on the cushion material.

9. Diametral retention is not required.

EXAMINATION AND TESTS:

1. Locking mechanism.

a. Loop alignment test. The locking mechanism (see figure 1) shall close and lock when mounted without mounting hardware over a mandrel with a diameter "D" within ±.001 inch specified in Table I. The mounting holes shall be in alignment within 0.010 inch. The band

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

width straightness (parallel to the bar axis) shall be within 0.010 inch except in the area of the stiffening bead.

b. Full locked verification (without mandrel). Position the cushion in accordance with the cushion alignment test. When the clamp is in a fully locked position using mounting hardware on a flat plate, there shall be no gap between the flat portion of the band and the mounting surface. There shall be no visible gap between metal bands extending from the locking area to the far side of the fastener. A gap beyond the radius not extending to the fastener shall be limited to 0.020 inch maximum. Cushion pinching which causes a gap at the radius is unacceptable. The cushion wedge shall make firm rubber to rubber contact sufficient to prevent harness/wire from contacting metal bands.

2. Vibration.

The vibration test shall be conducted using the vibration acceleration limits and break points defined in Table III. Simultaneous testing of multiple size clamps and multiple samples is permissible. The configuration of using metal mandrels, mounting method and clamp spacing shown (see figure 3) was done to facilitate multiple configurations testing at the same time. It was also used as a method to establish a standard for testing manufacturers clamp capability within a defined parameter. This may or may not represent an aircraft installation and the users must verify their application (see intended use for additional information).

The assembly shall be installed flat on a vibration fixture and shaker table as shown on figure 2. Clamps shall be mounted flat on the vibration fixture with 10-32 UNF-3a bolts (160 KSI or higher strength) and torqued to 30 inch pounds +/- 3 inch pounds. A flat washer shall be used beneath the head of the mounting bolt with the smooth edge against the clamp foot. A torque stripe (indicator) shall be applied to the fasteners to ensure no rotation occurs. A control accelerometer shall be mounted on the vibration fixture. Response accelerometers shall be mounted on the vibration fixture in close proximity to both clamps as shown on figure 3.

Clamp sizes -16, -24, and -32 shall be tested. Two samples of the same size and cushion material shall be mounted on test mandrels with spacing and dimensions as specified on figure 3 and Table II. Multiple mandrels with differing types of clamps may be operated on a test fixture at the same time provided they are within the fixture and test equipment capacity, and mandrels do not dynamically interact. If multiple mandrels are tested at one time, at least one mandrel of each type shall have the response accelerometer configuration shown on figure 3.

Vibration testing shall be conducted in the vertical and lateral axis only. After completing one axis of vibration, new/different clamps shall be used for the second axis.

Test mandrels shall be 6061-T6 aluminum alloy rods in accordance with ASTM B211. All dimensions shall be in accordance with Table II with surface roughness of 32 microinches R_A maximum. The mandrels may have shoulders to prevent slippage during vibration. The shoulders shall maintain a positive clearance from the vibration fixture and clamp under test. Shoulder dimension shall not exceed 0.25 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

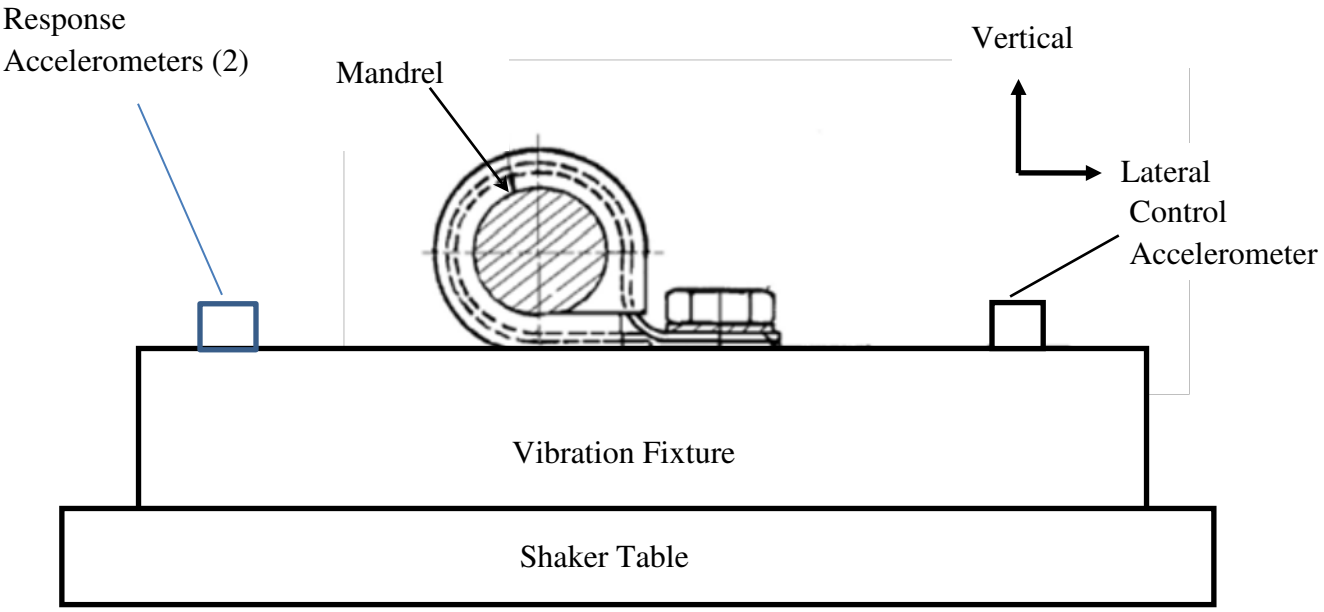


FIGURE 2. Axis definition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

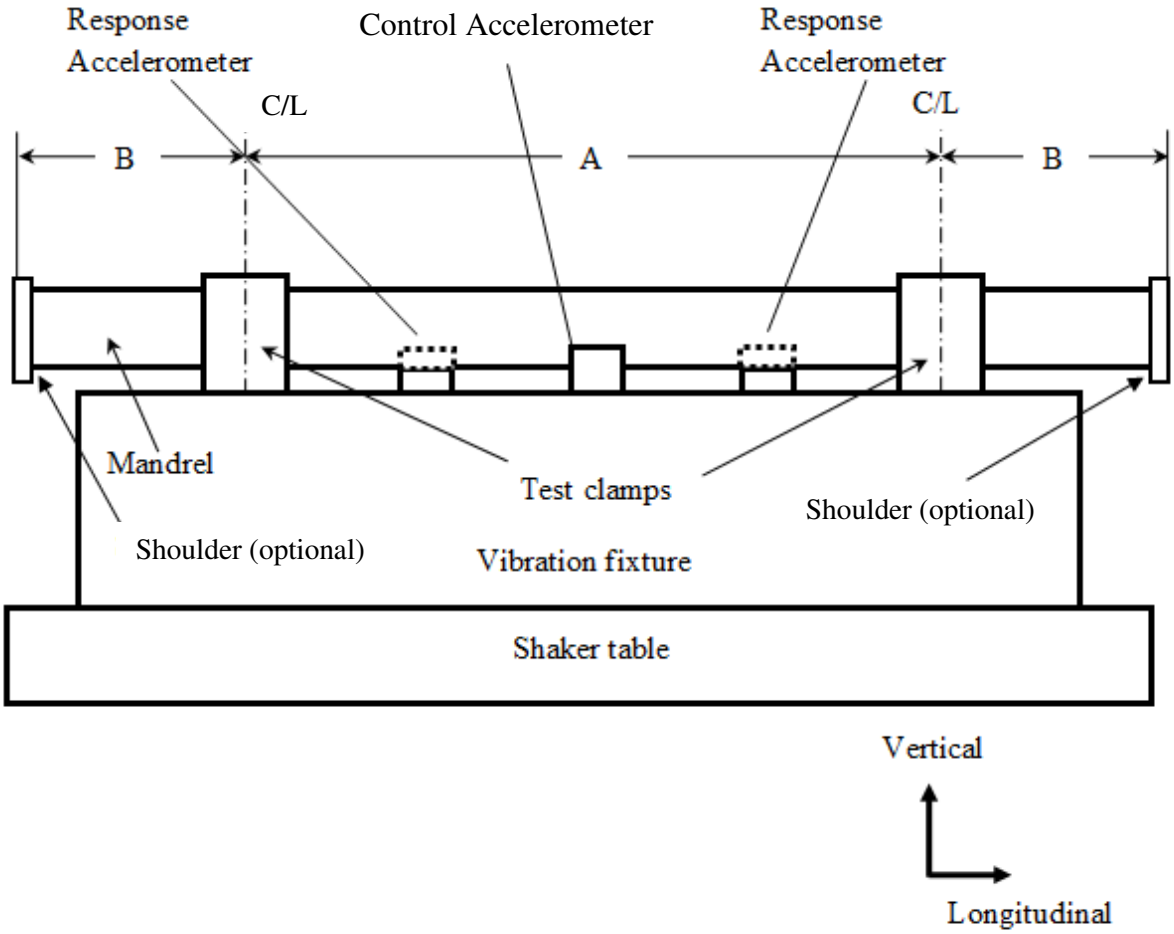


FIGURE 3. Clamp mounting and spacing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

TABLE II. Mandrel and clamp parameters.

Clamp size	Mandrel		Clamp spacing (see figure 3)	
	Dia ± .001 [in.]	Length ± .015 [in.]	A [in.]	B[in.]
-16	1.000	7.50	6.0	0.75
-24	1.500	7.50	6.0	0.75
-32	2.000	7.50	6.0	0.75

TABLE III. Break points for random vibration profile.

Clamp size	Overall acceleration [g_{RMS}]*	20 Hz Breakpoint [g^2/Hz]	500 Hz Breakpoint [g^2/Hz]	800 Hz Breakpoint [g^2/Hz]	Duration [minutes]
Random vibration vertical					
-16	18	0.604	0.604	0.0074	17
-24	8	0.119	0.119	0.0014	45
-32	7	0.091	0.091	0.0011	24
Random vibration lateral					
-16	18	0.604	0.604	0.0074	28
-24	12	0.266	0.266	0.0030	20
-32	8	0.119	0.119	0.0014	28

Clamp failure occurs when visible damage is observed. This includes cracks, distortions, breaks, or releasing of the locking device. Cushion failure occurs when visible damage is observed including: tearing in excess of 0.25 inch, exposure of loop metal, or separation from the clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

3. Retention of qualification. Retention of qualification shall be conducted by the Qualifying Activity and consists of the Examination of product requirements of MIL-DTL-85052 (see 3.4 and 4.4.2). Retention of Qualification shall be performed at 3-year intervals after the initial qualification approval date, unless otherwise notified by the qualifying activity. Initial vibration testing shall be conducted every three retention of qualification cycles (nine years).

4. Maximum weights. Maximum weights are shown in table IV.

TABLE IV. Clamp weights.

Clamp size	Max weight (pounds)
2-17	.0272
18-25	.0450
26-33	.0572
34-41	.0702
42-50	.0843
51-58	.0973
59-66	.1099

5. Qualification. Testing cannot begin until the supplier has received an authorization letter from the qualifying activity (see Note 2). The qualification process is described in SD-6, "Provisions Governing Qualification." The following examinations or tests shall be conducted by the Qualifying Activity on the clamp assembly: Examination of product, vibration, and thermal shock.

NOTES:

1. Clamp restrictions and applications.

a. Intended use. Clamps specified in this detail specification sheet are intended for the installation of aircraft wire cables, bundles, and harnesses, but may also be used for general clamping of tubing for aircraft systems. Not approved for use on hydraulic tubing. The user must select the appropriate size clamp and spacing between clamps to meet their installation requirements. In addition, the user must select the appropriate temperature rating and fluid exposure capabilities of the cushion material to meet their installation requirements. Not approved for butterfly installation with clamps in use on hydraulic tubing.

These clamps are intended for use as follows:

Temperature range: - 65° to + 212 °F (for higher temperature rated clamps, see MIL-DTL-85052/8 or /9). (See MIL-DTL-85052/8 and /9 for fluid exposure limitations.)

Systems: All fluid and electrical systems on aircraft and aerospace vehicles using petroleum based hydraulic fluids and where occasional fuel splashing may occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

b. Cushion. The chloroprene cushion designator is GW. This cushion is not recommended for new design (due to 212 °F temperature limit of the material). It is for general purpose use in areas exposed to petroleum based hydraulic fluids and occasional fuel splash and has excellent ozone resistance. It is not resistant to phosphate ester based fluids. It is not for use on titanium tubing. For new design, MIL-DTL-85052/10 (nitrile butadiene rubber) cushioned clamps may be used. MIL-DTL-85052/10 cushioned clamps should only be used when directed by an authorized maintenance manual or cognizant engineering authority.

c. Wires. Wires must be firmly installed in the clamp (see SAE AS50881 primary support).

d. Deleted.

e. Qualifying activity. The qualifying activity responsible for these clamps is the Naval Air Systems Command, AIR 4.4.5.3, 48298 Shaw Rd., Building 1461, Patuxent River, MD 20670-1900.

2. Test plan. It is recommended that the supplier provide a test plan based on the authorization letter to ensure the supplier and qualifying activity maintain communication and document changes as needed.

U.S. PATENT NOTICE

The clamps specified in this detail specification sheet are covered by the following United States patents. The Government does not have a royalty-free license.

Patent No. U.S. 7,392,569 and expires on 1 July 2028.

Referenced documents. In addition to MIL-DTL-85052, this specification sheet references:

SD-6	ASTM B211	SAE AMS-QQ-A-250/5
SAE AIR1351	SAE AMS2770	SAE AMS3209
MIL-DTL-5541	SAE AS50881	MIL-DTL-85052/8
MIL-DTL-85052/9	MIL-DTL-85052/10	

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SA, SH
Air Force - 11, 71
DLA - IS

Industry Association:
SAE AE-8C2

Preparing activity:
Navy - AS
(Project 5340-2016-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:15Z
Check the source to verify that this is the current version before use.