INCH-POUND

MIL-I-87070A(NU)

16 October 1990
SUPERSEDING
MIL-I-87070(NU)
10 December 1980

MILITARY SPECIFICATION

INSIGNIA, RANK, OFFICERS, SHOULDER MARK, NAVY (EMBROIDERED)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for soft shoulder marks for Navy rank officers with embroidered insignia.

1.2 Classification. The shoulder marks shall be of one type and size only in the following classes (see 6.2):

Class 1 - Officers of Flag Rank
Class 2 - Commissioned Officers below Flag Rank
Class 3 - Commissioned Warrant and Warrant Officers

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton

MILITARY

MIL-L-17507	- Lace, Ornamental
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
* MIL-STD-2073-1	- DOD Materials Procedures for Development and Application of Packaging Requirements
* MIL-STD-2073-2	- Packaging Requirement Codes

* (Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Color Card of Official Standardized Shades for Heraldic Yarns for Embroidery and Ribbons

(Application for copies of color cards should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927.)

* (Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.1.1 Approved contractor sample. When a guide sample is not available all requirements specified in this document and as exhibited by the approved contractor's sample shall apply (see 6.4).

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

3.3.1 Cloth, polyester/wool. The material used for the outer covering of the shoulder mark shall be a 10 ounce plain weave, polyester/wool blend fabric conforming to type III, class 3 of MIL-C-21115. The cloth shall be dyed to match shade Blue 3346, piece number 4-001369.

3.3.2 Cloth, fusible. The fusible material used for interlining the outer covering of the shoulder mark shall be suitable for the purpose intended. The fusible cloth shall have a maximum thickness of 0.030 inches and when dyed shall have good colorfastness to wet and dry crocking when tested as specified in 4.4.1.

3.3.3 Cloth, laminated. The basic material for fabricating the shoulder marks shall be the two fabrics described in 3.3.1 and 3.3.2 fused together with heat and pressure, forming a laminated material that shall conform to the requirements specified in Table I when tested as specified in 4.4.1. The laminated cloth shall show no evidence of bubbling or bleed thru.

Table I - Laminated Fabric Requirements

Characteristic	Requirement	
	Minimum	Maximim
Stiffness - inch lbs. (N.m)		
Warp	50 (5.65)	89 (10.06)
Filling	30 (3.39)	57 (6.44)
Peel strength - ounces (grams)		
Warp direction only	23 (652.04)	

3.3.4 Thread. The thread used for attaching lace, seaming and hemming the shoulder marks shall be cotton, or rayon-covered polyester conforming to ticket number 50, 2 or 3 ply of MIL-T-43548. Polyester covered thread is not permitted. The thread shall be dyed to approximate the shade of the face side of the laminated material or gold lace, depending on where the thread is to be used. As an alternate, the thread may be cotton conforming to type I, IC2, ticket no. 00, 3 ply of V-T-276.

3.3.5 Lace, ornamental. The gold lace for shoulder marks shall conform to MIL-L-17507 as indicated below:

a. Class 1 shoulder marks - type II, classes 1 through 5, style A, in 1/4 inch (2 vellum) and 1 inch (2 vellum) widths.

b. Class 2 shoulder marks - type II, classes 1 through 5, style A, in 1/8 inch (1 vellum) and 3/8 inch (2 vellum) widths.

c. Class 3 shoulder marks - type II, classes 1 through 5, style B, sub-style B2, application 2 and 3, widths 1/2 and 1/4 inch.

* 3.3.6 Embroidery materials. The synthetic metallic type embroidery materials shall conform to type III, classes 8 and 10 of MIL-E-17568. The rayon used for highlights of the embroidered devices, when specified, shall be continuous filiment regenerated cellulose dyed Black C.A. No. 67138 or Ultramarine Blue, C.A. No 67118. Inspection shall be as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

3.4 Design. The soft shoulder marks shall be flat and trapezoidal shaped (see Figure 1).

3.4.1 Figures. Figures are furnished for informational purposes only. When inconsistancies exist between the specification and the figures, the specification shall govern.

3.5 Construction.

3.5.1 Embroidery. The device for each class of shoulder mark shall be hand or machine embroidered through the face side of the laminated cloth employing the applicable yarn specified in 3.3.6. The embroidered device shall conform to the government furnished guide sample (see 6.3) or the approved contractor's sample (see 6.4). Sufficient laminated cloth shall be allowed in all directions so shoulder marks can be properly hemmed, joined together, and meet finished shoulder mark measurements.

3.5.2 Stitching. Hemming and joining operations shall be at locations indicated in Figure 1. Each stitchline shall have a minimum of 8 stitches per inch using stitch type 301 of FED-STD-751. Seam allowances for hemming and joining operations shall be 3/8 inch. Edgestitching for hems shall be 1/16 to 1/8 inch from folded edge.

NOTE: If, after stitching on stripes, the background cloth becomes too stiff and bulky for turning the shoulder mark inside out, hand stitching of the back seam shall be permitted. However, when hand stitching is used to close the back seam, the seam allowances shall be stitched down first.

3.5.3 Attachment of stripes (lace). All stripes shall be stitched to the laminated cloth 1/16 inch from finished edge of lace. The various width stripes shall circumvent the width direction of the shoulder mark with each end of striping being caught in the joining seam on back side of mark.

3.6 Dimensions. The overall dimension of finished shoulder marks shall be as indicated in Figure 1. Unless otherwise specified in this document dimensional tolerances shall be as follows:

Measurement	Tolerance in inches
Length of shoulder mark	± 1/8
Width of shoulder mark (each end)	± 1/8
Stripes	
Width	± 1/32
Spacing between	± 1/16
Design (stars, anchors, corps device)	
Overall size	± 1/16
Placement	± 1/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

* 3.7 Embroidered devices. The embroidered line, staff or corps devices shall be embroidered with the embroidery materials specified in 3.3.6. The design of the device shall be in accordance with the guide sample. Dimensions, location, and color of devices shall be as shown in the applicable figure and as indicated as below:

Class 1 and 2 - The star and all corps devices shall be embroidered in gold except for the following:

Dental Corps - Acorns shall be embroidered in silver
Medical Corps - Acorns shall be embroidered in silver
Judge Advocate General - Millrind shall be embroidered in silver
Civil Engineer - Acorns shall be embroidered in silver
*Chaplain Corps (Jewish) - Inside of star shall be embroidered in blue rayon
*Law Community - Millrind and quill shall be embroidered in silver

Class 3 - All class 3 corps devices shall be embroidered in gold.

3.8 Pressing. The finished shoulder mark shall be pressed flat into the trapezoidal shape indicated in Figure 1.

3.9 Workmanship. The finished shoulder mark shall be clean, well-made, and shall conform to the quality of product established by this document. The occurance of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance may be submitted for the fusible cloth requirements of 3.3.2, the laminated cloth requirements of 3.3.3 and the rayon yarn requirements of 3.3.6. The laminated cloth shall be tested for the characteristics specified in Table I in accordance with the referenced test methods of FED-STD-191 in Table II. All test reports shall contain the individual values used in expressing the final result. The sample unit for testing the fusible and laminated cloths shall be 1/4 continuous and full width yard. The lot shall be unacceptable if one or more units fail to meet any requirements specified. The sample size for testing the fusible and laminated cloths shall be as follows:

Lot size (yards)	Sample size (units)
800 or less	2
801 through 22,000	3
22,001 and over	5

Table II - Testing of laminated cloth

Characteristic	Requirement Paragraph	Test Method
Thickness	3.3.2	5030
Colorfastness to crocking	3.3.2	5651 1/
Appearance	3.3.3	Visual
Stiffness	3.3.3	5206 2/
Peel strength	3.3.3	5951

1/ Method B with white test cloth.

2/ Average of six samples, three tested with fusible interlining side down and three with fusible interlining side up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of pairs of shoulder marks. The sample unit shall be one finished pair (left and right, when applicable) of shoulder marks.

4.4.2.1 Visual examination. The shoulder marks shall be examined for defects in color, design, material, construction, workmanship and the defects classified in accordance with Table III.

Table III - Classification of defects

Examine	Defect
I. FABRIC, LAMINATED	1. Hole, cut, tear, misweave, slub, knot, broken end or pick (clearly visible)
	2. Spot or stain
	3. Material not as specified
	4. Color not as specified
	5. Visual evidence of bubbling, color change, or bleed through
II. STRIPE, GOLD LACE	1. Type, color or pattern not as specified
	2. Any scuffed or abraded area
	3. Spot or stain
	4. Not securely attached
	5. Uneven spacing between stripes
III. SEAMS AND STITCHING	1. Not specified seam or stitch type
	2. Less than 8 stitches per inch
	3. Stitching runoff
	4. Broken or missing stitches
	5. Loose or tight tension, affecting appearance
	6. Seams or stitch lines crooked or irregular, affecting appearance
	7. Thread not an approximate match to face fabric or gold lace
	8. Edgestitching on hems not 1/16 to 1/8 inch from folded edge
	9. Seam allowance for hemming and joining operations not 3/8 inch wide
IV. EMBROIDERED DESIGN	1. Any deviation from guide sample or approved contractor sample
	2. Any design missing or mispositioned, affecting appearance
	3. Poorly defined, distorted or misshaped
	4. Unrelated colors or yarn visible on face
	5. Surface yarns loose, tight or shifted
	6. Bunched, kinked or tangled yarns on face
V. PRESSING	1. Singed or scorched
	2. Creases or gloss marks
	3. Misshaped by pressing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional and pairing examinations. The finished shoulder marks shall be examined for defects in accordance with the following:

a. Any measurement deviating from the minimal dimensions and tolerances specified for the finished shoulder mark shall be scored as a defect.

b. A poor color match of synthetic metallic yarn between paired shoulder marks shall be classified as a defect.

c. Not paired as lefts and rights shall be classified as a defect (when applicable)

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and the acceptable quality levels (AQL's), expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	Inspection level	AQL
For visual examination (4.4.2.1)	II	6.5
For dimensional examination (4.4.2.2)	S-1	6.5
For pairing examination (4.4.2.2)	S-4	1.5

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each pair of shoulder marks shall be packaged in a commercial grade tuck end type folding paperboard box. The outside of each box shall measure approximately 4-1/2 inches long by 2-1/2 inches wide by 1 inch in depth.

5.1.2 Level C. The shoulder marks shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first recieving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A or C, as specified (see 6.2).

5.2.1 Level A. Shoulder marks preserved as specified in 5.1, shall be packed as specified by the procuring activity.

5.2.2 Level C. Items preserved, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The embroidered soft shoulder marks are intended for wear by male and female officer personnel of the Navy as insignia of ranks.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Class required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2)
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quality, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.4).

6.3 Guide sample. For access to a guide sample, address the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490.

6.4 Approved contractor sample. A contractor submitting a sample for government approval shall forward the sample to the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490.

* 6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

* 6.5 Subject term (key word) listing.
Board, shoulder
Device, corps
Device, warrant
Lace, gold
Soft

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activity:
DLA - CT

Project 8455-N528

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.



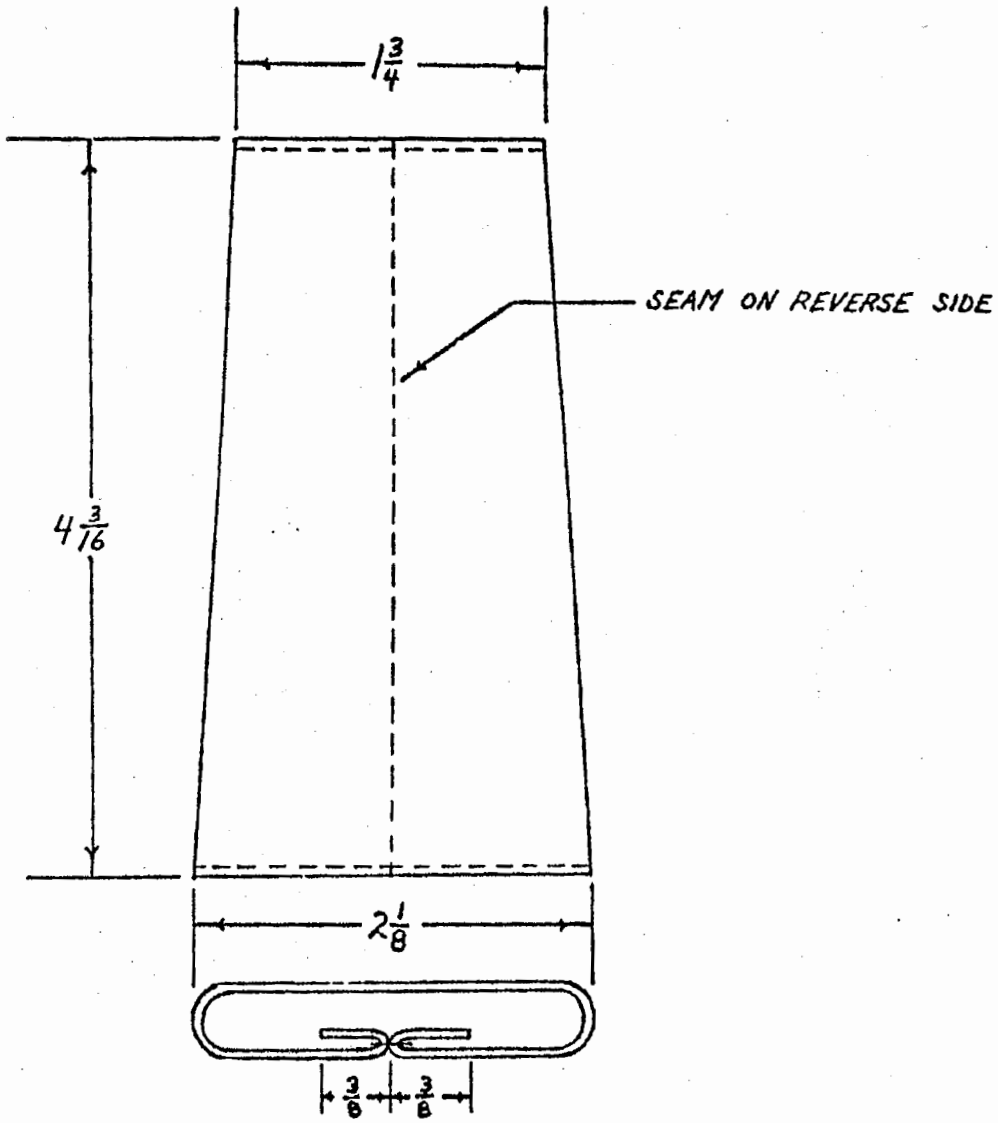


FIGURE 1 - SHOULDER MARK, SOFT


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

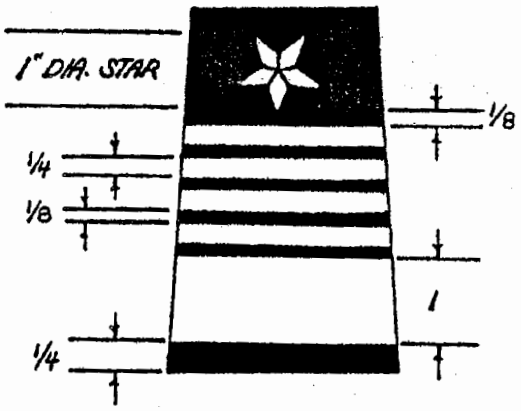


FLEET ADMIRAL

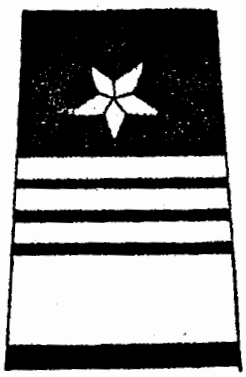

ADMIRAL

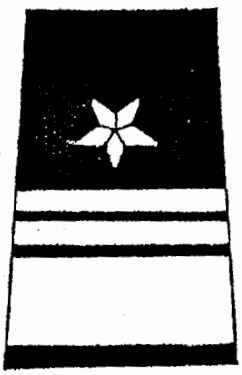

VICE ADMIRAL

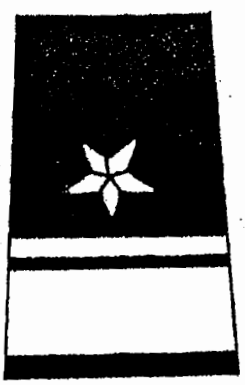

REAR ADMIRAL



COMMODORE

FIGURE 2 - OFFICERS OF FLAG RANK

NOTE: WHEN APPLICABLE, CORPS DEVICE SHALL BE USED IN LIEU OF THE STAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.


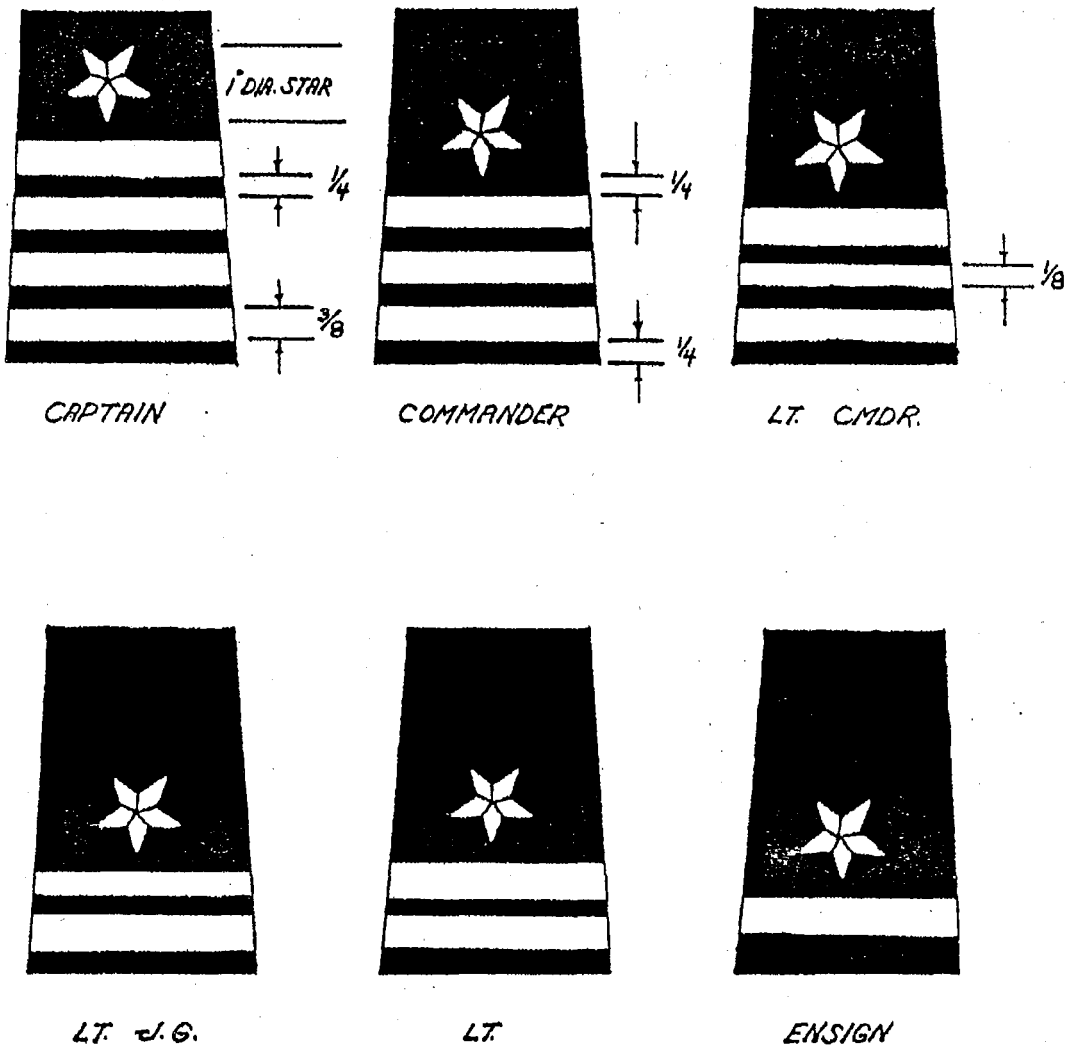


FIGURE 3 - COMMISSIONED OFFICERS BELOW FLAG RANK
NOTE: WHEN APPLICABLE, CORPS DEVICE SHALL BE USED IN LIEU OF THE STAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

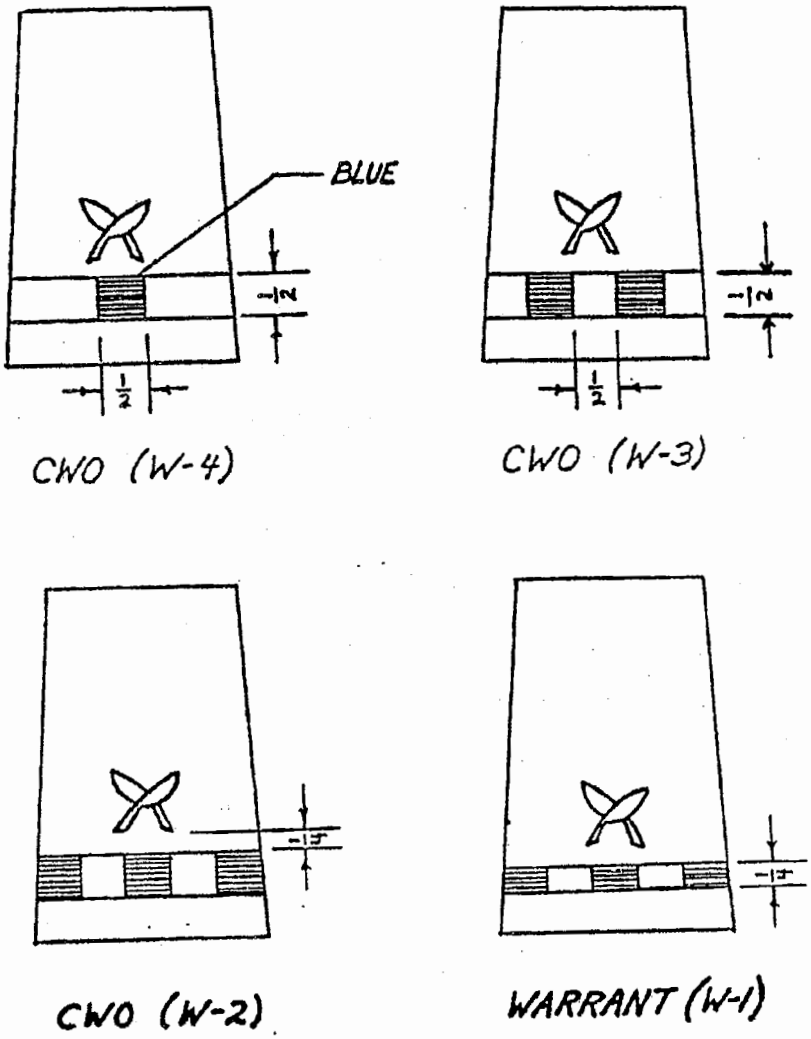

CWO (W-4)

CWO (W-3)

CWO (W-2)


WARRANT (W-1)

CLASS 3 - COMMISSIONED WARRANT AND WARRANT OFFICERS


NOTE: SEE FIGURES 7, 8, AND 9 FOR CLASS 3 LINE AND STAFF CORPS DEVICES

FIGURE - 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

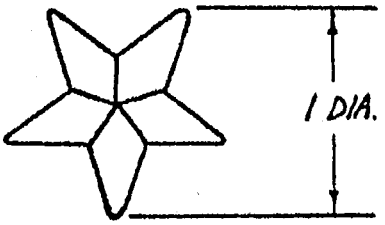


LINE

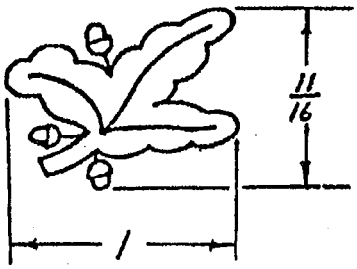


SUPPLY CORPS *




DENTAL CORPS

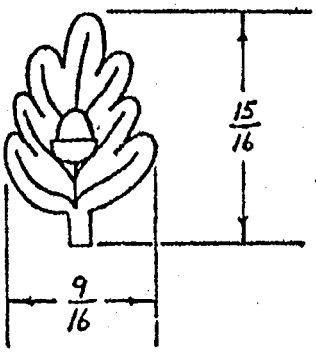


MEDICAL CORPS



MEDICAL SERVICE CORPS *




NURSE CORPS




LEADER USN/USNA BAND

FIGURE 5- LINE AND STAFF CORPS DEVICES
CLASS 2 * RIGHT AND LEFT


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

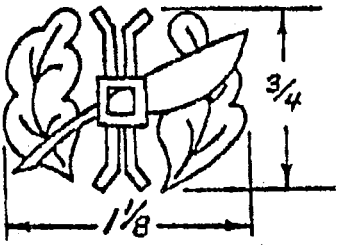


LDO-LAW COMMUNITY *

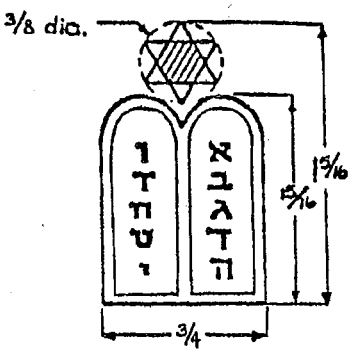


CHAPLAIN CORPS (JEWISH)

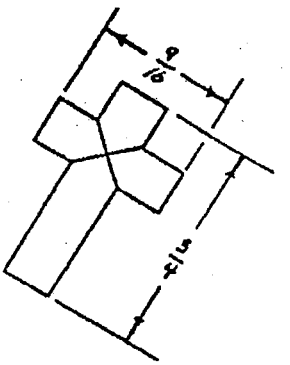

CHAPLAIN CORPS * (CHRISTIAN)




JUDGE ADVOCATE GENERAL'S CORPS

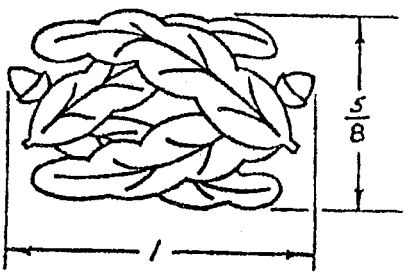


CIVIL ENGINEER CORPS *

FIGURE 6 - LINE AND STAFF CORPS DEVICES
CLASS 2 * RIGHT AND LEFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

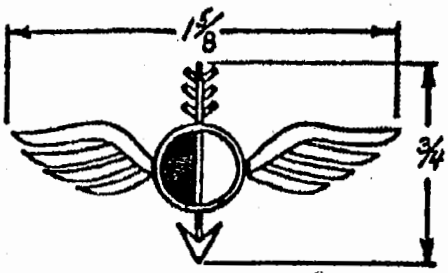


AEROGRAPHER *

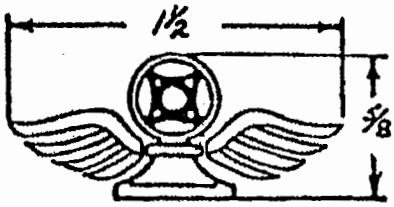


AIR TRAFFIC CONTROL TECHNICIAN




AVIATION BOATSWAIN

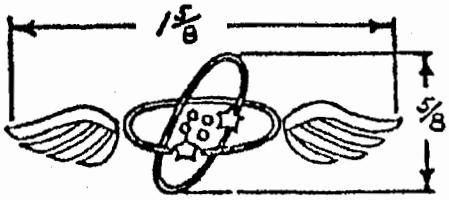


AVIATION ELECTRONICS TECHNICIAN *

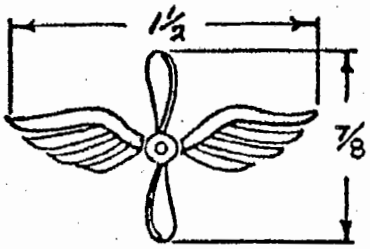

AVIATION MAINTENANCE TECHNICIAN

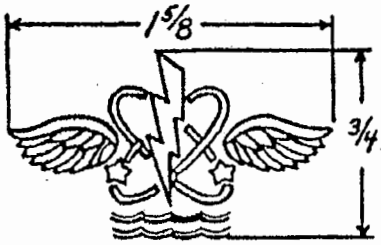


AVIATION OPERATIONS TECHNICIAN

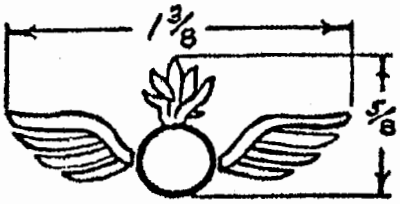

AVIATION ORDNANCE TECHNICIAN


* RIGHT AND LEFT




BANDMASTER

FIG. 7 - CLASS 3 LINE AND STAFF CORPS DEVICES


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

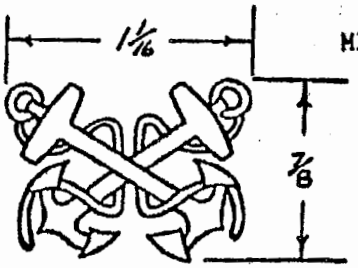


BOATSWAIN




ENGINEERING TECHNICIAN
NUCLEAR POWER TECHNICIAN




CRYPTOLOGIC TECHNICIAN *




EXPLOSIVE ORDNANCE DISPOSAL TECHNICIAN *




DATA PROCESSING TECHNICIAN *



INTELLIGENCE TECHNICIAN *



ELECTRONICS TECHNICIAN *




OPERATIONS TECHNICIAN *


* RIGHT AND LEFT

FIG. 8 - CLASS 3 LINE AND STAFF CORPS DEVICES


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.




ORDNANCE TECHNICIAN

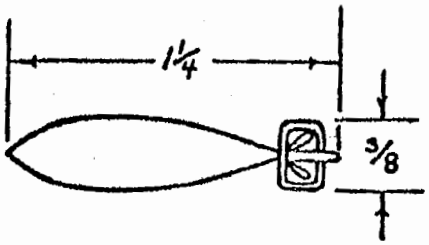


UNDERWATER ORDNANCE TECHNICIAN *




PHOTOGRAPHER *




MEDICAL SERVICE
DENTAL SERVICE
PHYSICIAN'S ASSISTANT




REPAIR TECHNICIAN *



CIVIL ENGINEER



SHIP'S CLERK




SUPPLY AND FOOD SERVICE *


* RIGHT AND LEFT

FIG. 9 - CLASS 3 LINE AND STAFF CORPS DEVICES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.

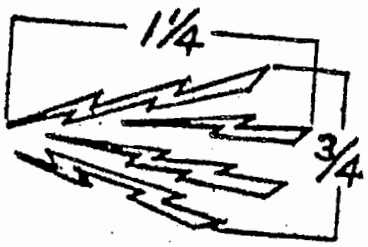

COMMUNICATIONS TECHNICIAN *



PHYSICAL SECURITY TECHNICIAN

* LEFT AND RIGHT

FIG. 10 - CLASS 3 LINE AND STAFF CORPS DEVICES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:42Z
Check the source to verify that this is the current version before use.