MILITARY SPECIFICATION

RADIO SET AN/SRC-8( ) AND UNITS OF
PACKAGING OF

This specification is approved for use by Communications Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for packaging of Radio Set AN/SRC-8( ) and Units Of for shipment and storage.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	Plastic Sheet and Strip, Thin Gauge, Polyolefin
NN-P-71	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	Strapping, Steel and Seals
PPP-B-20	Bags, Cotton, Mailing
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-C-843	Cushioning Material, Cellulosic
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes
PPP-P-291	Paperboard, Wrapping and Cushioning
PPP-S-760	Strapping, Nonmetallic (and Connectors)
PPP-T-76	Tape, Packaging, Paper, (For Carton Sealing)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-MMD-P, Fort Monmouth, New Jersey 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

PPP-T-97	Tape; Pressure-Sensitive Adhesive, Filament Reinforced

MILITARY

MIL-E-75	Electron Tubes, Preparation for Delivery Of
MIL-P-116	Preservation-Packaging, Methods Of
MIL-B-117	Bags, Sleeves and Tubing - Interior Packaging
MIL-P-130	Paper, Wrapping, Laminated and Creped
MIL-R-5001	Rubber Cellular Sheet, Molded and Hand Built Shapes, Latex Foam
MIL-E-6060	Envelopes, Packaging, Water Vaporproof, Flexible

STANDARDS

FEDERAL

FED-STD-101	Preservation, Packaging and Packing Materials: Test Procedures

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Preservation. Preservation shall be level A or B as specified (see 6.1b).

3.1.1 Level A.

3.1.1.1 Cleaning. Each Radio Set AN/SRC-8( ) and Units Of shall be cleaned in accordance with process C-1 of MIL-P-116.

3.1.1.2 Drying. Each Radio Set AN/SRC-8( ) and Units Of shall be dried in accordance with the applicable procedure of MIL-P-116.

3.1.1.3 Preservative application. No preservative required.

3.1.1.4 Unit packing. Unit packing shall be in accordance with the methods or submethods prescribed in MIL-P-116 as specified herein, insuring compliance with the applicable requirements of that specification.

3.1.1.4.1 Technical literature. Each technical literature shall be unit packed submethod IC-1.

3.1.1.4.2 Receiver-Transmitter RT-306/SRC-8 or RT-327/SRC-8XX or RT-663/GRC-8BZ, Accessories and Spares. Each receiver-transmitter, accessories and spares shall be unit packed in accordance with items 1 through 11 of table I and figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

3.1.1.4.3 Control, Radio Set C-1429/SRC-8 or C-4184A/SRC-8BZ and Accessories. Each control and accessory shall be unit packed in accordance with items 1 through 9 of table II and figure 2.

3.1.1.4.4 Antenna AT-609/SRC-8. Each antenna shall be unit packed in accordance with items 1 through 7 of table III and figure 3.

3.1.1.4.5 Converter, Dynamotor; PU-283/SRC-8 or CV-522/SRC-8 or Power Supply PP-1055/GRC-8X or PP-3739/SRC-8AX, Accessories and Spares. Each converter, dynamotor or power supply, accessory and spare shall be unit packed in accordance with items 1 through 9 of table IV and figures 4 and 5, respectively.

3.1.2 Level B. Cleaning, drying, preservative application and unit packing shall be as specified in 3.1.1 except that submethod IC-2 (modified) shall be substituted for submethod IA-14 and the barrier bag shall be type I, class C, style 1 of MIL-P-117 in lieu of bag specified in MIL-E-6060.

3.2 Packing. Packing shall be level A or B, as specified (see 6.1b). Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents when tested in accordance with Methods 5016 and 5017 of FED-STD-101.

3.2.1 Level A.

3.2.1.1 Units of AN/SRC-8( ). A multiple quantity of components comprising the Radio Set AN/SRC-8( ), unit packed as specified in 3.1 and bearing the same stock number, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A. When a single unit is shipped to a single destination the unit shall be individually packed as specified above.

3.2.1.1.1 Unitization. Palletization shall be required when: containers specified in 3.2.1 do not require skids; quantities per destination exceed either a total of 250 pounds (excluding the pallet) or a volume of 20 cubic feet; and the container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers, packed as specified in 3.2.1 except that container strapping may be omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film conforming to L-P-378, type IV.

3.2.1.2 Antenna. No further packing is required. Unit container shall serve as the shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

3.2.1.3 Radio Set AN/SRC-8( ). Each radio set, unit packed as specified in 3.1, shall be packed as specified in 3.2.1. Place the technical literature, unit packed as specified in 3.1.1.4.1 on top of the contents, directly under the lid of the box.

3.2.1.3.1 Packing sequence. The components of Radio Set AN/SRC-8( ), packed as specified in 3.2.1, shall be arranged in the following sequence:

Box 1/2 Radio Set AN/SRC-8( )
Box 2/2 Antenna AT-609/SRC-8.

3.2.2 Level B. A multiple quantity of components comprising the Radio Set AN/SRC-8( ), unit packed as specified in 3.1 and bearing the same stock number, shall be packed within a close-fitting box conforming to PPP-B-640, class 2, style E or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film conforming to L-P-378, type IV. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

3.2.2.1 Unitization. Palletization shall be required when quantities per destination exceed either a total of 250 pounds (excluding the pallet) or a volume of 20 cubic feet; and the container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of Radio Set AN/SRC-8( ) or components comprising the Radio Set AN/SRC-8( ) and bearing the same stock number, unit packed as specified in 3.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film conforming to L-P-378, type IV.

3.2.2.2 Antenna. No further packing is required. Unit container shall serve as the shipping container.

3.2.2.3 Radio Set AN/SRC-8( ). Each radio set, unit packed as specified in 3.1, shall be packed as specified in 3.2.2. Place the technical literature, unit packed as specified in 3.1.1.4.1 on top of the contents, directly under the lid of the box.

3.2.2.3.1 Packing sequence. Radio Set AN/SRC-8( ), packed as specified in 3.2.2, shall be arranged in the sequence as specified in 3.2.1.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

3.3 Marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

3.4 Workmanship. The quality of workmanship shall be such as to permit acceptance of the completed packaging requirements in accordance with the testing specified in section 4.

3.5 Deviations. Requests for deviation in packaging design shall be supported by test data proving the ability of the equipment, packaged in accordance with the proposed design change, to withstand the applicable tests for the selected method, including the rough handling tests in accordance with MIL-P-116. Deviation approval shall be contingent on availability of packaging materials selected and economies realized.

3.6 Dimensional data. Dimensions of packaging materials in the Bill of Materials Table are based on the dimensions of the equipment cited in the table. When the dimensions of the equipment vary from those cited, the dimensions of packaging materials shall be adjusted accordingly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Quality conformance inspection of Section 3 requirements shall be in accordance with the Group A, Group B, and, when required (see 6.1c), the Group C (rough handling) requirements of MIL-P-116. Inspection lots shall be in accordance with MIL-P-116.

5. PACKAGING

5.1 Packaging. Not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify:

a. Title, number and date of this specification and any amendment thereto.

b. Level A or level B preservation and packing (see section 3).

c. When rough handling test is required (see section 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

6.2 Environmental. Environmental pollution prevention measures are contained in the packaging material specification referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - CR

Preparing Activity:
Army - CR

Review Activity:
Army - SM

Priject PACK-A261

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

TABLE I. Bill of Material.

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	S
1	Receiver-Transmitter											
	RT-306/SRC-8 or	1	IA-14	18-1/2	10-1/4	23	(Bare wt. 64 lbs.)					
	RT-327/SRC-8XX	1	IA-14	18-1/2	10-1/4	23	(Bare wt. 64 lbs.)					
	or RT-633/GRC-8BZ	1	IA-14	9-1/2	13-3/8	19	(Bare wt. 45 lbs.)					
2	Cell, Top	1		10	11-3/4	2	PPP-F-320	CF	DOM	SW	275	
3	Cell, Top	1		12-3/4	11-3/4	2	PPP-F-320	CF	DOM	SW	275	
4	Pad, Bottom	1		19-1/4	11-3/4	3/4	PPP-F-320	CF	DOM	SW	275	
5	Pad, Front and Back	2		22	22-3/4	3/4	PPP-F-320	CF	DOM	SW	275	
6	Pad, Side	1		22-3/4	10-1/4	3/4	PPP-F-320	CF	DOM	SW	275	
7	Cell, Side	1		22-3/4	10-1/4	3-1/2	PPP-F-320	CF	DOM	SW	275	
8	Accessories and Spares:											
	Grid Cap	2	III									
	Cushioning	2		4	4		PPP-C-843	II	B			
	Tape	2		9	4		PPP-T-76					
	Handset	1	III									
	Cushioning	1		17	14		PPP-C-843	II	B			
	Tape	2		10	2		PPP-T-76					
9	Box	1		22-3/4	11-3/4	25-1/2	PPP-B-636	CF	DOM	SW	275	
	Blunt all corners of the box and cover any exterior stapled or stitched joints with tape conforming to PPP-T-76. Closure shall be in accordance with the appendix of the box specification.											
10	Bag	1		51	39		MIL-E-6060					
11	Box	1		23-1/2	12-1/2	26-1/4	PPP-B-636				W5c	
	Cover interior stapled or stitched joints with tape conforming to PPP-T-76. Closure shall be in accordance with the appendix of the box specification.											

T - Type C - Class V - Variety G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

TABLE II. Bill of Material.

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	S
1	Control, Radio Set											
	C-1429/SRC-8 or	1	IA-14	7-3/4	3-1/2	10-1/8						
	C-4184/SRC-8BZ	1	IA-14	7-3/4	3-1/2	10-1/8						
2	Accessories:											
	Cable Assembly	1	III									
	Tape	3		4	2		PPP-T-76					
	Handset	1	III									
	Cushioning	1		16	16		PPP-C-843	II	B			
	Tape	2		6	2		PPP-T-76					
	Box	1		7-3/4	4-1/4	10-1/8	PPP-B-636	CF	DOM	SW	125	
	Box closure shall be in accordance with the appendix of the box specification.											
3	Cell, Side	2		10-1/8	7-3/4	1	PPP-F-320	CF	DOM	SW	125	
4	Cell, Bottom	1		9-3/4	8-3/4	1-1/2	PPP-F-320	CF	DOM	SW	125	
5	Cell, Back	1		10	7-3/4	1	PPP-F-320	CF	DOM	SW	125	
6	Cell, Top	1		9-3/4	8-3/4	1-1/2	PPP-F-320	CF	DOM	SW	125	
7	Box	1		9-3/4	8-3/4	13-1/8	PPP-B-636	CF	DOM	SW	125	
	Blunt all corners of the box and cover any exterior stapled or stitched joints with tape conforming to PPP-T-76. Closure shall be in accordance with the appendix of the box specification.											
8	Bag	1		26	24		MIL-B-117	II	E			1
9	Box	1		10-3/8	9-7/8	13-1/2	PPP-B-636				W5c	
	Cover interior stapled or stitched joints with tape conforming to PPP-T-76. Closure shall be in accordance with the appendix of the box specification.											

T - Type C- Class V - Variety G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

TABLE III. Bill of Material.

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	S
1	Antenna AT-609/SRC-8	1	III	167	2 (Dia)		(Bare wt. 16 lbs.)					
2	Element, Antenna	2	III	108	3/4(Dia)							
	Wrapping, Paper	2		111	5		MIL-P-130	II				
	Tape	6		5	2		PPP-T-76					
	Roll each element in paper and secure wrap with tape. Place wrapped elements within item 1.											
	Wrapping, Paper	1		170	5		MIL-P-130	II				
	Tape	4		5	2		PPP-T-76					
	Roll antenna containing elements in paper and secure wrap with tape.											
3	Cushioning	4		14	6	1	MIL-R-5001	II			C	
	Space equally in box from end to insulator.											
4	Cushioning	1		6	6	1	MIL-R-5001	II			C	
5	Cushioning	2		3	3	2	MIL-R-5001	II			C	
6	Box	1		169-1/4	3	3	PPP-B-621		2			1
	Modified with exterior battens as shown in figure 3.											
7	Strapping, Steel	8		24		3/8 0.015	QQ-S-781	I	Finish A		2	

T - Type C - Class V - Variety G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Bill of Material.

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	S
1	Converter-Dynamotor PU-283/SRC-8 or	1	III									
	Converter-Dynamotor CV-522/SRC-8 or	1	III									
	Power Supply PP-1055/SRC-8X	1	III=									
	or PP-3739/SRC-8AX	1	III									
2	Cable Assembly CX-3761/SRC-8	1	III									
	or CX-11220/GRC-8CZ	1	III									
	Tape	3		8	2		PPP-T-76	II				
	Wind cable into a coil of proportionate dimensions and secure in three equidistant places with tape.											
	Fuse	5	III									
	Paperboard	1		6	3		PPP-P-291	II				
	Fuse	10	III									
	Paperboard	2		6	3		PPP-P-291	II				
	Tape	3		4	2		PPP-T-76					
	Place required fuses within the corrugations of the paperboard. Space appropriately and roll to compact package. Secure roll with tape.											
	Brush, Carbon	8	IC-1									
	Paperboard	8		5	2		PPP-P-291	II				
	Tape	8		4	1		PPP-T-76					
	Bag	8		3	3		MIL-B-117	II	C			
3	Cell, Top	1		14-3/8	10-5/8	2	PPP-F-320	CF	WR	SW	W5c	
4	Pad, Bottom	1		14-3/8	10-5/8	9/16	PPP-F-320	CF	WR	TW		
5	Pad, Side	2		10-5/8	8-1/4	9/16	PPP-F-320	CF	WR	TW		
6	Pad, Corner	4		11	3	3	PPP-F-320	CF	WR	TW		
7	Box	1		16	11	11-1/4	PPP-B-636				W5c	
8	Accessories and Spares:											
	Cradle 1	1	III									
	Cushioning	1		8	8		PPP-P-291	II				
	Tape	2		5	2		PPP-T-76					
	Antenna, Hardware	1set	III									

T - Type C - Class V - Variety G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Bill of Material.

REF No.	ITEM Nomenclature	No. Reqd	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	S
	Bag			5	3		PPP-B-20					
	Base Assembly	1	III									
	Paperboard	1		14	14		PPP-P-291	II				
	Tape	2		5	2		PPP-T-76					
	Bracket Assembly	1	III									
	Paperboard	1		12	11		PPP-P-291	II				
	Tape	2		5	2		PPP-T-76					
	Insulator	1	IC-1									
	Paperboard	1		4	4		PPP-P-291	II				
	Tape	1		3	2		PPP-T-76					
	Bag	1		3	3		MIL-B-117	II	C			
	Electron Tube	11					MIL-E-75					
	Lamp	6	III									
	Paperboard			4	4		PPP-P-291	II				
	Tape	2		4	1		PPP-T-76					
	Place lamps within corrugations of the paperboard. Space appropriately and roll to compact package. Secure roll with tape.											
	Brush, Carbon	4	IC-1									
	Bag	4		3	3		MIL-B-117	II	C			1
	Box	1		12-3/8	10-1/4	11-1/4	PPP-B-636				W5c	
	Place accessories and spares within the fiberboard box. Fill all voids with paperboard, conforming to PPP-P-291, type II, to prevent movement.											
9	Box	1		16	21-1/4	11-1/4	PPP-B-636				W5c	
	Consolidate boxes under references 7 & 8 within this box. Closure of each box shall be in accordance with the appendix of the box specification.											

T - Type C - Class V - Variety G - Grade S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

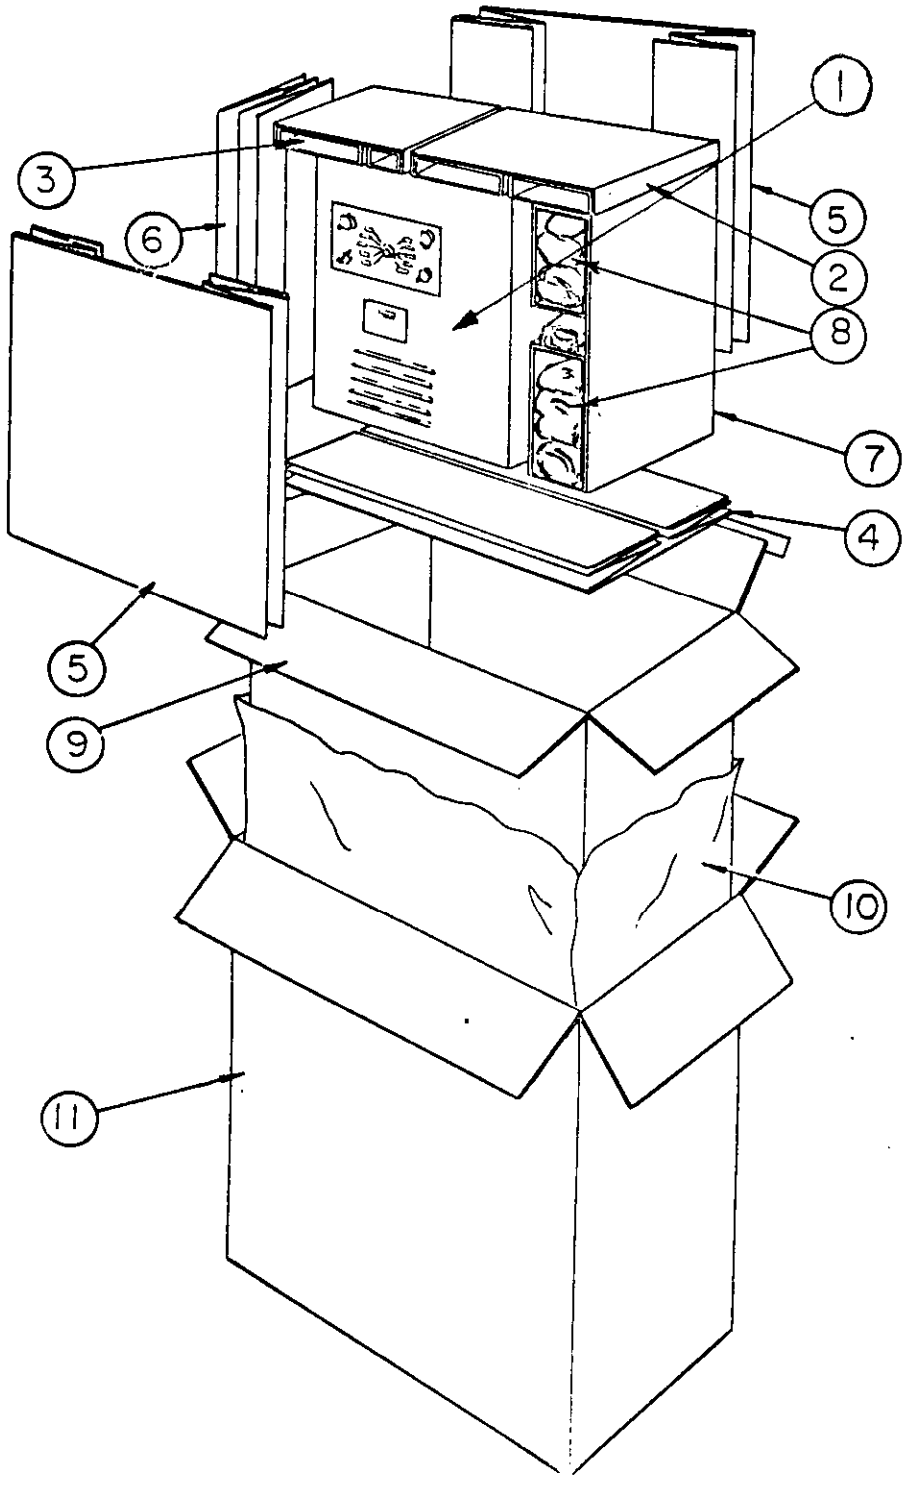


FIGURE 1. Receiver-Transmitter RT-306/SRC-8 or RT-327/SRC-8XX or RT-633/GRC-8BZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

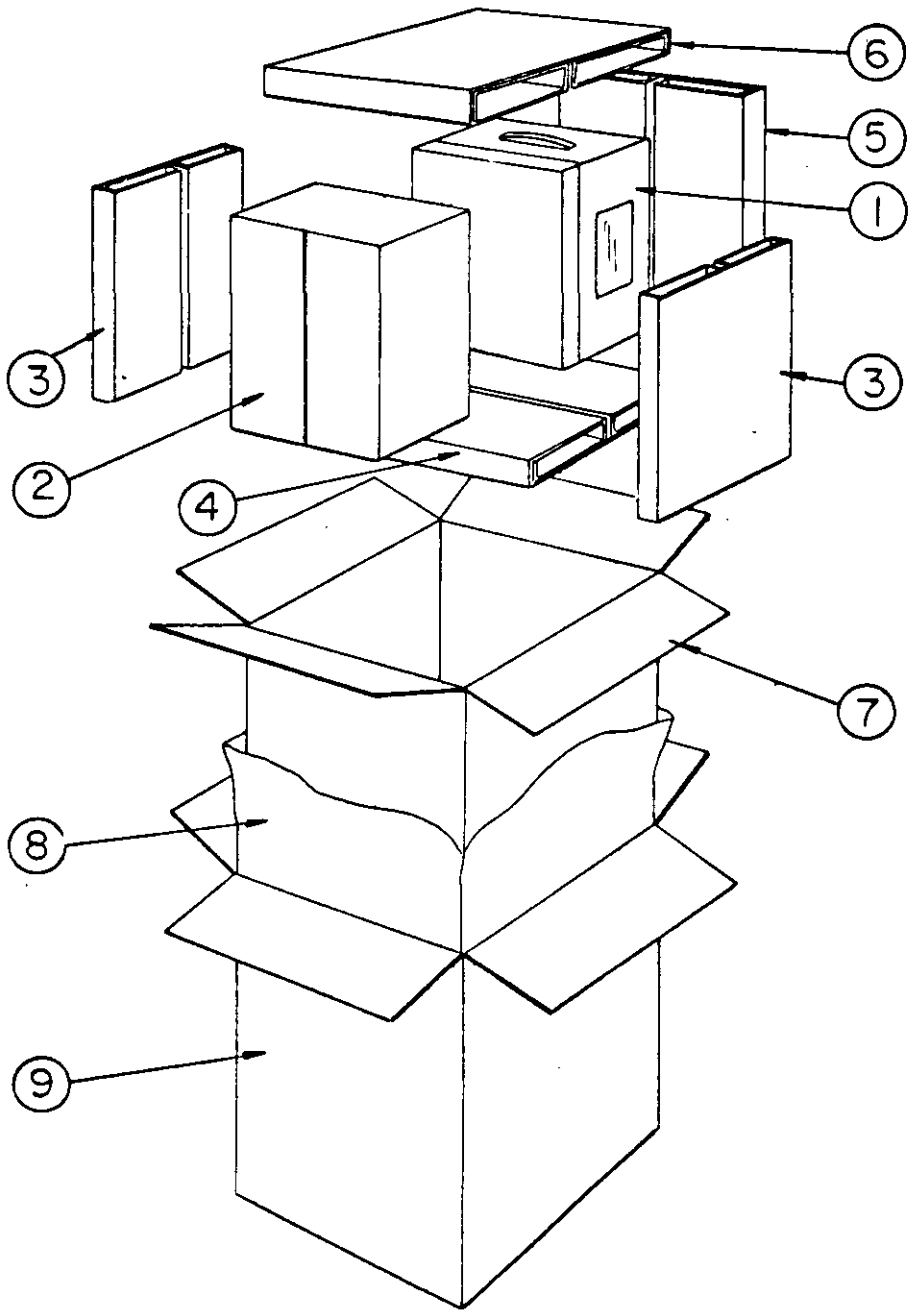


FIGURE 2. Control, Radio Set C-1429/SRC-8 or C-4184/SRC-8BZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

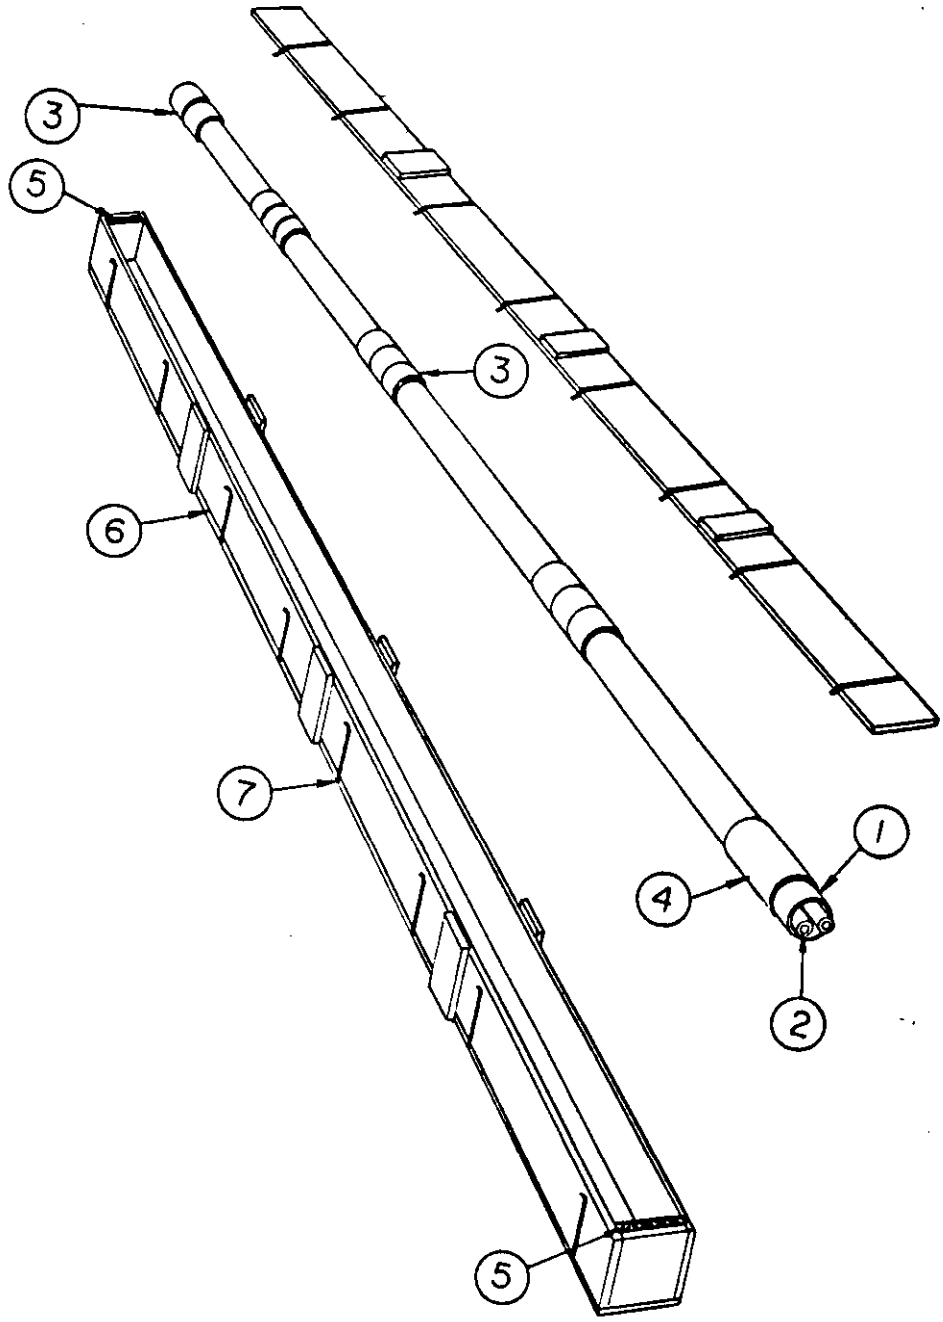


FIGURE 3. Antenna AT-609/SRC-8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

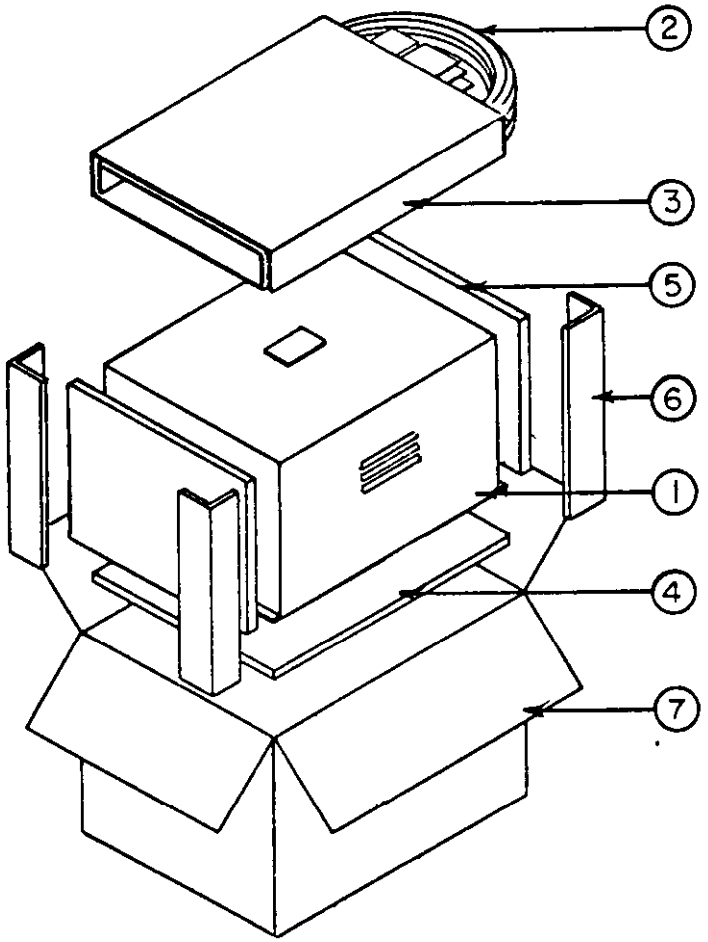


FIGURE 4. Converter-Dynamotor PU-283/SRC-8 or Converter-Dynamotor CV-522/SRC-8 or Power Supply PP-1055/SRC-8X or PP-3739/SRC-8AX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

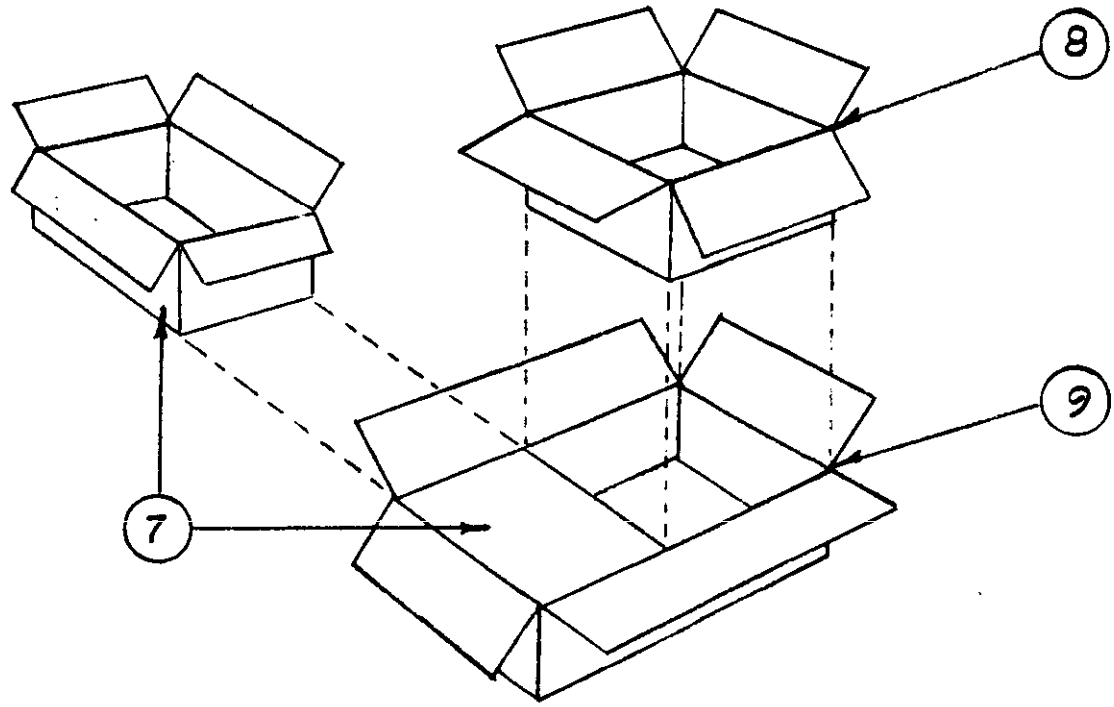


FIGURE 5. Consolidation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-49022A (CR)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPL[redacted]

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.