INCH POUND

MIL-S-21604/1A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/1(SHIPS)
5 September 1975

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 1 AMPERE, STYLES JF AND JFM

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-21604

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.


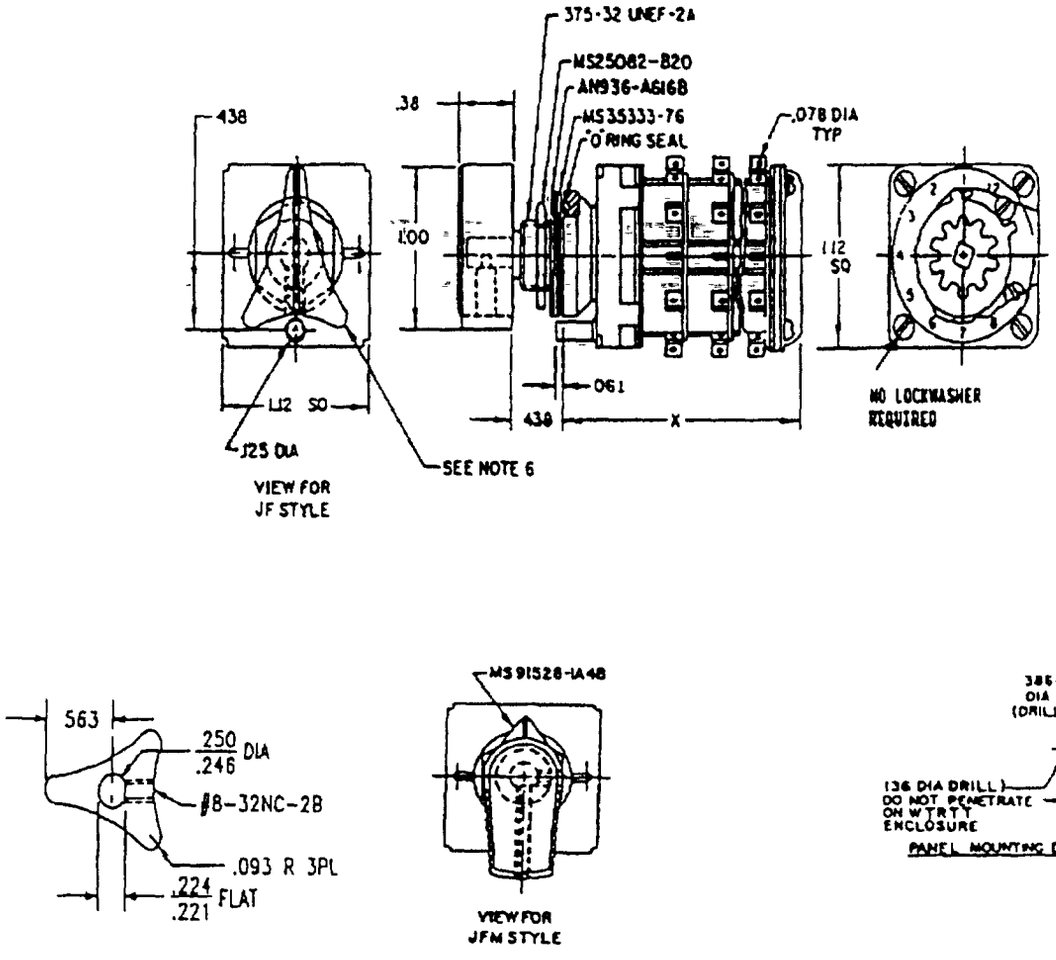


FIGURE 1 Style JF and JFM switch

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

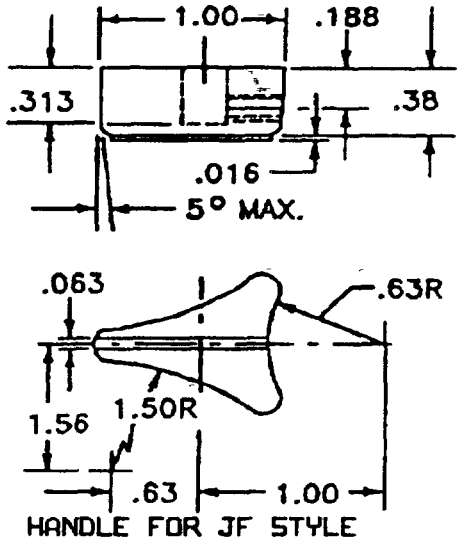


Inches	mm	Inches	mm
0.005	0.13	0.250	6.35
.016	.41	.313	7.95
.061	1.55		
.063	1.60	.38	9.65
.078	1.98	.386	9.80
.093	2.36	.438	11.12
.125	3.18	.563	14.30
.136	3.45	.63	16.00
.188	4 78	1.00	25.40
.221	5.61	1.12	28.45
.224	5.69	1.50	38.10
246	6.25	1.56	39 64

FIGURE 1. Style JF and JFM switch. Continued


NOTES.

1. Dimensions are in inches.
2. Metric equivalent (to the neares 0 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Unless otherwise specified, tolerances are plus or minus 0.016 (0 41 mm) for two-place decimals and plus or minus 0 005 (0 13 mm) for three-place decimals.
4. Type JFM switches shall be limited to three positions, (0 degrees and plus or minus 30 degrees) by a stop assembly located in the spring case. Either of the 30 degree positions can be eliminated by adjustment of the female gears in the rear stop shown on figure 1.
5. Type JFM switches shall be furnished with handle MS91528-1A4B, unless otherwise specified in the procurement document.
6. Brass with nickel finish

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

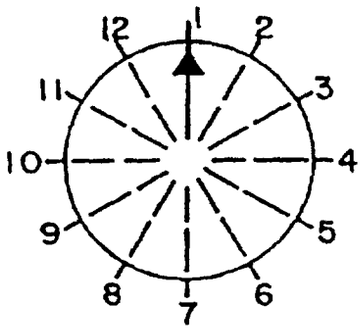


HANDLE POSITIONS

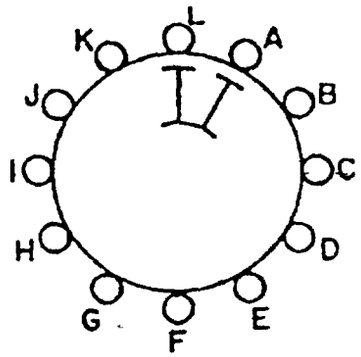


TYPICAL SECTION
SINGLE POLE

ROTOR DESIGNATION 1

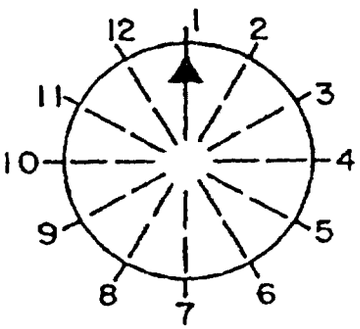

HANDLE POSITIONS

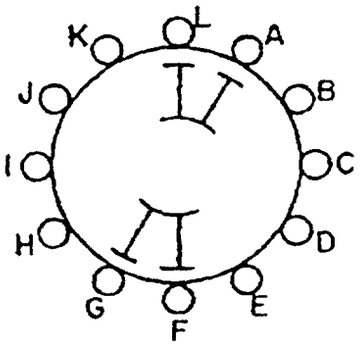

TYPICAL SECTION
DOUBLE POLE

ROTOR DESIGNATION 2

NOTE: Viewed from the handle end.

FIGURE 2. Rotor contact configuration and handle positions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration:	See figures 1 and 2 and table I.
Angle of throw:	30 degrees.
Switching action:	Detent (style JF), momentary (style JFM). These switches have single break contact action
Electrical loads:	Ac current: 1 ampere. Voltage: 125 volts (at 60 Hz, 0.5 power factor inductive)
Insulation:	Grade 4 of polychlorotrifluoroethylene (Kel-F) of ASTM D1430 or thermosetting plastic (except phenolic) of MIL-M-14.
Temperature rise:	15°F maximum.
Contact material:	Solid silver overlay on copper or copper alloy.
Stop torque:	35 inch-pounds.
Barriers:	See figure 1.
Terminal marking:	None
Stop marking:	See figure 1
Qualification samples.	See table II.
Operating shaft:	Berrylium copper.

TABLE I. Type designation and switching characteristics.

Type designation						
Component	Rotor designation 1/	Style	No of sections	Dimension "X" 2/ ± 062 (1 57)	Approx weight (ounces)	Max rotational torque (pound-inches)
S	1	JF	4	1 960 (49 78)	4 2	8
S	1	JF	5	2.250 (57.15)	4.4	8
S	2	JF	1	1.090 (27.69)	3.5	5
S	2	JF	2	1.380 (35.05)	3.7	5
S	2	JF	3	1 670 (42 42)	3.9	5
S	2	JF	4	1 960 (49.78)	4.2	8
S	2	JF	5	2.250 (57.15)	4.4	8
S	2	JFM	3	1.950 (49.53)	4.4	5
S	2	JFM	4	2 240 (56.90)	4.6	8
S	2	JFM	5	2.530 (64.26)	4.9	8

1/ For rotor designation, see figure 2.
2/ Dimensions are in inches Metric equivalents (to the nearest 0 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification test samples.

Sample switch	Test number 1/	Sample switch	Test number 2/
S1JF5	1	S2JFM5	1
S2JF5	2	S2JFM5	2
S1JF5	3	S2JFM5	3
S2JF5	4	S2JFM5	4
S2JF5	5	S2JFM5	5
S2JF5	6	S2JFM5	6

1/ Test numbers in accordance with table II of MIL-S-21604.
2/ For group qualification see 4.5.1.

Preparing activity:
Navy - SH
(Project 5930-N680-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.