INCH POUND

MIL-S-21604/2A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/2(SHIPS)
5 September 1975

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 5 AMPERE, STYLE JK

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-21604

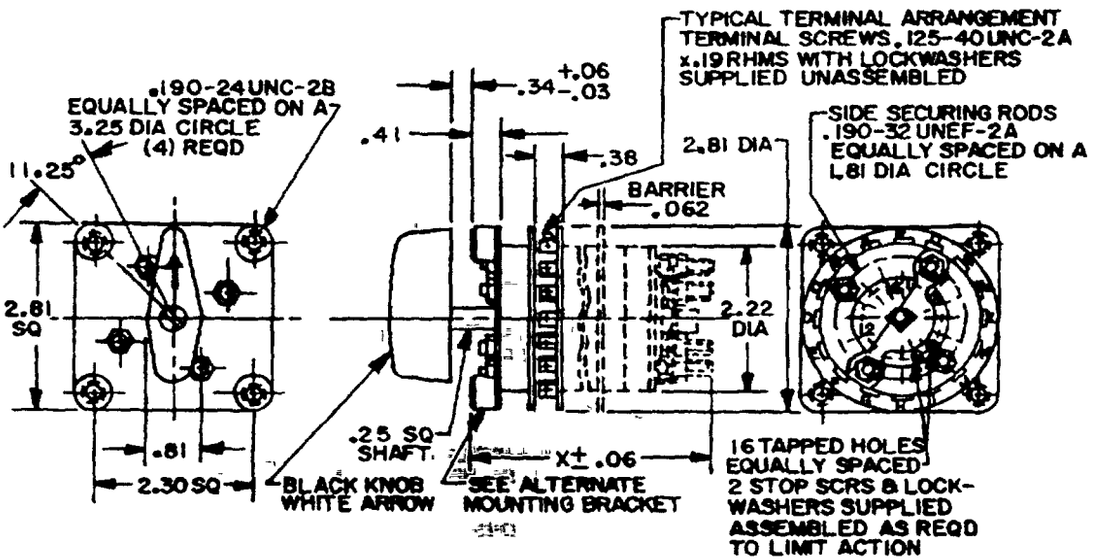
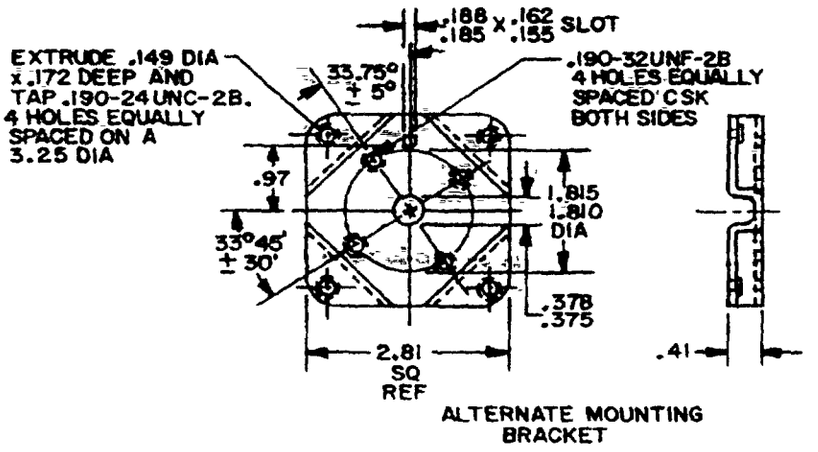


FIGURE 1 Style JK switch.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.



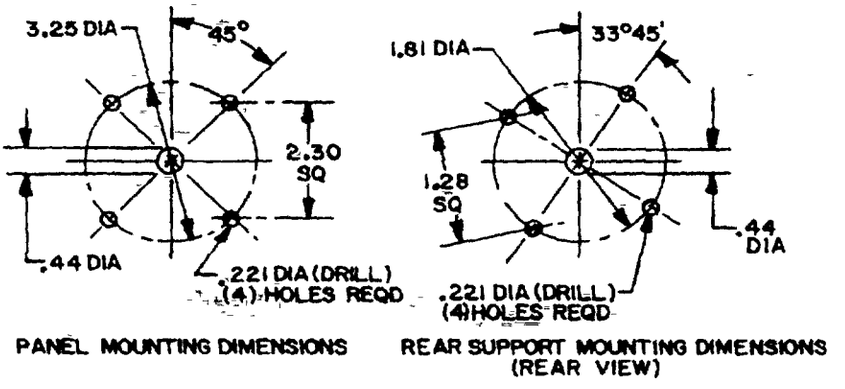


FIGURE 1 Style JK switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.


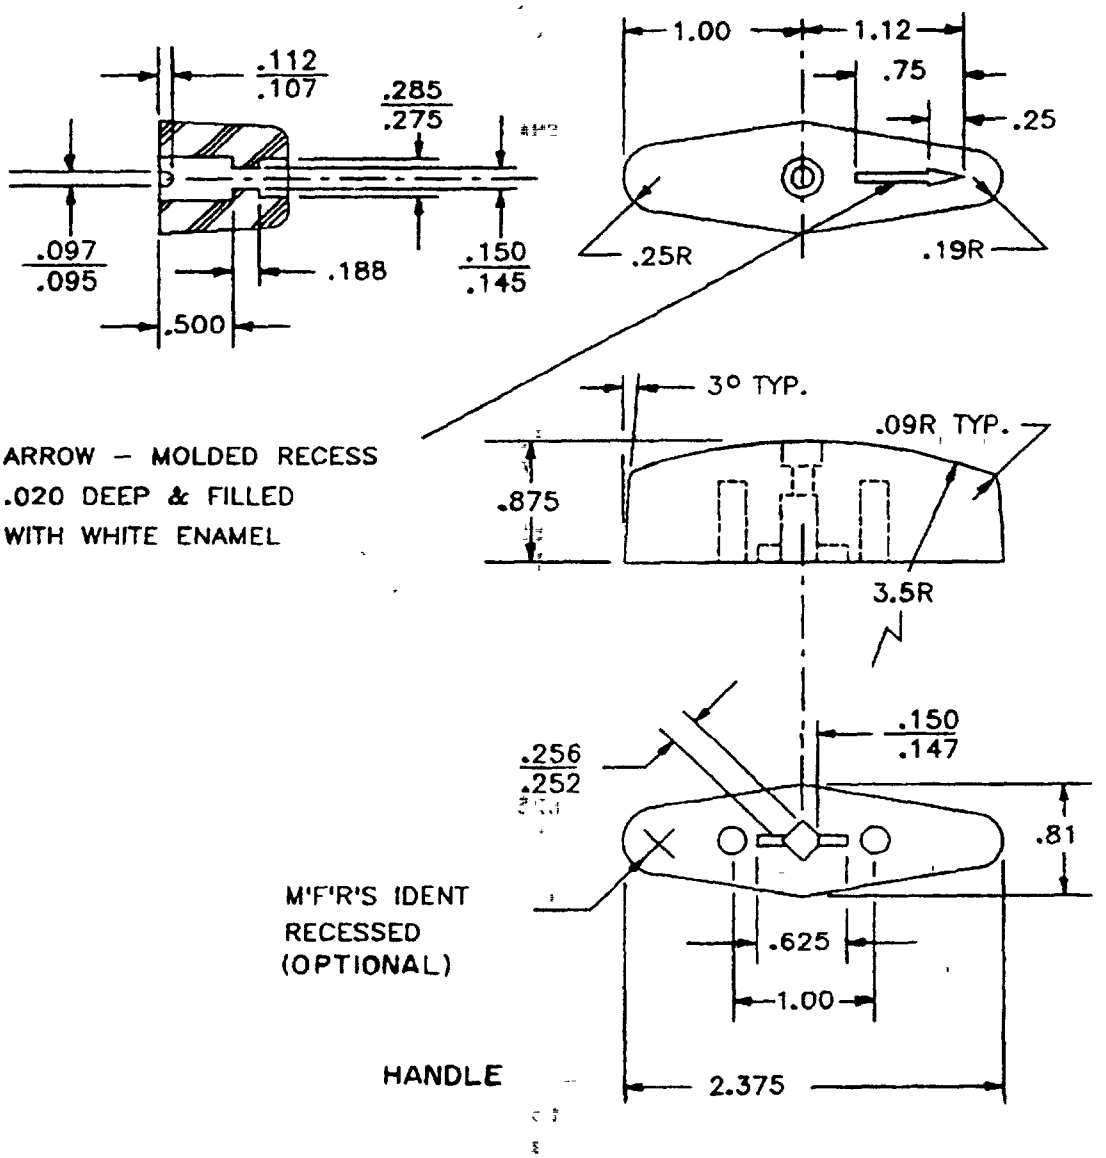


FIGURE 1. Style JK switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

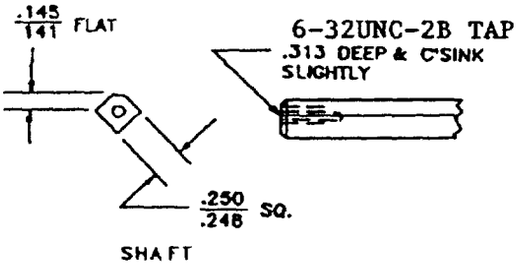


Inches	mm	Inches	mm	Inches	mm
0.005	0 13	0 253	6.43	97	24 64
.03	76	256	6.50	1.00	25.4
.06	1.52	.275	6.99	1.25	31 75
.090	2.29	.285	7.24	1.38	35 05
.095	2.41	.313	7.95	1.810	45 97
.097	2 46	34	8.64	1 815	46.10
.107	2.72	.375	9.52	2.22	56 39
.112	2.84	.378	9.60	2 30	58.42
.142	3.61	.39	9.91	2 375	60.33
.144	3.66	.41	10.41	2.38	60.45
.145	3.68	44	11.18	2 81	71.37
.147	3.73	.50	12.7	3.25	82.55
.150	3.81	.625	15.88		
.155	3 94	.75	19 05		
.162	4 11	81	20 57		
.18	4 57	.875	22.23		
.221	5 61	.88	22.35		
.248	6.30				
.25	6.35				

NOTES:


1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Unless otherwise specified, tolerances are plus or minus 0 016 (0 41 mm) for two-place decimals and plus or minus (0 13 mm) for three-place decimals.

FIGURE 1 Style JK switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

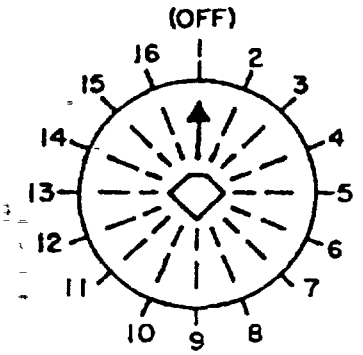

HANDLE POSITIONS

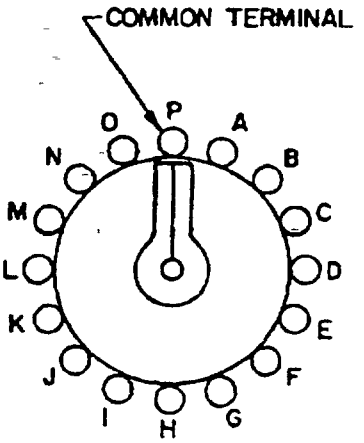

TYPICAL POSITIONS
SINGLE POLE
SELECTOR

ROTOR DESIGNATION 3

BREAK-BEFORE-MAKE CONTACTS

NOTE:
Viewed
from the
Handle end.

FIGURE 2. Rotor contact configuration and handle positions

REQUIREMENTS:

Dimensions and configuration:	See figures 1 and 2 and table I.
Angle of throw.	22 5 (degrees).
Switching action:	Detent.
Electrical loads·	Ac current: 5 ampere
Voltage:	125 volts (at 60 and 400 Hz, 0.80 inductive power factor)
Temperature rise:	30°C maximum.
Contact material:	Rotor Silver-overlay phosphor bronze. Stator: Silver-overlay copper
Barriers·	See figure 1.
Terminal marking	See figures 1 and 2.
Stop marking:	See figure 1.
Qualification samples:	See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

TABLE I Type designation and switching characteristics

Type designation						
Component	Rotor designation 1/	Style	No. of sections	Dimension "X" 2/ ± .062 (1.57)	Approx. weight (ounces)	Max. rotational torque (pound-inches)
S	3	JK	3	3.09 (78.49)	22	15
S	3	JK	5	3 81 (96 82)	28	20
S	3	JK	10	6.34 (161.14)	47	35
S	3	JK	15	8.50 (215.90)	56	40

1/ For rotor designation, see figure 2.
2/ Dimensions are in inches Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

TABLE II Qualification test samples.

Sample switch	Test number 1/	Sample switch	Test number
S3JK15	1	S3JK15	3
S3JK15	2	S3JK15	4
S3JK15	5	S3JK15	6

1/ Test numbers in accordance with table II of MIL-S-21604.

Preparing activity:
Navy - SH
(Project 5930-N680-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.