INCH-POUND
MIL-DTL-21604/2C
27 March 2009
SUPERSEDING
MIL-DTL-21604/2B
27 June 2003

DETAIL SPECIFICATION SHEET

# SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 5 AMPERE, STYLE JK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-DTL-21604.


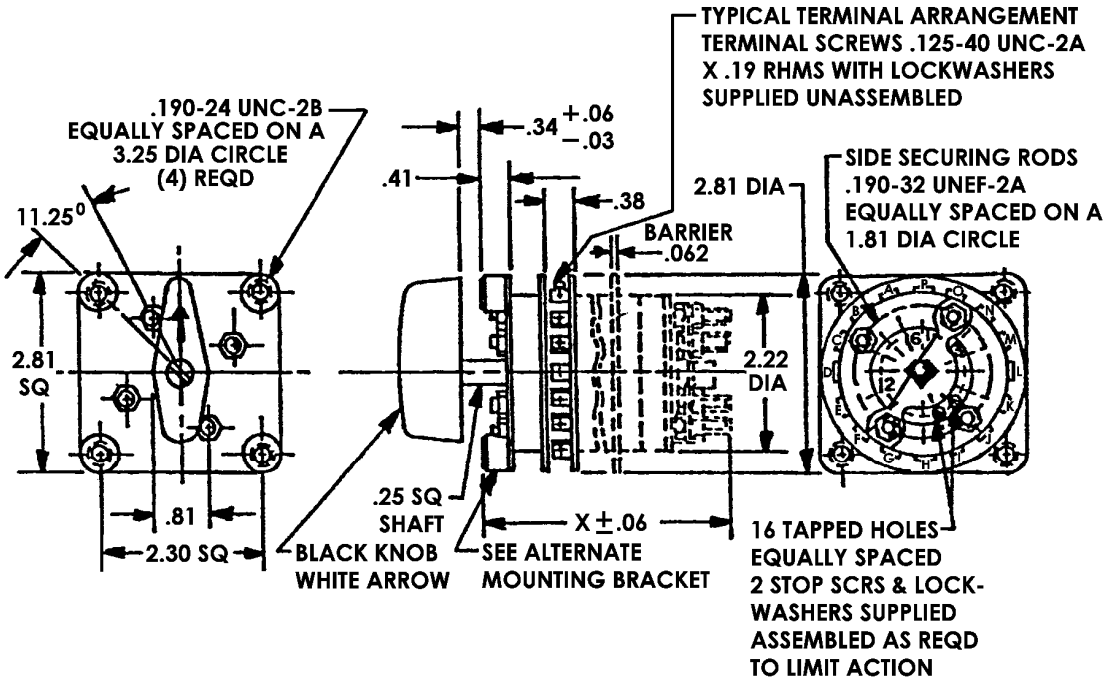



FIGURE 1. Style JK switch.

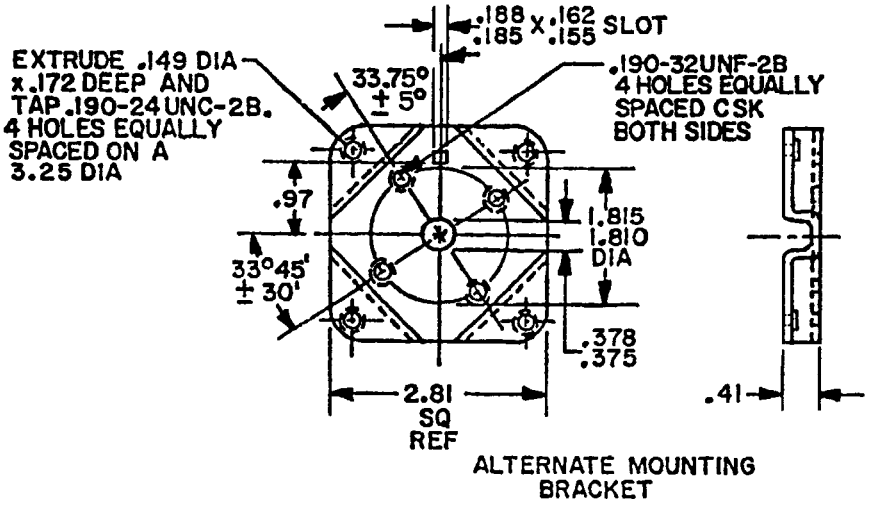

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.



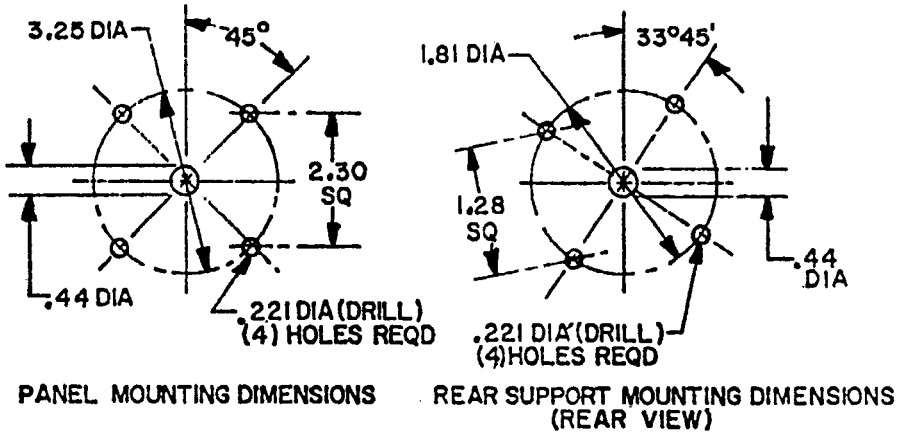




FIGURE 1. Style JK switch - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.


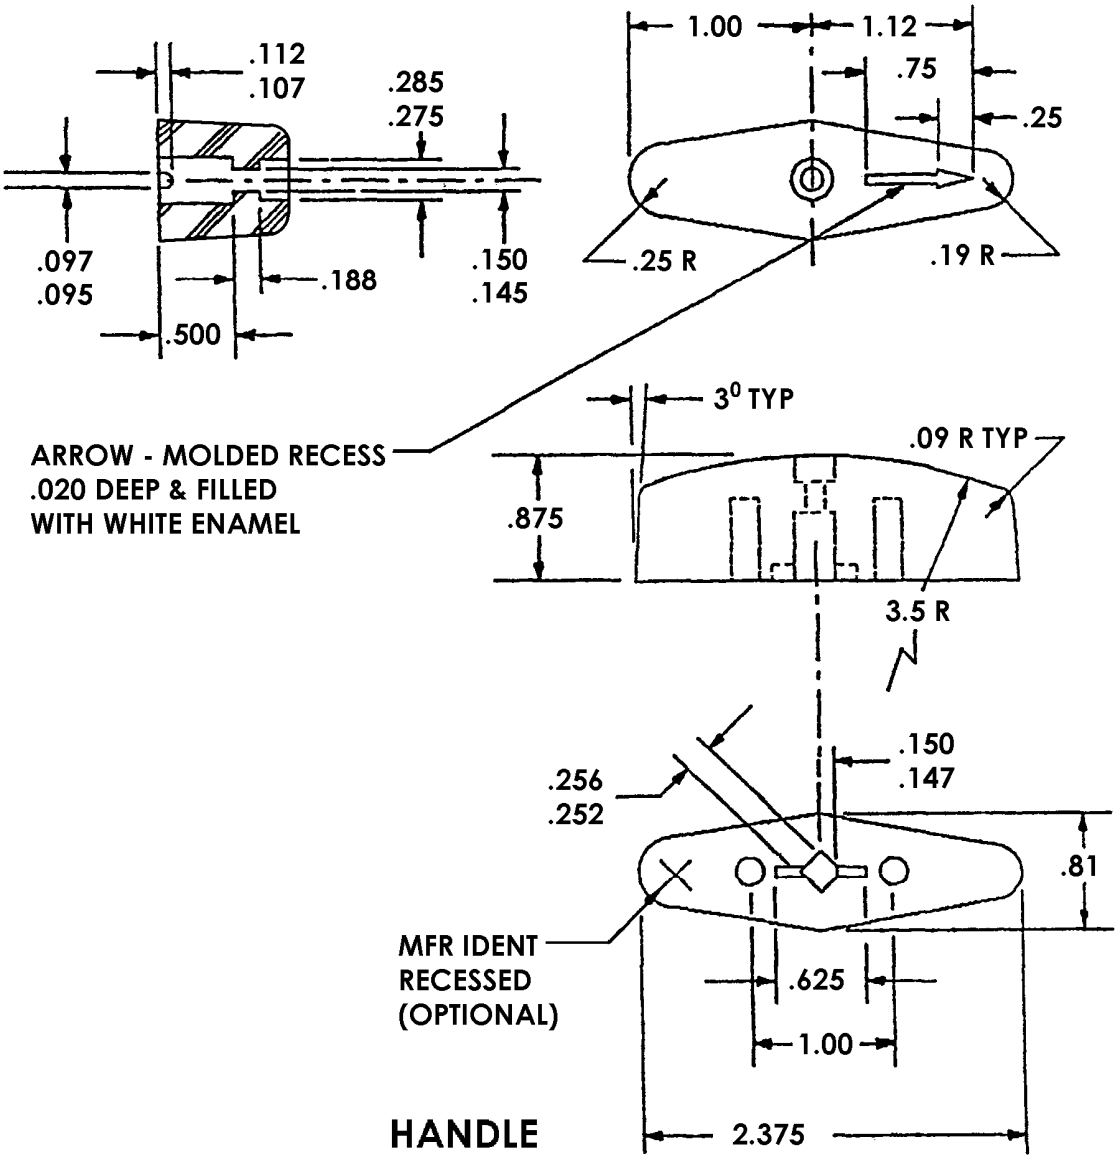



FIGURE 1. Style JK switch - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

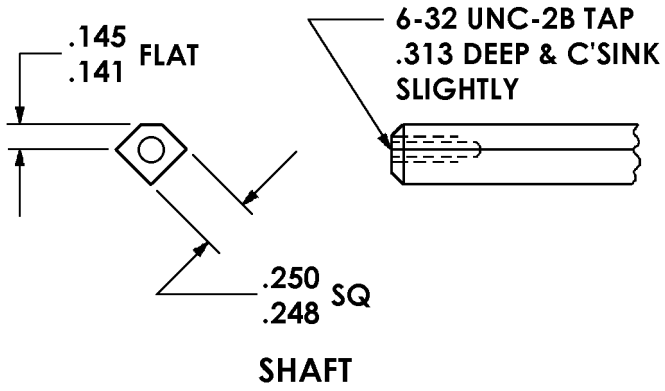


| Inch | mm | Inch | mm | Inch | mm | Inch | mm |
|---|---|---|---|---|---|---|---|
| .03 | 0.76 | .150 | 3.81 | .252 | 6.40 | .75 | 19.1 |
| .06 | 1.52 | .155 | 3.94 | .256 | 6.50 | .81 | 20.6 |
| .062 | 1.57 | .162 | 4.11 | .275 | 6.99 | .875 | 22.23 |
| .09 | 2.29 | .172 | 4.37 | .285 | 7.25 | .97 | 24.64 |
| .095 | 2.41 | .181 | 4.60 | .313 | 7.95 | 1.00 | 25.4 |
| .097 | 2.46 | .185 | 4.70 | .34 | 8.64 | 1.810 | 45.97 |
| .107 | 2.72 | .188 | 4.77 | .375 | 9.52 | 1.815 | 46.10 |
| .112 | 2.84 | .19 | 4.8 | .378 | 9.60 | 2.22 | 56.39 |
| .125 | 3.18 | .190 | 4.83 | .38 | 9.7 | 2.30 | 58.42 |
| .141 | 3.58 | .221 | 5.61 | .41 | 10.4 | 2.375 | 60.33 |
| .145 | 3.66 | .248 | 6.30 | .44 | 11.2 | 2.81 | 71.37 |
| .147 | 3.68 | .250 | 6.35 | .500 | 12.70 | 3.25 | 82.55 |
| .149 | 3.73 | .25 | 6.4 | .625 | 15.88 | 3.5 | 88.9 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .016 (0.41 mm) for two-place decimals and ± .005 (0.13 mm) for three-place decimals.

FIGURE 1. Style JK switch - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

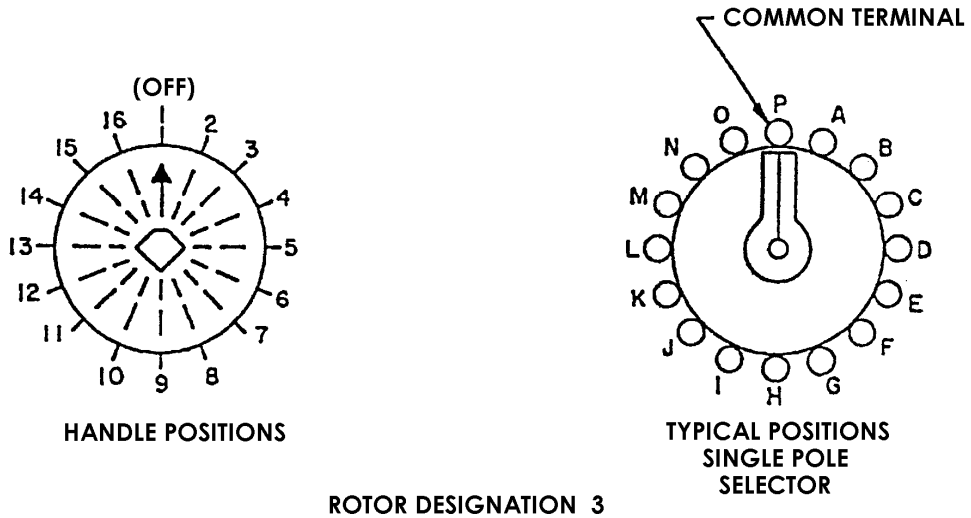



FIGURE 2. Rotor contact configuration and handle positions.

REQUIREMENTS:

Dimensions and configuration: See figure 1, figure 2, and table I.

Angle of throw: 22.5 (degrees).

Switching action: Detent.

Electrical loads: AC current: 5 ampere.

Voltage: 125 volts (at 60 and 400 Hz, 0.80 inductive power factor).

Temperature rise: 30°C maximum.

Contact material:
Rotor: Silver-overlay phosphor bronze.
Stator: Silver-overlay copper.

Barriers: See figure 1.

Terminal marking: See figure 1 and figure 2.

Stop marking: See figure 1.

Qualification samples: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and switching characteristics.

| Type designation | | Style | Number of sections | Dimension "X" 2/ ± .062 inch (1.57 mm) | Approximate weight (ounces) | Maximum rotational torque (inch-pounds) |
|---|---|---|---|---|---|---|
| Component | Rotor designation 1/ | | | | | |
| S | 3 | JK | 3 | 3.09 ( 78.49) | 22 | 15 |
| S | 3 | JK | 5 | 3.81 ( 96.82) | 28 | 20 |
| S | 3 | JK | 10 | 6.34 (161.14) | 47 | 35 |
| S | 3 | JK | 15 | 8.50 (215.90) | 56 | 40 |

1/ For rotor designation, see figure 2.
2/ Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

TABLE II. Qualification test samples.

| Sample switch | Test number 1/ | Sample switch | Test number |
|---|---|---|---|
| S3JK15 | 1 | S3JK15 | 3 |
| S3JK15 | 2 | S3JK15 | 4 |
| S3JK15 | 5 | S3JK15 | 6 |

1/ Test numbers in accordance with table II of MIL-DTL-21604.

The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference Documents:
MIL-DTL-21604

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2009-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:01Z
Check the source to verify that this is the current version before use.