INCH POUND

MIL-S-21604/3B(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/3A(SH)
10 July 1985

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 5 AMPERE,

STYLE JL

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-21604

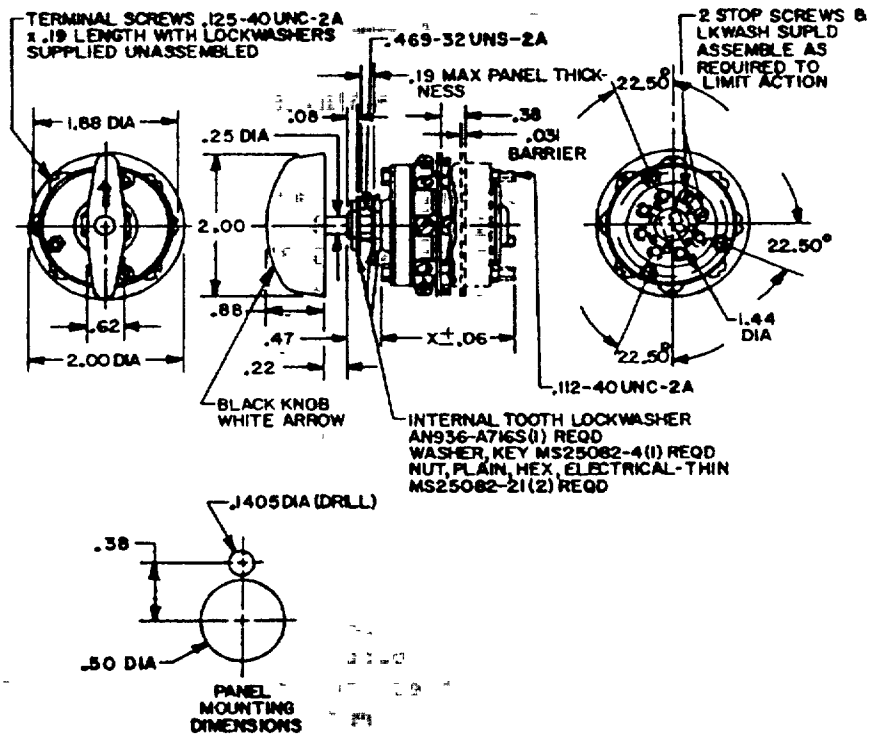



FIGURE 1. Style JL switch.

B denotes changes

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

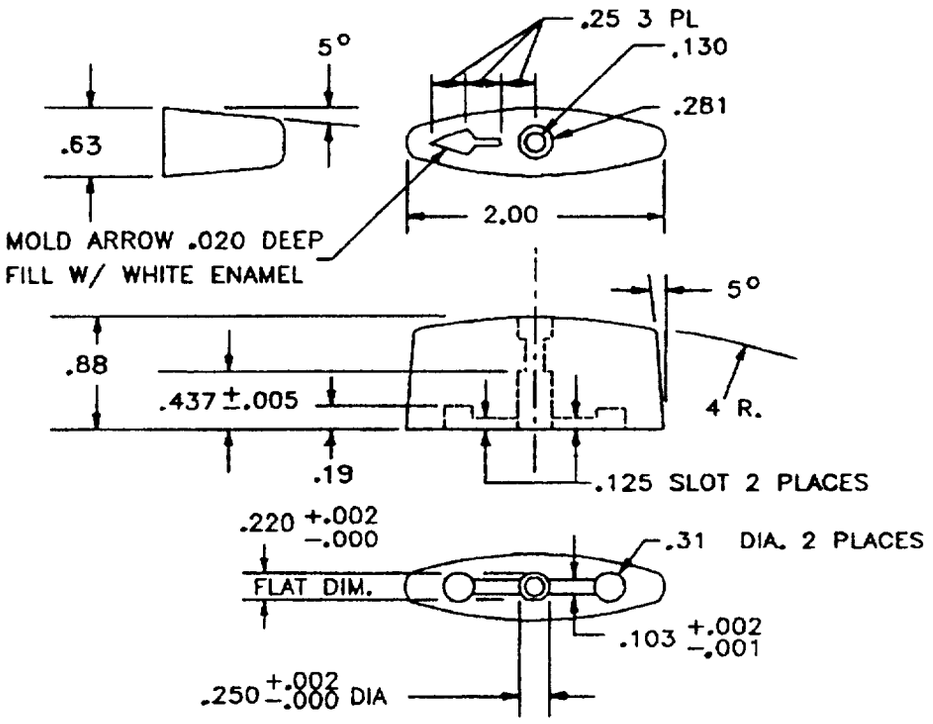

HANDLE


Inches	mm	Inches	mm	Inches	mm
0.001	0.03	0.125	3.18	.47	11 94
.002	.05	.130	3 30	.50	12.70
.003	08	.188	4.78	.625	15 88
.005	13	.22	5.59	.875	22 23
.02	.51	25	6 35	1.44	36 58
.06	1 52	.281	7.14	1 88	47 75
.062	1.57	.313	7.95	2.00	50 80
08	2 03	.38	9.65		
103	2 62	437	11 10		

NOTES:


1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.016 (0.41 mm) for two-place decimals and plus or minus 0.005 (0 13 mm) for three-place decimals
4. On switches of 6 to 10 sections, the securing rods shall extend 0.50 inch (12.70 mm) beyond the hex nuts at the rear of the switches to facilitate attachment to rear supports. A hex nut and lockwasher shall be provided for each extension rod

FIGURE 1. Style JL switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.




HANDLE POSITIONS

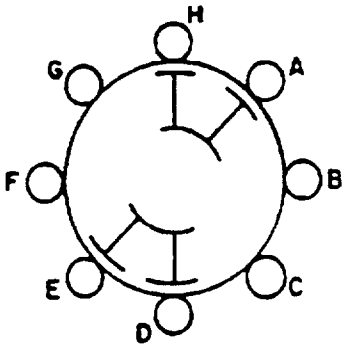


TYPICAL SECTION
DOUBLE POLE
DOUBLE BREAK

ROTOR DESIGNATION 2



HANDLE POSITIONS

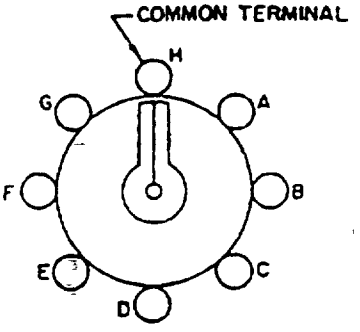


TYPICAL SECTION
SINGLE POLE
SELECTOR

ROTOR DESIGNATION 3


Note: Viewed from handle end

FIGURE 2. Rotor contact configuration and handle positions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

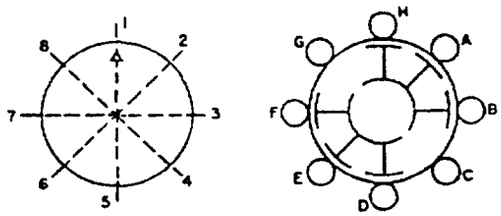

1/ W
I
T
H ROTOR CONFIGURATION 4, CONTACT H-1
BREAKS BEFORE C-3 MAKES, AND
CONTACTS A-1 AND B-1 MAKE
BEFORE A-2 AND B-3 MAKE



NOTE Viewed from the Handle end

FIGURE 2 Rotor contact configuration and handle positions Continued

REQUIREMENTS:

Dimensions and configuration	See figures 1 and 2 and table I
Angle of throw	45 degrees
Switching action	Detent
Electrical loads	Ac current· 5 ampere Voltage 125 volts (at 60 and 400 Hz, 0 80 inductive power factor)
Temperature rise	15°C maximum.
Contact material	Rotor Silver-overlay phosphor bronze. Stator Silver-overlay copper
Stop Torque	30 inch-pounds
Barriers	See figure 1
Terminal marking	Adjacent to terminals on switch section
Stop marking	See figure 1
Qualification samples	See table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

TABLE I Type designation and switching characteristics.

Type designation						
Component	Rotor designation 1/	Style	No. of sections	Dimension "X" 2/ ± .062 (1.57)	Approx. weight (ounces)	Max rotational torque (pound-inches)
S	2	JL	3	1.91 (48.41)	8	9
S	2	JL	5	2.66 (67.46)	10	11
S	2	JL	10	5.28 (134.14)	16	16
S	3	JL	3	1.91 (48.41)	8	9
S	3	JL	5	2.66 (67.46)	10	11
S	3	JL	10	5.28 (134.14)	16	16
S	4	JL	3	1 91 (48.41)	8	9
S	4	JL	5	2 66 (67.46)	10	15
S	4	JL	10	5.28 (134.14)	16	20

1/ For rotor designation, see figure 2
2/ Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

TABLE II. Qualification test samples.

Sample switch	Test number 1/	Sample switch	Test number
S2JL10	1	S3JL10	4
S2JL10	2	S4JK10	1
S3JL10	3	S4JL10	2
S2JL10	4	S4JL10	3
S3JL10	1	S4JL10	4
S3JL10	2	S4JL10	5
S3JL10	3	S4JL10	6

1/ Test numbers in accordance with table II of MIL-S-21604.

Preparing activity:
Navy - SH
(Project 5930-N680-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.