INCH POUND

MIL-S-21604/4A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/4(SHIPS)
5 September 1975

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 7-1/2 AMPERE,

STYLE JM

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that isue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-21604

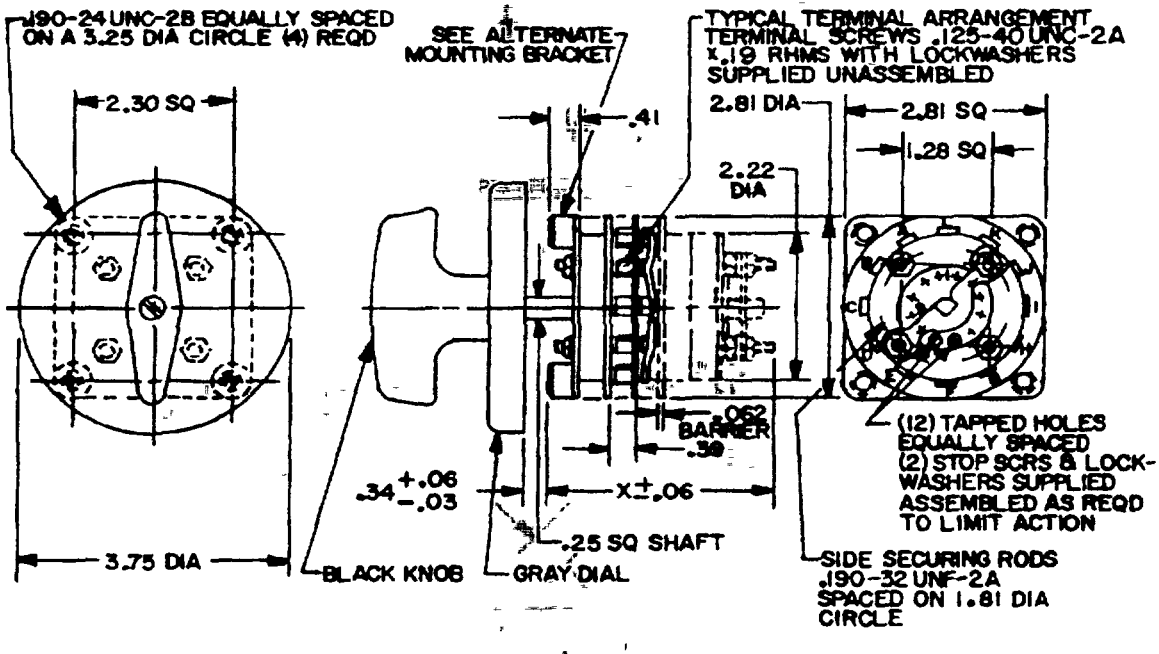


Figure 1. Style JM switch.

AMSC N/A
FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

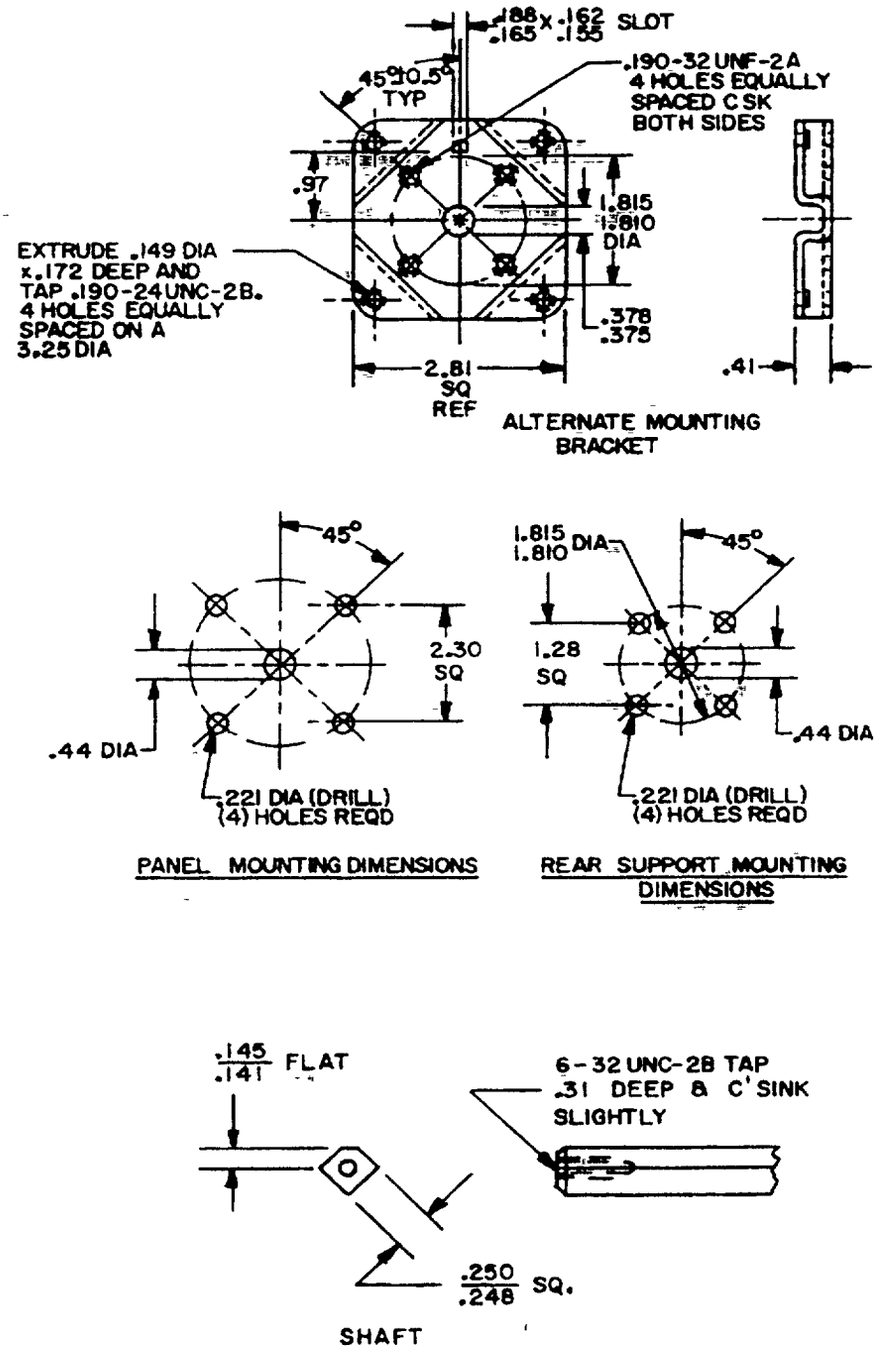


FIGURE 1. Style JM switch Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.


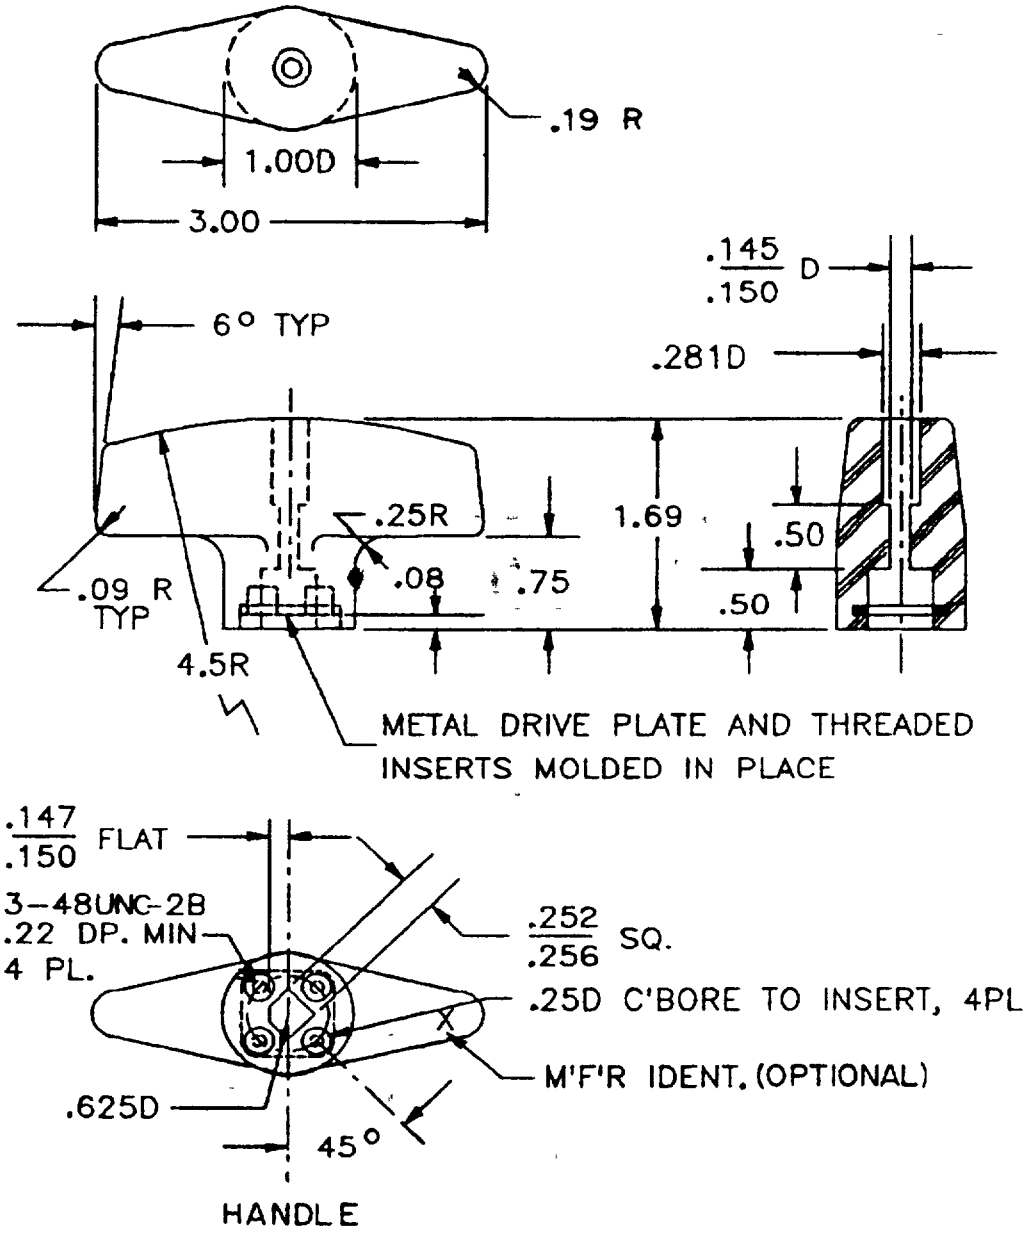


FIGURE 1. Style JM switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

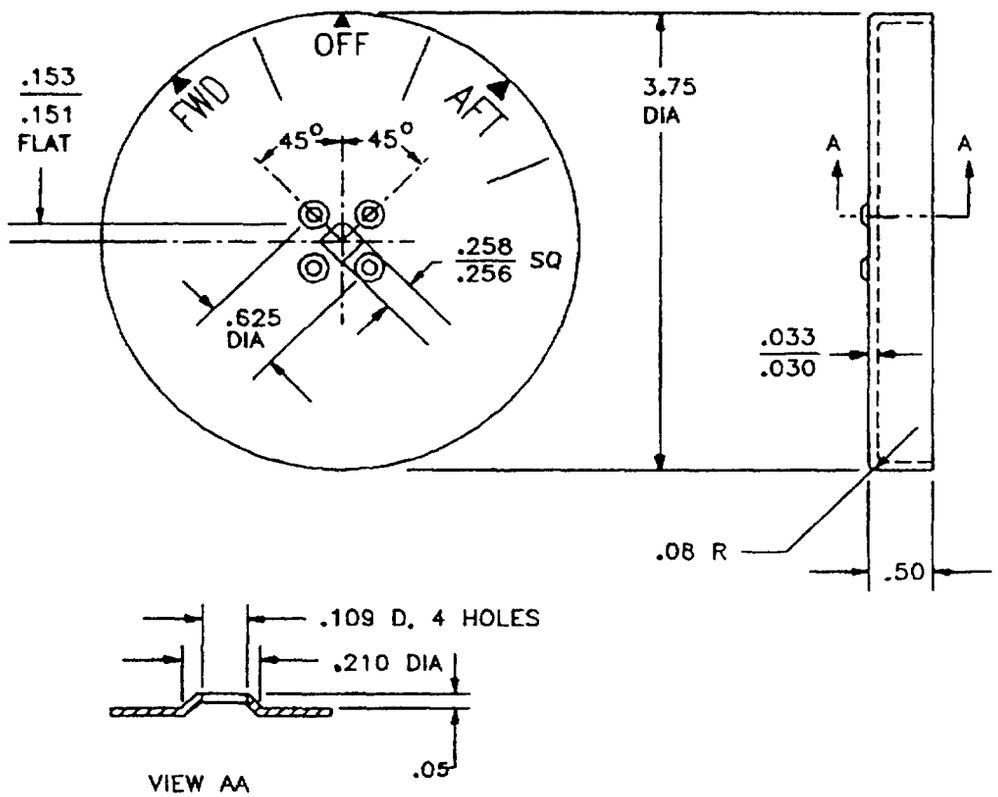

DIAL

Inches	mm	Inches	mm	Inches	mm
0 005	0.13	0 162	4.11	0.50	12.70
03	.76	.285	4.70	.625	15.88
033	.84	188	4 78	.75	11.43
047	1 19	.210	5 33	97	24 64
.06	1.52	22	5.59	1.00	25.40
.078	1.98	248	6.30	1.28	32 51
.08	2.03	25	6.35	1 69	42.93
.093	2.36	.251	6.38	1.81	45.97
.109	2.77	.253	6.43	1.815	46.10
.142	3.61	.256	6.50	2.22	56.39
144	3 66	258	6 55	2.30	58.42
.145	3 68	313	7 95	2.81	71.37
.146	3.71	34	8.64	3 00	76.20
.148	3 76	.375	9.52	3.25	82.55
150	3 81	378	9 60	3.75	95.25
151	3.84	39	9 91	4 50	114.30
.153	3 89	41	10 41		
.155	3.94	44	11.18		

Figure 1 Style JM Switch - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

NOTES:


1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.016 (0.41 mm) for two-place decimals and plus or minus 0.005 (0.13 mm) for three-place decimals.
4. On switches of 20 sections or more, the securing rods shall extend 0.50 inch (12.70 mm) beyond the hex nuts at the rear of the switches to facilitate attachment to rear supports. A hex nut and lockwasher shall be provided for each rod extension
5. Dial marking, when required, shall be as specified in MIL-S-21604 (see 6.2).

FIGURE 1. Style JM switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.




HANDLE POSITIONS




TYPICAL SECTION
DOUBLE POLE
DOUBLE BREAK

BREAK BEFORE MAKE CONTACTING

ROTOR DESIGNATION 2




HANDLE POSITIONS

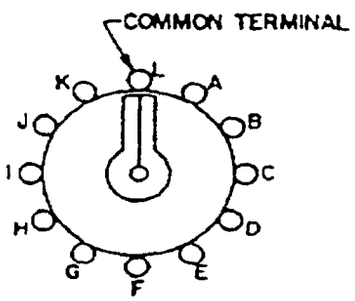


TYPICAL SECTIONS
SINGLE POLE
SELECTOR

BREAK BEFORE MAKE CONTACTING

ROTOR DESIGNATION 3



HANDLE POSITIONS



TYPICAL SECTION

Note: Viewed from the handle end

Break before making Contacting

Rotor Designation 5

FIGURE 2 Rotor contact configuration and handle positions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figures 1 and 2 and table I.
Angle of throw: 30 degrees.
Switching action: Detent.
Electrical loads: Ac current: 7 1/2 amperes.
Voltage: 125 volts (at 60 and 400 Hz, 0.80 inductor power factor).
Temperature rise: 30° maximum.
Contact material: Rotor: Sivler-overlay phosphor Bronze.
Stator: Silver-overlay copper.
Barriers: See figure 1.
Terminal marking: See figures 1 and 2.
Stop marking: See figure 1
Qualification samples: See table II.

Table I Type designation and switching characteristics.

Type designation						
Component	Rotor designation 1/	Style	No of sections	Dimension "X" 2/ ± 062 (1 57)	Approx weight (ounces)	Max. rotational torque (pound-inches)
S	2	JM	5	3.81 (96.82)	25	20
S	2	JM	10	5 75 (146.05)	40	25
S	2	JM	15	8.09 (205.59)	59	45
S	2	JM	20	10.41 (264.31)	75	50
S	2	JM	25	12 34 (313.54)	90	55
S	3	JM	5	3.81 (96.82)	25	20
S	3	JM	10	5.75 (146.05)	40	25
S	3	JM	15	8 09 (205.59)	59	45
S	3	JM	20	10 41 (264.31)	75	50
S	3	JM	25	12 34 (313.54)	90	55
S	5	JM	5	3.81 (96.82)	25	20
S	5	JM	10	5.75 (146.05)	40	25
S	5	JM	15	8.09 (205.59)	59	45
S	5	JM	20	10.41 (264.31)	75	50
S	5	JM	25	12 34 (313.54)	90	55

1/ For rotor designation, see figure 2.
2/ Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification test samples.

Sample switch	Test number 1/	Sample switch	Test number
S2JM25	1	S3JM25	4
S2JM25	2	S5JM25	1
S2JM25	3	S5JM25	2
S2JM25	4	S5JM25	3
S3JM25	1	S5JM25	4
S3JM25	2	S5JM25	5
S3JM25	3	S5JM25	6

1/ Test numbers in accordance with table II of MIL-S-21604

Preparing activity:
Navy - SH
(Project 5930-N680-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.