INCH POUND

MIL-S-21604/5A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/5(SHIPS)
5 September 1975

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 10 AMPERE, STYLE JR

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-S-21604


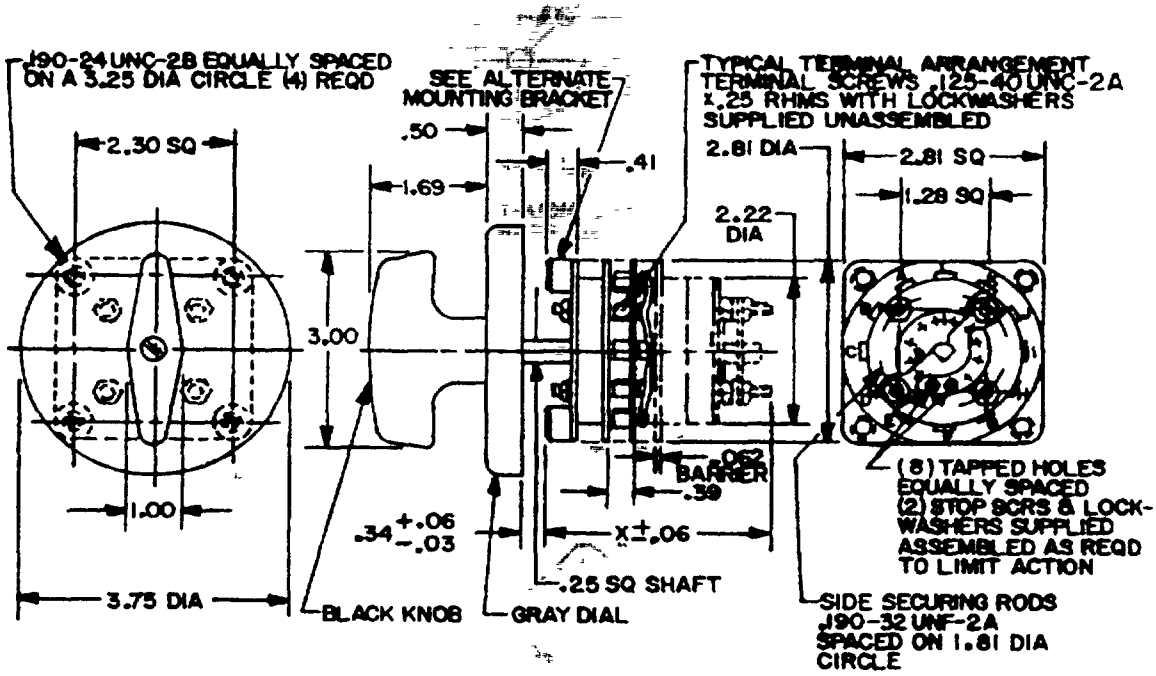



FIGURE 1 Style JR switch

AMSC N/A FSC 5930


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

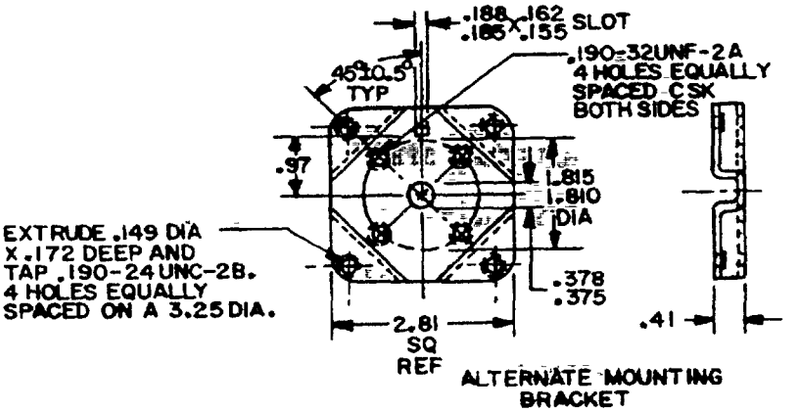

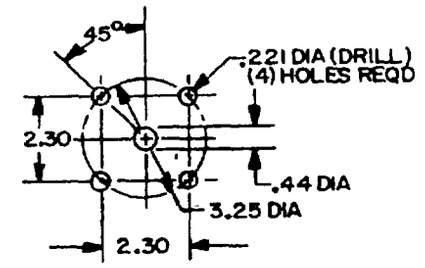

PANEL MOUNTING DIMENSIONS
AND REAR SUPPORT

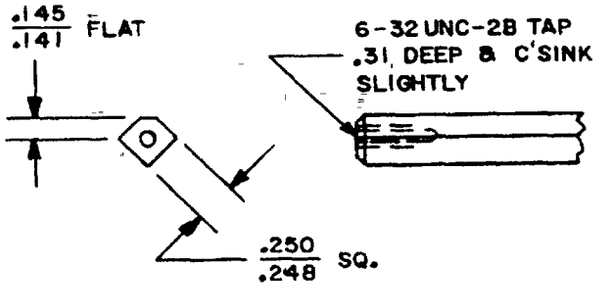

SHAFT

FIGURE 1 Style JR switch Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.


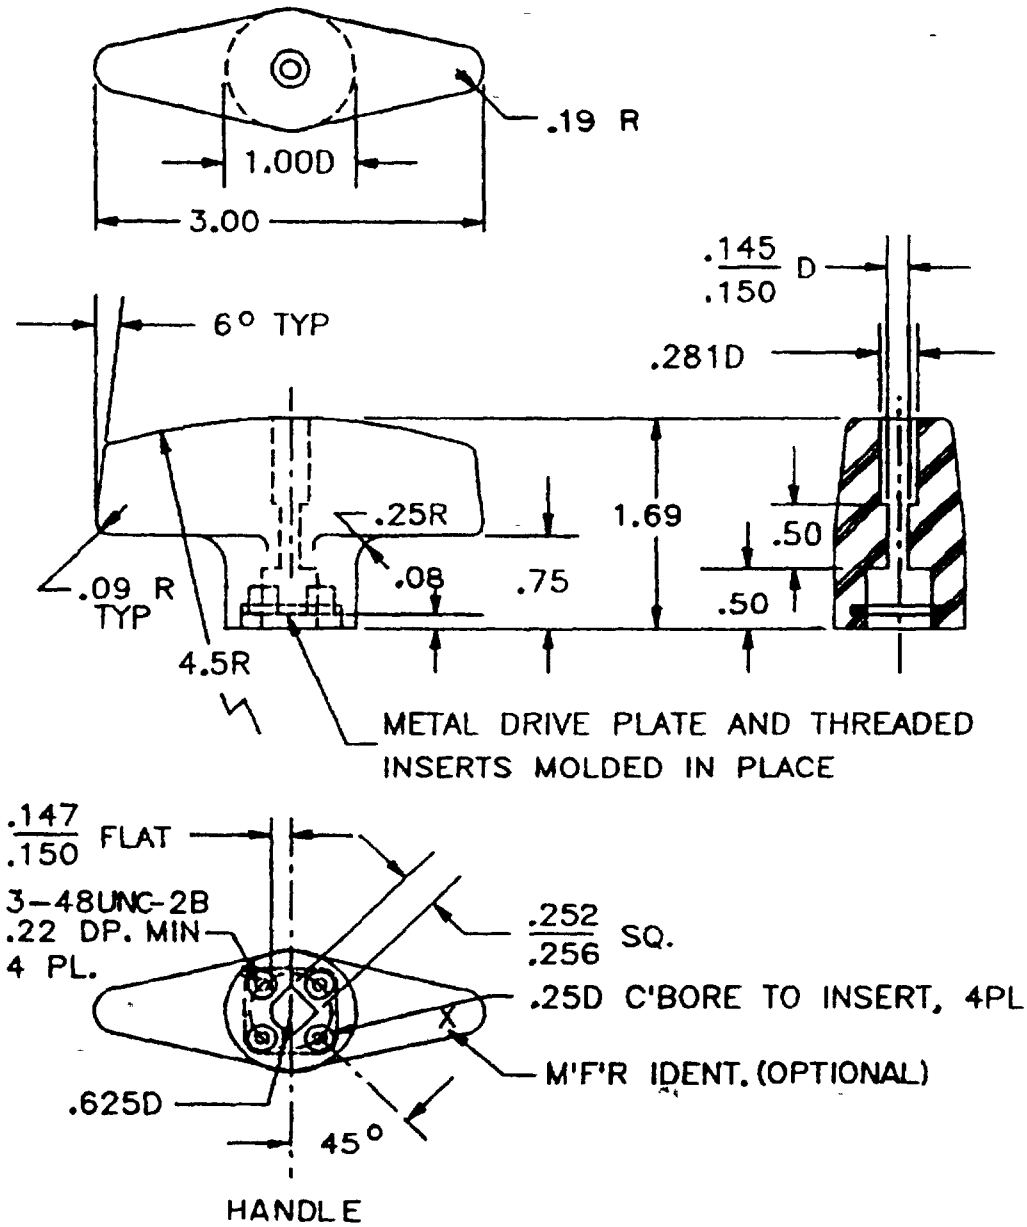


FIGURE 1. Style JR switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

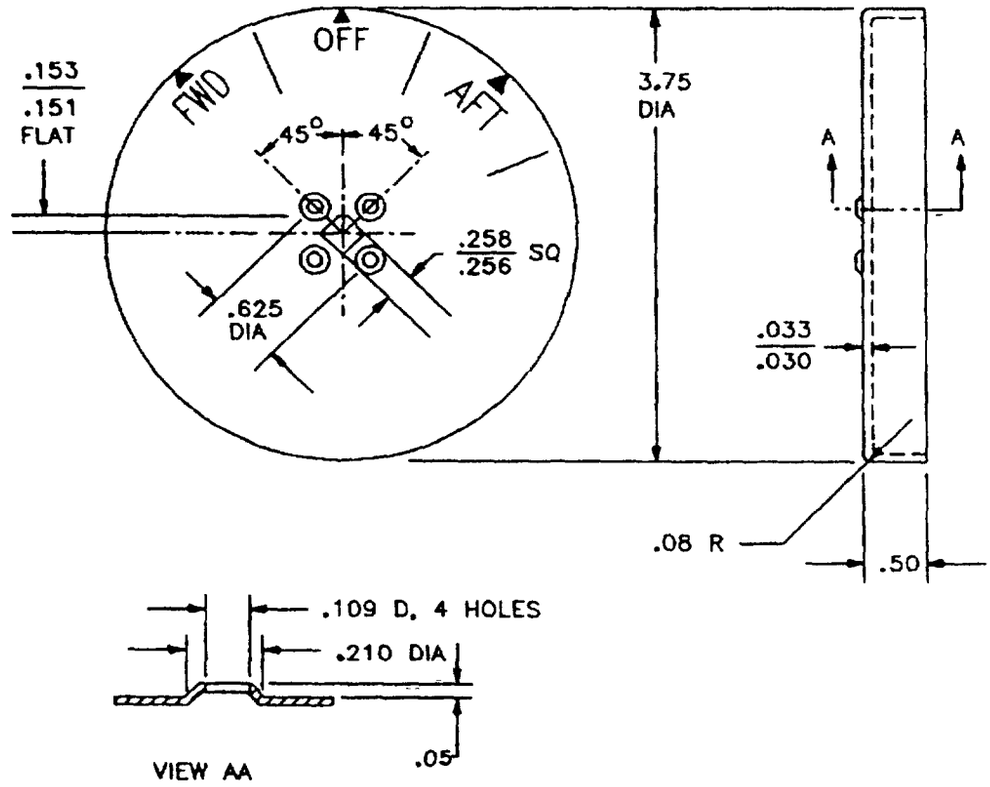

DIAL

Inches	mm	Inches	mm	Inches	mm
0 005	0.13	0 162	4.11	0.50	12 70
03	.76	169	4.29	.625	15 88
.033	.84	185	4.70	.75	11.43
.047	1.19	.188	4 78	.97	24 64
.06	1 52	210	5.33	1 00	25.40
.078	1.98	.22	5.59	1.28	32 51
.08	2 03	.221	5.61	1.69	42 93
.093	2.36	.248	6.30	1.81	45.97
.109	2 77	25	6.35	1 815	46 10
.142	3.61	.251	6.38	2.22	56 39
.144	3.66	.253	6.43	2.30	58 42
.145	3.68	.256	6.50	2.81	71 37
.146	3.71	.258	6.55	3.00	76 20
148	3 76	281	7.14	3 25	82.55
.150	3.81	.313	7.95	3.75	95 25
.151	3.84	34	8 64	4.50	114.30
.153	3 89	375	9.52		
155	3 94	378	9 60		
		38	9.65		
		41	10.41		


FIGURE 1 Style JR switch Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.


NOTES.

1. Dimensions are in inches
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.016 (0.41 mm) for two-place decimals and plus or minus 0.005 (0.13 mm) for three-place decimals.
4. On switches of 20 sections or more, the securing rods shall extend 0.50 inch (12.70 mm) beyond the hex nuts at the rer of the switches to facilitate attachment to rear supports. A hex nut and lockwasher shall be provided for each rod extension
5. Dial marking, when specified, shall be as specified in MIL-S-21604 (see 6.2).

FIGURE 1 Style JR switch Continued




HANDLE POSITIONS




TYPICAL SECTION
SINGLE POLE
DOUBLE BREAK

ROTOR DESIGNATION 1



HANDLE POSITIONS




TYPICAL SECTION
DOUBLE POLE
DOUBLE BREAK

ROTOR DESIGNATION 2


NOTE: Viewed from the Handle end

FIGURE 2 Rotor contact configuration and handle positions

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

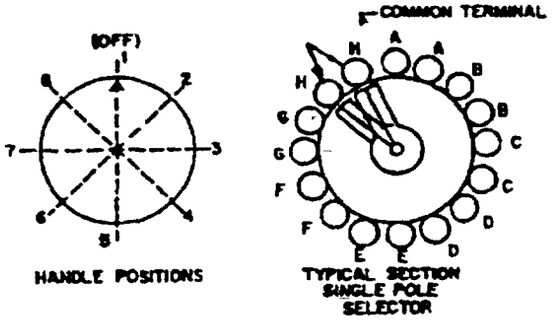

1/ WITH ROTOR CONFIGURATION 4, CONTACT H-1 BREAKS BEFORE C-3 MAKES, AND CONTACTS A-1 AND B-2 MAKE BEFORE A-2 AND B-3 BREAK



Note: Viewed from handle end.

FIGURE 2. Rotor contact configuration and handle positions Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figures 1 and 2 and table I.
Angle of throw:	45 degrees
Switching action:	Detent.
Electrical loads:	Ac current: 10 amperes. Voltage: 125 volts (at 60-400 Hz, 0.80 inductive power factor).
Temperature rise:	30° maximum.
Contact material:	Rotor: Sivler-overlay phosphor Bronze Stator: Silver-overlay copper.
Barriers.	See figure 1
Terminal marking:	See figures 1 and 2.
Stop marking:	See figure 1
Qualification samples:	See table II.

Table I. Type designation and switching characteristics.

Type designation						
Component	Rotor designation 1/	Style	No. of sections	Dimension "X" 2/ ± .062 (1.57)	Approx. weight (ounces)	Max. rotational torque (pound-inches)
S	1	JR	5	3.75 (95.25)	29	25
S	1	JR	10	5.62 (142.88)	39	30
S	1	JR	15	8 (203.20)	48	45
S	1	JR	20	9.94 (252.53)	60	50
S	1	JR	25	11.81 (300 02)	70	55
S	2	JR	5	3.75 (95.25)	29	25
S	2	JR	10	5 62 (142.88)	39	30
S	2	JR	15	8 (203 20)	48	45
S	2	JR	20	9.94 (252 53)	60	50
S	2	JR	25	11.81 (300.02)	70	55
S	3	JR	5	3 75 (95.25)	29	25
S	3	JR	10	5 62 (142.88)	39	30
S	3	JR	15	8 (203.20)	48	45
S	3	JR	20	9.94 (252.53)	60	50
S	3	JR	25	11.81 (300.02)	70	55
S	4	JR	5	3 75 (95 25)	29	25
S	4	JR	10	5.62 (142.88)	39	30
S	4	JR	15	8 (203.20)	48	45
S	4	JR	20	9.94 (252.53)	60	50
S	4	JR	25	11.81 (300.02)	70	55

1/ For rotor designation, see figure 2.
2/ Dimensions are in inches. Metric equivalents (to the nearest 0 01 mm) are fiven for general information only and are based upon 1 inch = 25.4 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification test sample.

Sample switch	Test number 1/	Sample switch	Test number
S1JR25	1	S3JR25	4
S1JR25	2	S4JR25	1
S1JR25	3	S4JR25	2
S2JR25	4	S4JR25	3
S2JR25	1	S4JR25	4
S2JR25	2	S4JR25	5
S3JR25	3	S4JR25	6

1/ Test numbers in accordance with table II of MIL-S-21604.

Preparing activity
Navy - SH
(Project 5930-N680-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:02Z
Check the source to verify that this is the current version before use.