INCH POUND

MIL-S-21604/6A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/6(SHIPS)
5 September 1975

MILITARY SPECIFICATION SHEET

SWITCH, ASSEMBLIES FOR REMOTE OPERATED SWITCHES, 10 AMPERE,

STYLES RJR AND RJRA

Inactive for new design after 30 March 1992.
For new design use MIL-S-24187

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-S-21604


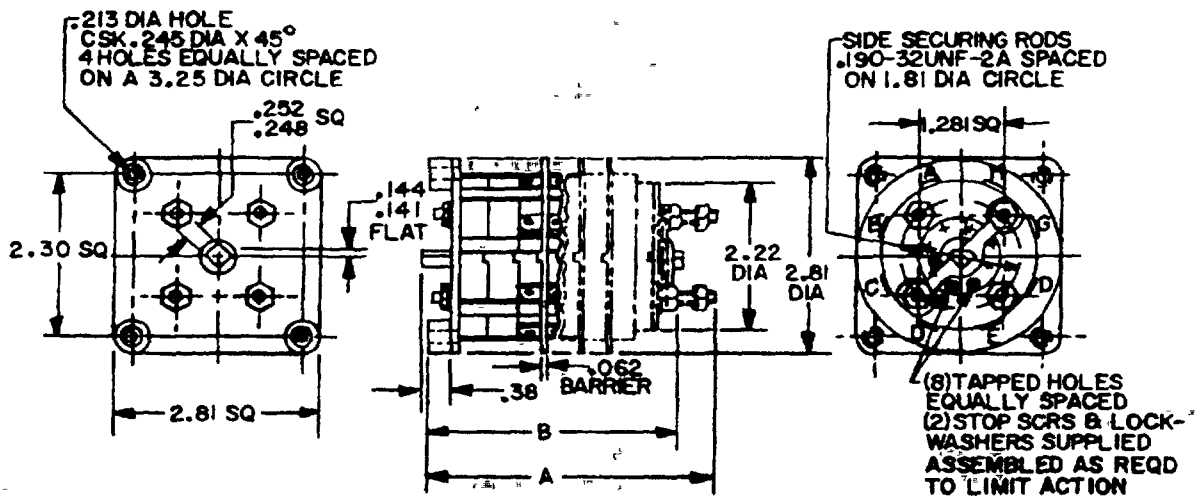


FIGURE 1. Styles RJR and RJRA switch.

AMSC N/A FSC 5930


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

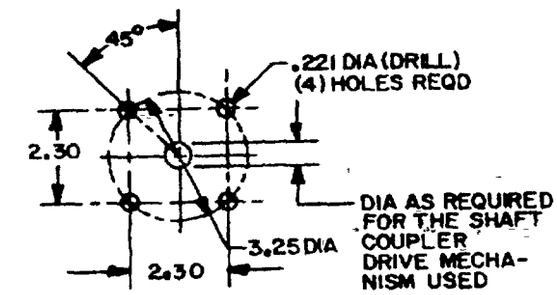

PANEL MOUNTING DIMENSIONS AND REAR SUPPORT

Inches	mm	Inches	mm
0.005	0.13	0.313	7.95
.141	3.58	0.44	11.18
.142	3.61	1.28	32.51
.144	3.68	1.81	45.97
.145	3.68	2.22	56.39
.213	5.41	2.30	58.42
.221	5.61	2.81	71.37
.245	6.22	3.25	82.55
.248	6.30		
.252	6.35		

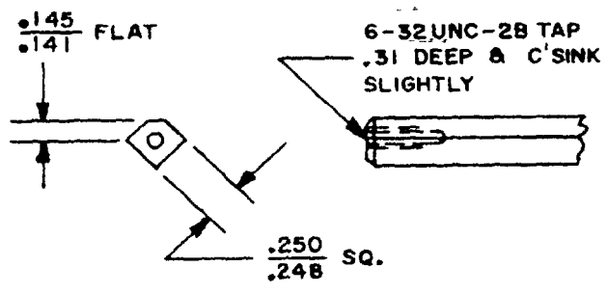


SHAFT

NOTES:


1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3. Unless otherwise specified, tolerances are plus or minus 0 016 (0.41 mm) for two-place decimals and plus or minus 0.005 (0.13 mm) for three-place decimals.

FIGURE 1. Styles RJR and RJRA switch. Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

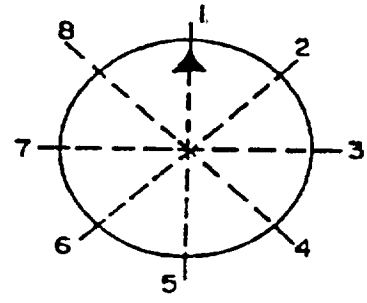


HANDLE POSITIONS

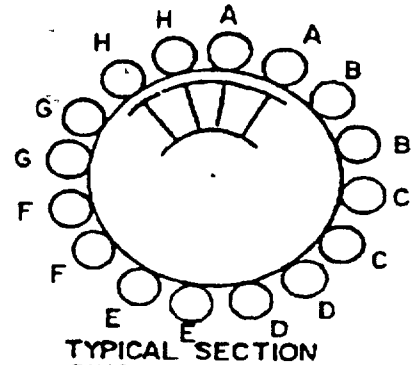


TYPICAL SECTION
SINGLE POLE
DOUBLE BREAK

ROTOR DESIGNATION 1

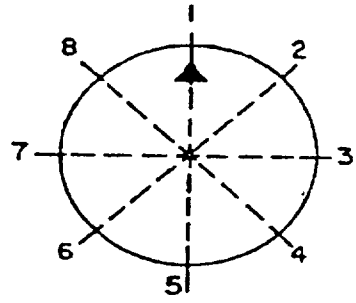

HANDLE POSITIONS

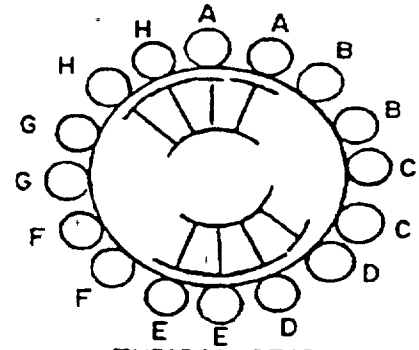


TYPICAL SECTION
DOUBLE POLE
DOUBLE BREAK


ROTOR DESIGNATION 2

NOTE: Viewed from the handle end


FIGURE 2. Rotor contact configuration and handle positions

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

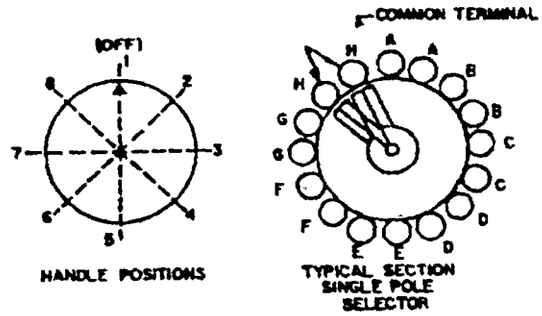

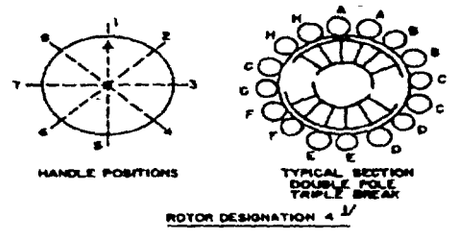

1/ WITH ROTOR CONFIGURATION 4, CONTACT H-1 BREAKS BEFORE C-3 MAKES, AND CONTACTS A-1 AND B-2 MAKE BEFORE A-2 AND B-3 BREAK



NOTE. Viewed from the handle end.

FIGURE 2 Rotor contact configuration and handle positions. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimension and configuration	See figures 1 and 2 and table I
Angle of throw:	45 degrees.
Switching action:	Detent.
Electrical loads:	Ac current: 10 amperes.
	Voltage: 125 volts (at 60-400 Hz, 0.80 inductive power factor).
Temperature rise:	30°C maximum.
Contact material:	Rotor: Silver-overlay phosphor-bronze.
	Stator: Silver-overlay copper
Barriers:	See figure 1.
Terminal marking:	See figure 1.
Stop marking:	See figure 1

Qualification samples. See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and switching characteristics

Type designation					Dimensions 2/			
Component	Rotor designation	Style	No. of switch sections	Total number of sections including control sections	"A" ±0.06 (1.57)	"B"	Approx. weight (ounces)	Maximum rotational torque (pound-inches)
S	1	RJR	25	27	12.56 (319 07)	12.06 (306.37) +0.14 (+ 3.58)	66	33-40
S	2	RJR	25	27	12.56 (319.07)	12.06 (306.37) +0.14 (+ 3.58)	66	39-46
S	3	RJR	25	27	12.56 (319.07)	12.06 (306.37) +0.14 (+ 3.58)	66	34-41
S	4	RJR	25	27	12.56 (319.07)	12.06 (306.37) +0.14 (+ 3.58)	66	43-50
S	2	RJRA	26	27	12.56 (319.07)	12.06 (306.37) +0.14 (± 3.58)	66	39-46

1/ For rotor designation, see figure 2
2/ Dimensions are in inches. Metric equivalent (to the nearest 0 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification test sample.

Sample switch	Test number 1/	Sample switch	Test number
S1JR25	1	S3JR25	4
S1JR25	2	S4JR25	1
S1JR25	3	S4JR25	2
S2JR25	4	S4JR25	3
S2JR25	1	S4JR25	4
S2JR25	2	S4JR25	5
S3JR25	3	S4JR25	6

1/ Test numbers in accordance with table II of MIL-S-21604.
2/ For group qualification see 4 5 1

Preparing activity:
Navy - SH
(Project 5930-N680-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.