INCH POUND

MIL-S-21604/7A(SH)
30 March 1992
SUPERSEDING
MIL-S-21604/7(SHIPS)
26 March 1979

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, MULTIPOLE AND SELECTOR, 10 AMPERE,

STYLES JR 304 AND JRM 300

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-S-21604


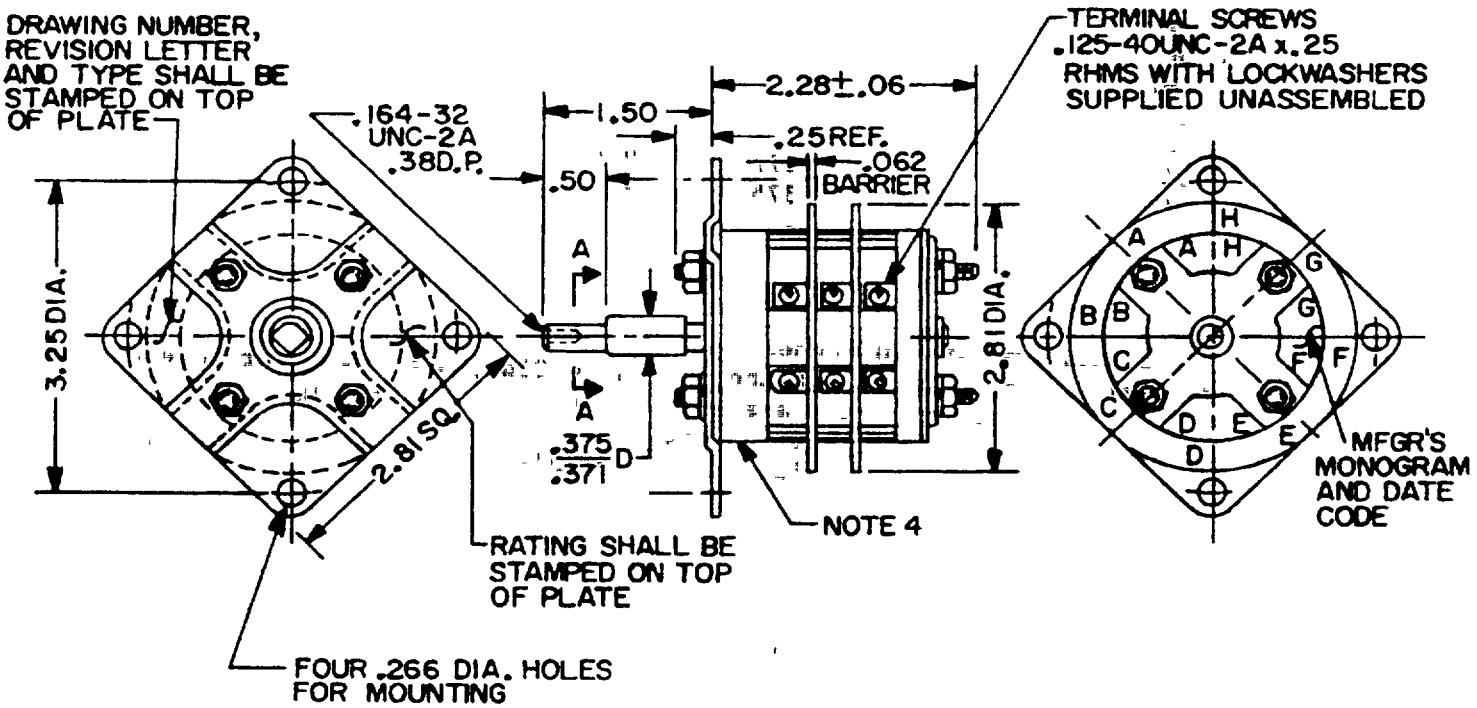


FIGURE 1 Styles JR 304 and JRM 300 switches.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

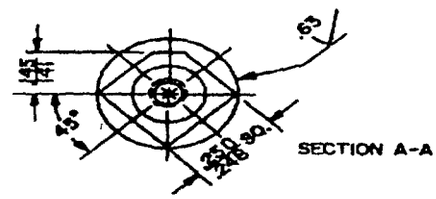


Inches	mm	Inches	mm	Inches	mm
$63(10^{-6})$	$16(10^{-4})$	0.248	6.30	0.50	12.70
0.06	1 52	.25	6.35	1 50	38.10
.062	1 57	.252	6.40	2.28	57.91
.141	3.58	.266	6 76	2 81	71.37
.142	3 61	.313	7 95	3.25	82.55
.144	3 66	.371	9 42		
145	3 68	.375	9.53		
.164	4 17	.38	9 65		

NOTES:

1. Dimensions are in inches
2. Metric equivalents (to the nearest 0.01mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.016 (0.41mm) for two-place decimals and plus or minus 0.005 (0.13mm) for three-place decimals
4. Detent mechanism in JR 304; spring return in JRM 300.

FIGURE 1 Styles JR 304 and JRM 300 switches - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

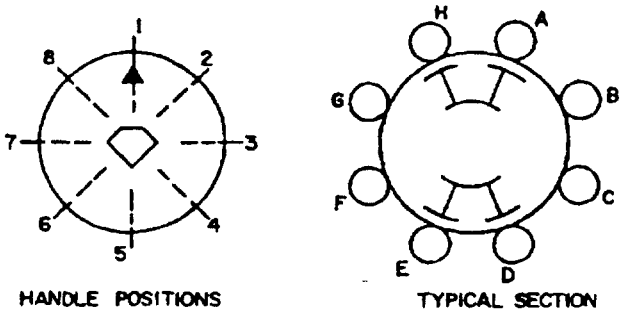

SH 11314 ROTOR DESIGNATION 2

NOTE: Viewed from Handle end.

FIGURE 2 Rotor contact configuration and handle positions

REQUIREMENTS:

Dimensions and configuration	See figures 1 and 2 and table I.
Angle of throw.	45 degrees.
Switching action	JR 304 - detent. JRM 300 - Switch provides for spring return from position 6 to position 1, and from position 4 to position 1. Internal stops and stop mechanisms are not available and the use of external stops is required to limit travel to a lesser number of position
Electrical loads	Ac current. 10 amperes. Voltage: 125 volts (60-400 Hz, 0 80 inductive power factor).
Temperature rise:	30°C maximum.
Contact material:	Rotor: Silver-overlay phosphor bronze. Stator: Silver-overlay copper.
Barriers:	See figure 1.
Terminal marking:	See figure 1.
Stop marking	See figure 1.
Qualification samples	See table II

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.

TABLE I Type designation and switching characteristics.

Component	Style 1/	Rotor Designation 2/	No of sections	Operating positions	Approx weight (ounces)	Max. rotational torque (pound-inches)
S	JR 304	2	3	8	17	15
S	JRM 300	2	3	3	17	30

1/ Style and type designations are synonymous for JR 304 and JRM 300, respectively
2/ For rotor designation, see figure 2.

TABLE II. Qualification test sample.

Sample switch	Test number 1/	Sample switch	Test number
S2JR304	1	S2JRM304	1
S2JR304	2	S2JRM304	2
S2JR304	3	S2JRM304	3
S2JR304	4	S2JRM304	4
S2JR304	5	S2JRM304	5
S2JR304	6	S2JRM304	6

1/ Test numbers in accordance with table II of MIL-S-21604
2/ For group qualification see 4.5.1

Preparing activity:
Navy - SH
(Project 5930-N680-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:03Z
Check the source to verify that this is the current version before use.