MIL-P-21593C(MC)
30 December 1971
SUPERSEDING
MIL-P-21593B(MC)
19 August 1966

MILITARY SPECIFICATION

PANEL MARKERS: RANGE, FLANK, AND DEBARKATION POINT; NYLON, FLUORESCENT

1. SCOPE

1.1 Scope. This specification covers the requirements for range, flank and debarkation point panel markers.

*1.2 Classification. The panel markers shall be of the following types and classes, as specified (see 6.2):

Type I - Range panel markers
- Class 1 - Yellow
- Class 2 - Green
- Class 3 - Red
- Class 4 - Blue
- Class 5 - White (Also used as the wheeled vehicle debarkation point panel marker.)

Type II - Flank panel markers
- Class 1 - Yellow
- Class 2 - Green
- Class 3 - Red
- Class 4 - Blue
- Class 5 - White

Type III - Debarkation point panel markers
- Class 1 - Water
- Class 2 - Gas and Oil
- Class 3 - Tracked Vehicles
- Class 4 - Ammunition
- Class 5 - Rations
- Class 6 - Miscellaneous Supplies
- Class 7 - Medical Supplies

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-295	- Thread, Nylon.
QQ-W-461	- Wire, Steel, Carbon, (Round, Bare, And Coated).
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-476	- Cloth, Bunting Nylon, And Nylon And Wool.
DDD-L-20	- Label, For Clothing, Equipage, And Tentage, (General Use).
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached Or Dyed).

MILITARY

MIL-C-7219	- Cloth, Duck, Nylon, Parachute Packs.
MIL-G-16491	- Grommet, Metallic.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished panel markers specified by the procuring activity (see 6.2), shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

*3.3.1 Basic material. The basic material shall be cloth, nylon bunting, conforming to type I, class A of CCC-C-476, except that the requirements and respective quality assurance provisions for matching colorfastness and finish of CCC-C-476 shall not apply.

*3.3.1.1 Color. The color of the basic material, except black, shall approximate shades conforming to the following cable numbers:

Yellow:	Cable No. 70068
Green:	Cable No. 70168
Red:	Cable No. 70179
Blue:	Cable No. 70209
White:	Cable No. 70001

The colors of the basic fluorescent material, except black and white, shall be obtained by the use of fluorescent dyes. The use of fluorescent brightener is required for the white material. The fluorescent dyes and brighteners shall be those formulations adaptable to nylon cloth and shall permit high visibility during poor daylight conditions and good fluorescent emission under ultraviolet excitation. The basic material, when dyed with fluorescent dyes, shall show "good" fastness to wet and dry crocking and dry cleaning when tested as specified in Section 4, Table I.

*3.3.2 Grommet reinforcement patches. The triangular patches shall consist of a single ply of cloth, nylon duck, 7.25-ounce per square yard maximum, conforming to type III of MIL-C-7219, covered on the outside with basic material. The size of the reinforcement patches shall be shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*3.3.3 Binding. Binding for the raw edges of the panels and for the raw edges of the wind holes shall be cloth, nylon, duck, 7.25-ounce per square yard maximum, olive green shade No. 106, conforming to type III of MIL-C-7219. Binding shall be cut 3-1/2 ±1/8 inches wide for edges of the panels and 1-1/8 +1/8 -0 inches wide for the edges of the wind holes.

*3.3.4 Thread. The thread for all seaming and stitching shall be nylon, twisted soft multiple cord, or twisted bonded multicord, low elongation, size B, 2-or 3-ply, conforming to type I or type II, class 1 of V-T-295. The color of the thread shall be a close approximation of the color of the material on which it is used. The color-fastness requirements of the thread shall show "good" fastness to wet and dry crocking and dry cleaning.

3.3.5 Grommets and washers. Grommets and spur washers shall be brass, rolled rim type, black chemical finish, conforming to type III, class 3, size No. 2 of MIL-G-16491. Six grommets and washers are required for each panel marker.

*3.3.6 "S" hooks. The "S" hooks shall be made from steel wire conforming to steel No. 1015, finish 5 of QQ-W-461, except the coating weight shall not apply. The "S" hooks shall have a zinc finish with a minimum thickness of 0.002 inch, be 5/32 inch in diameter, and conform to the dimensions shown in Figure 1. Six hooks are required for each panel marker.

*3.3.7 Label. Each panel marker shall have an identification label conforming to type IV, class 1 of DDD-L-20. The content and format shall be as follows. The labels shall show fastness to laundering.

Nomenclature

Contract number

Name of contractor

Stock number

Fiber Products Act Information

Size of characters for stock number and name of contractor shall be minimum 8 point, approximately 3/32 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*3.4 Design. Panel markers shall conform in all respects to the design and color details shown on Figures 1 through 6. All type I and II panel markers shall be in solid colors. All panel markers shall be made with wind holes. The range and debarkation panel markers shall be 6 by 6 feet and the flank panel markers shall be 12 feet long and 2-1/2 feet wide.

*3.5 Construction. The construction shall conform to Figures 1 through 6 and the following. The panel markers shall be made of single plies of basic material joined together to conform to the color and design details shown on Figures 2 through 6. The raw edges of the panel markers and wind holes shall be bound with nylon binding (see 3.3.3) as shown in Figure 1. Each panel marker shall be provided with grommets and "S" hooks as specified herein.

***3.5.1 Stitches, seams, and stitchings. Stitch and seam types specified** herein **shall conform to FED-STD-751. All stitching and seaming shall be stitch type 301, 8 to 12 stitches per inch. Ends of seams and rows of stitching not caught in other seams or rows of stitching shall be backtacked not less than 1 inch. Thread breaks shall be secured by stitching back of break not less than 1 inch at each break. Thread tension shall be maintained properly** so that there will be no loose stitching and the lock will be imbedded **in the center of the materials sewn. All thread ends shall be trimmed.**

*3.5.2 Setting of grommets and washers. Grommets and washers shall be set with all grommets placed on the face side of the panel markers. When holes are punched to receive grommets, they shall be smaller than the outside diameter of the grommet barrier so that the barrel must be forced through the hole. Grommets shall be securely clinched without cutting or otherwise damaging the material.

3.5.2.1 Location of grommets and washers. Grommets and washers shall be positioned as shown on Figure 1 and as specified herein. One grommet and washer shall be positioned at each corner of all panel markers. On type II panel markers, one grommet and washer shall be positioned not more than 1/2 inch off center of either of two long sides. On all other panel markers, one grommet and washer shall be positioned not more than 1/2 inch off center of either of two parallel sides.

*3.5.2.2 Grommet reinforcement patches. Grommets and washers shall be reinforced with triangular shaped patches of nylon duck material covered on the outer side with basic material of the same color as the panel marker to which the reinforcement is sewn as shown in Figure 1.

3.5.3 Attachment of "S" hooks. One "S" hook shall be attached through each grommet. The small end of the hooks shall be inserted through the grommet and both ends shall be closed by bending the ends against the body of the hook.

*3.6 Marking. The identification label specified in 3.3.7 shall be marked at the center of the binding on the edge of the panel marker at any convenient location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*3.7 Finished dimensions. The dimensions of the finished panel markers shall conform to the following:

Overall dimensions

Types I and III, length and width: 6 feet
+1-1/2 inches
-1/4 inch

Type II:

Length: 12 feet
+3 inches
-1/2 inch

Width : 2-1/2 feet
+1 inch
-1/2 inch

Placement of wind holes - ±1 inch of dimensions shown on Figures 1 through 6.

*3.8 Workmanship. **The finished panel markers shall conform to the quality and grade of product established by this specification.** The occurrence of **defects shall not exceed the applicable acceptable quality levels (AQL's).**

4. QUALITY ASSURANCE PROVISIONS

***4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.**

***4.1.1 Certificate of compliance. Where certificates of compliance are** submitted, the Government reserves the right to check test such items to determine the **validity of the certification.**

***4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.**

***4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated panel marker for conformance to all provisions of this specification.**

***4.2.2 Component and material inspection.** In accordance with 4.1, components **and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended,modified, or qualified in this specification or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table I for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final results.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*4.2.2.1 Sampling for testing. The sample unit size shall be 1 yard, full width, put up on rolls and protected from exposure to light during preparation for shipment. The outside of the shipping pack shall be annotated as follows:

Do Not Expose To Light

The sample size shall be in accordance with CCC-C-476.

Table I - Component testing

Component	Characteristic	Rqmt. ref.	Test method	No. Determinations per sample unit	Results reported as
Fluorescent nylon cloth (except black)	Shall permit high visability during daylight conditions.	3.3.1.1	1/		
	Shall show good fluorescent emission under ultraviolet excitation.	3.3.1.1	1/		
Fluorescent nylon cloth	Colorfastness to:				
	Dry cleaning	3.3.1.1	5620 1/	1	Pass or fail
	Dry crocking	3.3.1.1	5650 1/	1	Pass or fail
	Wet crocking	3.3.1.1	5650 1/	1	Pass or fail
"S" hook	Plating thickness	3.3.6	Std. comm'l	5	To nearest 0.0001 inch

1/ A certificate of compliance will be acceptable for these requirements.

*4.2.2.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified herein. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the requirements specified herein.

Requirement and operation	Requirement paragraph
Width of binding for panel marker edges.	3.3.3
Width of binding for wind holes.	3.3.3
Holes punched for snap fasteners are smaller than outside diameter of the barrel for the button and eyelet.	3.5.2
Grommets on face side of panel, marker.	3.5.2

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.2 and 4.2.3.3. The sample unit shall be one panel marker.

*4.2.3.2 Classification of defects. All defects shall be classified as indicated below except those with an asterisk (*) in the classification column which shall be classified as:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Major defect - When seriously affecting appearance or serviceability.

Minor defect - When affecting appearance or serviceability, but not seriously.

*4.2.3.2 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	(*)	Minor
Quality of cloth	a. Not type or material specified.	X		
	b. Hole, tear or cut.		*	
	c. Spot, streak, discoloration, or stain clearly noticeable when viewed at a distance of 6 feet.		*	
	d. Abrasion marks, resulting in thin or weak place.		*	
	e. Smash.		*	
	f. Floats or skips: 1. Multiple floats or skips 1/2 inch or more in combined direction.	X		
	2. Multiple floats or skips less than 1/2 inch in combined direction.			X
	g. More than 2 single floats or skips up to and including 1/2 inch in length.			X
	h. Broken or missing yarns: 1. Two or more contiguous 2 inches or more in length.	X		
	2. Two contiguous less than 2 inches in length.			X
	3. Single, 2 inches or more in length.			X
	i. Uneven weaving throughout.	X		
	j. Overall uncleanliness.		*	
	k. Slough-off, jerked-in filling, slubs, slugs, gouts, 3 or more times the thickness of normal yarns.		*	
	l. Color not as specified, or does not match approved standard shade or specified shade number.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*) Minor
	m. Uneven dyeing, shading, spottiness, poor penetration of dye.		*
Thread	a. Not thread type, size or color specified.	X	
	b. Cut, torn, chafed or otherwise damaged.		*
Metal components (Grommets, Washers and "S" Hooks)	a. Not fabricated of material specified.	X	
	b. Does not have specified finish.	X	
	c. Evidence of rust or corrosion.		*
	d. Grommet or spur washer not specified type, class or size.	X	
	e. Finish on "S" hook chipped or flaked.		*
	f. "S" hook not galvanized (zinc coated).	X	
	g. Area on "S" hook not galvanized (zinc coated).		*
	h. Damaged, dented, bent, misshapen, or otherwise impaired.		*
	i. Broken, fractured, or cracked.	X	
	j. Sharp burr, sliver or edge that may damage panel or cause injury.		*
Design	a. Any characteristic not as specified.	X	
	b. Does not conform to specified drawing or approved sample.	X	
Construction and workmanship	a. Any part not attached or not assembled as specified.	X	
	b. Operation omitted.	X	
	c. Operation not properly performed.		*
	d. Component missing.	X	
	e. Component wrong type or size.		*
	f. Wrong type or class panel marker.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor
	g. Edges of binding material frayed or scalloped.	*	
	h. Grommets and spur washers:		
	1. Improperly set, i.e., grommets not placed on face side of panel marker.		X
	2. Insecurely clinched or otherwise defective.	*	
	3. Not reinforced with the triangular shaped patches.	X	
	4. Improperly positioned or located.	*	
	5. Clinched too tightly, cutting surrounding fabric.	X	
	6. Less than 6 grommets and washers on panel.	X	
	i. "S" Hooks:		
	1. Any end not closed.	*	
	2. Large end of hook inserted through grommet in lieu of small end.		X
	3. Less than 6 hooks for each panel marker.	X	
	j. Seams and stitches:		
	1. Incorrect seam or stitch type.	X	
	2. Backstitching omitted, where required.	*	
	3. Thread break backstitched less than 1 inch.	X	
	4. Ends of stitching backstitched less than 1 inch (except where ends are held down by other stitching or turned under in a hem).		X
	5. Less than 6 stitches per inch.	X	
	6. From 6 to 7 stitches per inch.		X
	7. More than 10 stitches per inch.		X
	k. Mend, patch, or darn.	*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor
	1. Needle chew which may develop into a hole.	X	
	m. Loose or tight tension.		X
	n. Open seam 1/2 inch or more in length.	X	
	o. Open seam up to 1/2 inch in length.		X
	p. More than one thread end not trimmed.		X
	q. Wrong stitching gage or wrong stitching margin.		X
	r. Exposed raw edge.	*	
	s. Seams irregular, skipped, or unevenly gaged.	*	
Marking	Missing, incorrect, illegible, text incomplete, marking in wrong location, size or lettering not as specified, or color of marking not as specified.		X

*4.2.3.3 Finished measurements. Any dimension that is not within the tolerances specified herein shall be classified as a defect.

*4.2.3.4 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.2

Inspection level II of MIL-STD-105

AQL	Major	4.0 DHU
	Total Major and Minor (combined)	10.0 DHU

4.2.3.3

Inspection level S-3 of MIL-STD-105

One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of panel markers per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. The free end of each "S" hook shall be completely wrapped with 1-inch-wide tape conforming to type III, class 1 of DDD-T-86 in such a manner as to cover the ends of the hook to prevent damage to the panel marker. Each panel marker shall be neatly folded to approximately 14 inches long by 10 inches wide and placed in an individual polyethlene bag measuring approximately 16 by 12 inches with a 1-inch lip along the open 12-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during the final heat sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Level C. The panel markers shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

*5.2.1.1 Method 1. Four panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class weather resistant, size 1A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract, or when there is less than the required amount per container of the same type and class, mixed types and classes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), twelve level B shipping containers (48 panel markers of one type and class only) shall be packed in a shipping container conforming to class weather resistant, size 4, of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same type and class, mixed types and classes may be packed within the same shipping container.

*5.2.2 Level B. Four panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class domestic, size 1A of MIL-B-17757, assembled, and closed as specified in the appendix thereto. The fiberboard used in fabrication of the box and liner shall be grades 275 and 200 respectively. In addition, each container shall have

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract, or when there is less than the required amount per container of the same type and class, mixed types and classes may be packed within the same shipping container.

*5.2.3 Level C. Panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. Polyethylene bagged packages shall have the following information legibly printed or stamped directly on the bag or in black on a paper label inserted within the bag so as to permit ready identification.

Nomenclature (Type and Class)
Federal Stock Number
Contract Number
Contractor's Name

*5.3.1 Labels. Each shipping container packed with mixed types or classes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label with the words designating the combination plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity of each type and class contained therein.

6. NOTES

*6.1 Intended use. The panel markers covered by this specification are intended for use by shore party personnel during beach operations.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Type and class required (1.2).
(c) Whether first article is required (see 3.2).
(d) Number of panels in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding availability of samples of the panel marker and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8345-N101

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

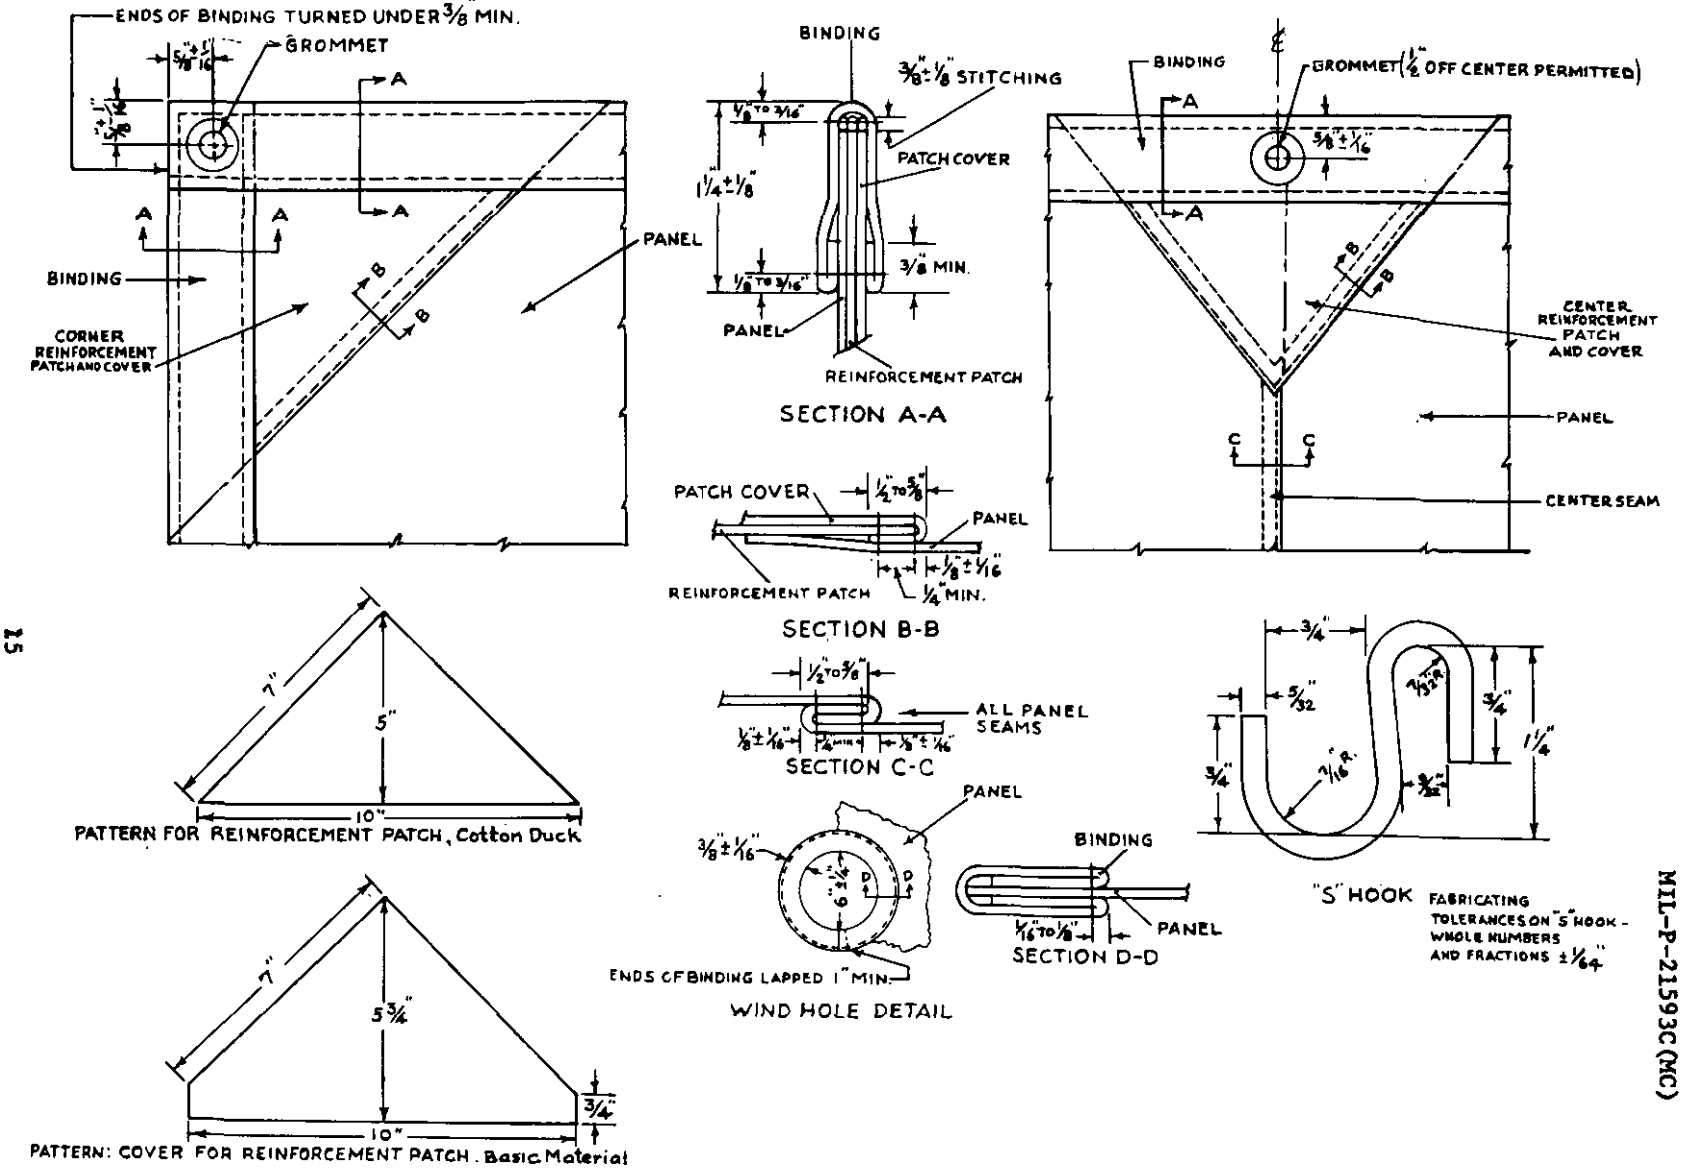



FIGURE 1 RANGE, FLANK AND DEBARKATION POINT PANEL MARKERS:- Construction Details and Components FOR ALL TYPES AND CLASSES

M.C.S.A. 826 : R.G.F. 30 Dec 71


MIL-P-21593C(MC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

NOTE: 1. BINDING NOT SHOWN (SEE FIG.6)
2. TYPES I AND II, AND TYPE III CLASS 8 ARE SOLID COLORS
3. ALL PANEL SEAMS DOUBLE LAPPED AND DOUBLE STITCHED (SEE FIG.6)
4. ALL OVERALL AND INTERMEDIATE DIMENSIONS ARE INCLUSIVE OF BINDING
5. OVERALL DIMENSIONS OF TYPE III PANELS - 6' X 6'

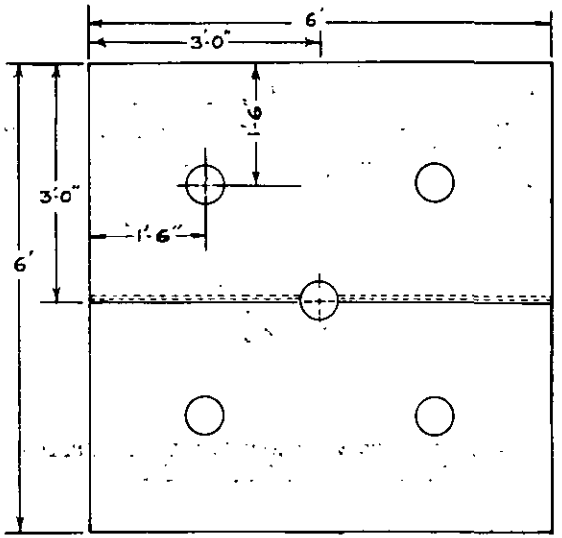


TYPE I CLASSES 1 TO 5:- RANGE PANELS

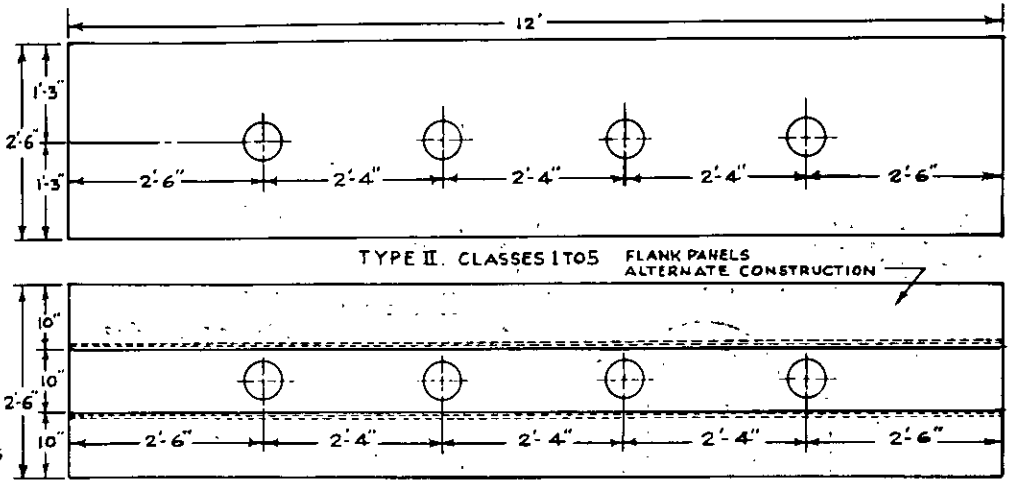


TYPE II. CLASSES 1 TO 5 FLANK PANELS ALTERNATE CONSTRUCTION


FIGURE 2. RANGE AND FLANK PANEL MARKERS:— Placement of Wind Holes and Stitching Requirements for TYPES I AND II. CLASSES 1 TO 5.

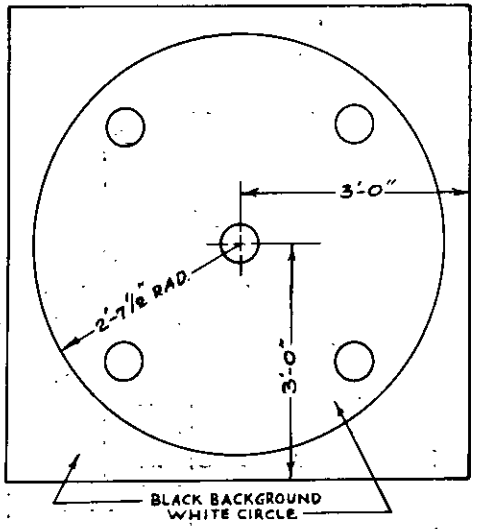

TYPE III. CLASS 1: WATER Debarkation Point

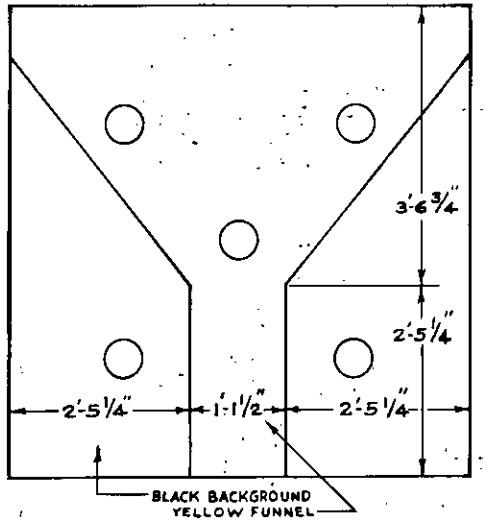

TYPE III CLASS 2: GAS AND OIL Debarkation Point

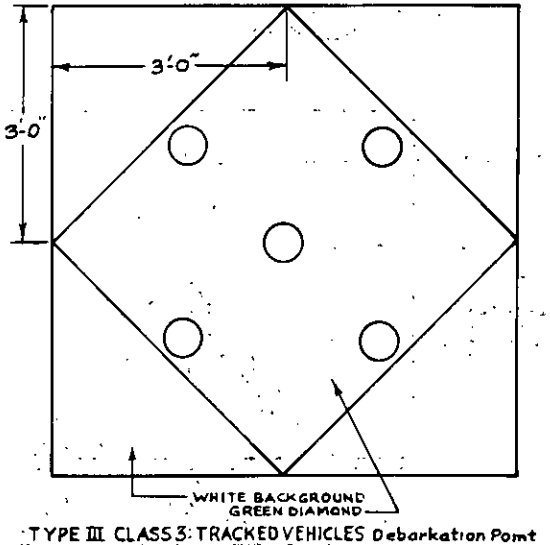


TYPE III CLASS 3: TRACKED VEHICLES Debarkation Point

FIGURE 3 DEBARKATION POINT PANEL MARKERS:- Design and Color Details for TYPE III CLASSES 1 TO 3

M.C.S.A.
826: RGF
30 Dec 71


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

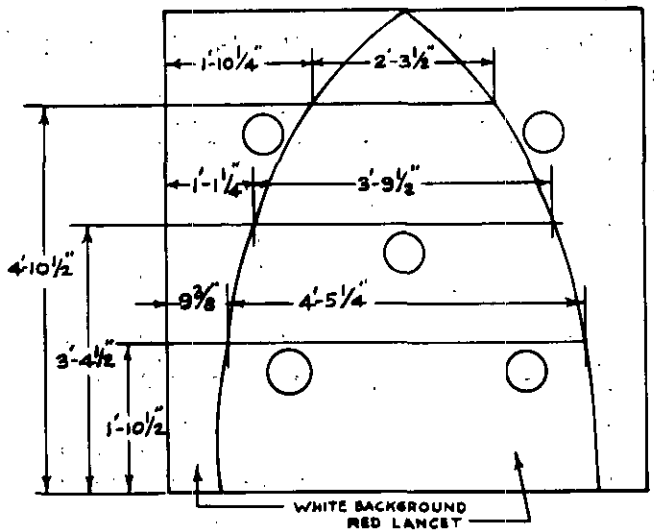


TYPE III CLASS 4: AMMUNITION Debarkation Point

NOTE


1. BINDING NOT SHOWN (SEE FIG. 6)
2. ALL OVERALL AND INTERMEDIATE DIMENSIONS ARE INCLUSIVE OF BINDING
3. OVERALL DIMENSIONS OF PANELS - 6' X 6'

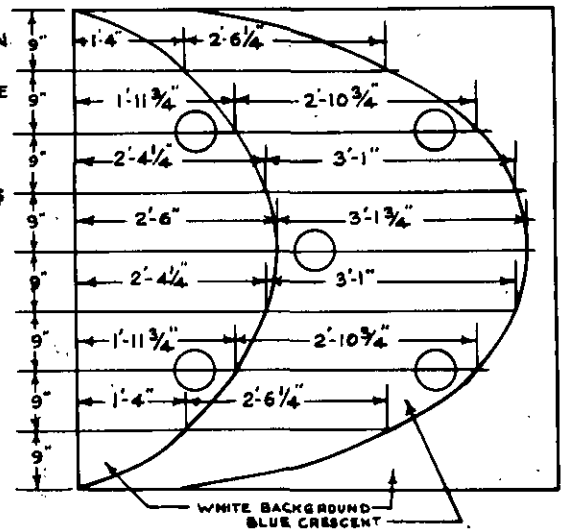

TYPE III CLASS 5: RATIONS, Debarkation Point

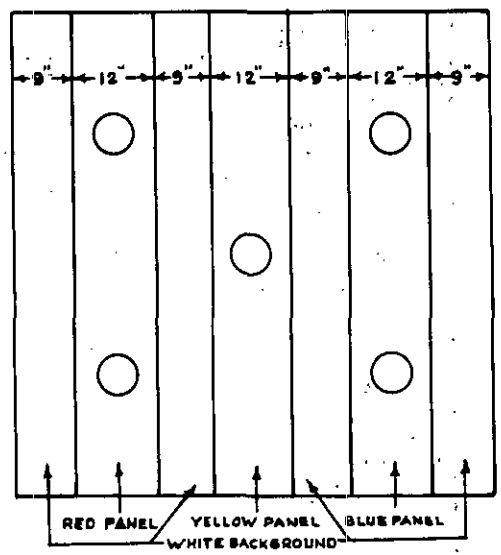

TYPE III CLASS 6: MISCELLANEOUS SUPPLIES, Debarkation Point

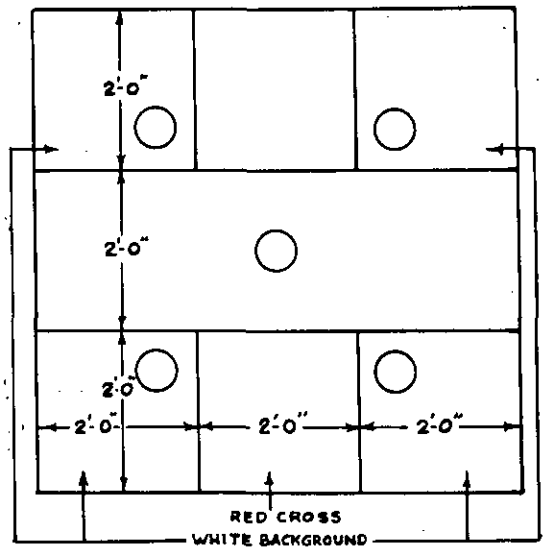

TYPE III CLASS 7 MEDICAL SUPPLIES, Debarkation Point

FIGURE 4 DEBARKATION POINT PANEL MARKERS.- Design and Color Details for TYPE III. CLASSES 4 TO 7

M.C.S.A. 826: R&F 30 Dec 71

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.


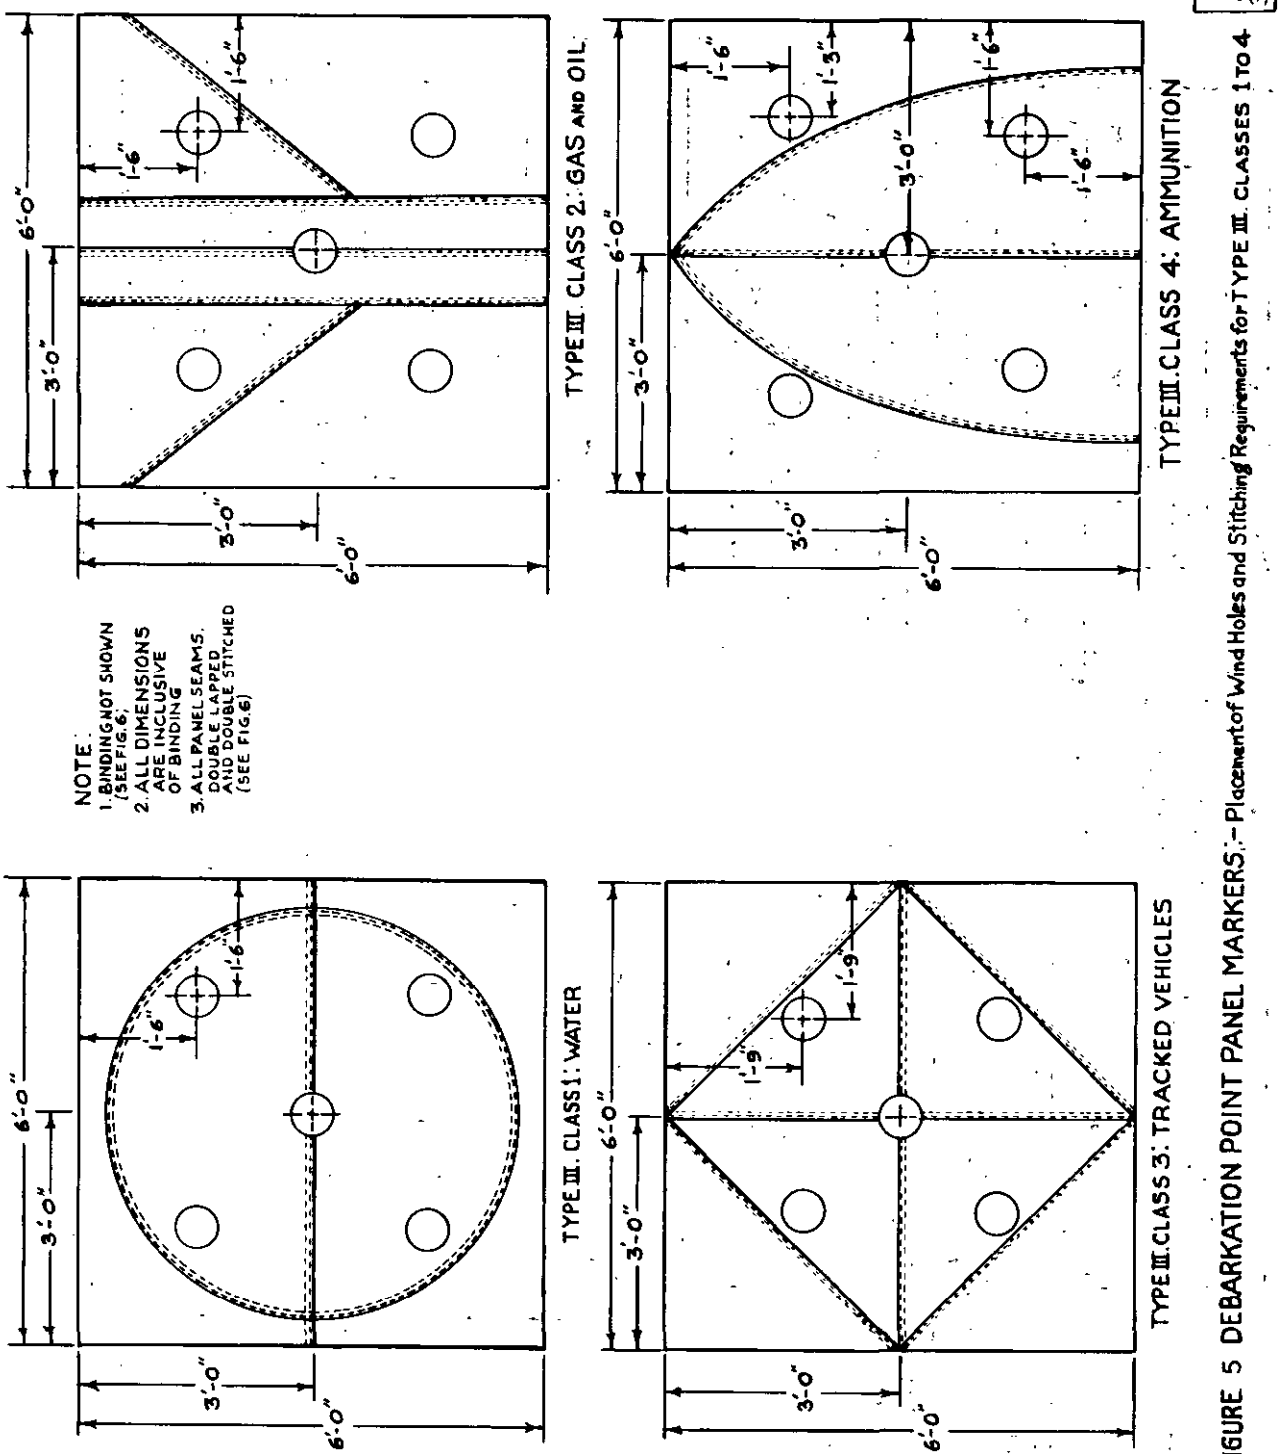



FIGURE 5 DEBARKATION POINT PANEL MARKERS.- Placement of Wind Holes and Stitching Requirements for TYPE III. CLASSES 1 TO 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

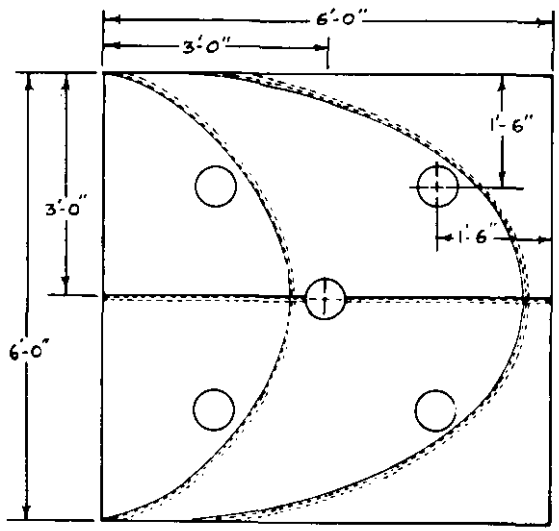


TYPE III CLASS 5: RATIONS

NOTE.
1. BINDING NOT SHOWN (SEE FIG. 6.
2. ALL DIMENSIONS ARE INCLUSIVE OF BINDING
3. ALL PANEL SEAMS, DOUBLE LAPPED AND DOUBLE STITCHED (SEE FIG 6)

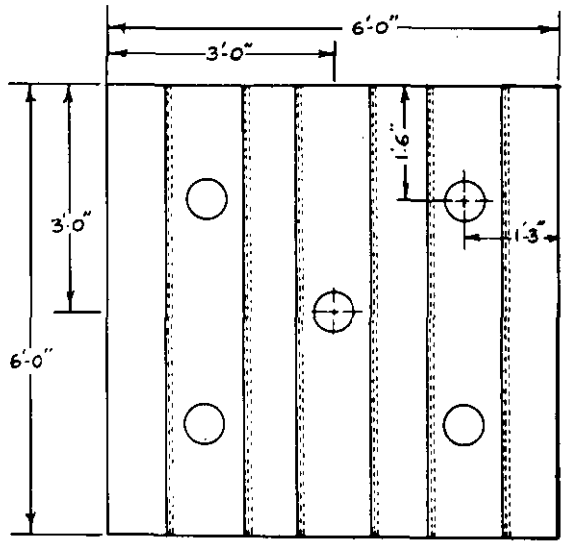

TYPE III CLASS 6: MISCELLANEOUS SUPPLIES

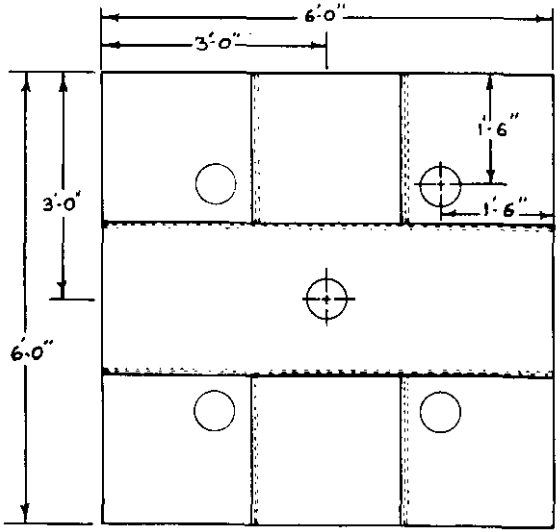

TYPE III CLASS 7: MEDICAL SUPPLIES

FIGURE 6 DEBARKATION POINT PANEL MARKERS: Placement of Wind Holes and Stitching Requirements for TYPE III CLASSES 5 TO 7

M.C.S.A. 826 : R.G.F. 30 Dec'71

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

Commanding General (825)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.