INCH-POUND

MIL-P-21593D(MC)
14 FEBRUARY 1991
SUPERSEDING
MIL-P-21593C(MC)
30 December 1971

MILITARY SPECIFICATION

Panel Markers: Range, Flank, and Debarkation Point; Nylon, Fluorescent

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for range, flank and debarkation point panel markers.

1.2 Classification. The panel markers shall be of the following types and classes as specified (see 6.2):

Type I - Range panel markers
- Class 1 - Yellow
- Class 2 - Green
- Class 3 - Red
- Class 4 - Blue
- Class 5 - White (Also used as the wheel vehicle debarkation point panel marker.)

Type II - Flank panel markers
- Class 1 - Yellow
- Class 2 - Green
- Class 3 - Red
- Class 4 - Blue
- Class 5 - White

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Type III - Debarkation point panel markers
Class 1 - Water
Class 2 - Gas and Oil
Class 3 - Tracked Vehicles
Class 4 - Ammunition
Class 5 - Rations
Class 6 - Miscellaneous Supplies
Class 7 - Medical Supplies

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-295	- Thread, Nylon.
QQ-W-461	- Wire, Steel, Carbon, (Round, Bare, and Coated).
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-476	- Cloth, Bunting Nylon, And Nylon And Wool.
DDD-L-20	- Label, For Clothing, Equipage, and Tentage, (General Use).
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached Or Dyed).

MILITARY

MIL-C-7219	- Cloth, Duck, Nylon.
MIL-G-16491	- Grommet, Metallic.
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, and Stitching.

MILITARY

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

MIL-STD-105 - Sampling Procedures and Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment and Storage.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS
U.S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Non-government Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These douments also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS.

3.1 Standard Sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, finished panels shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, nylon bunting, conforming to type I, class A of CCC-C-476, except that the requirements and respective quality assurance provisions for matching colorfastness and finish of CCC-C-476 shall not apply.

3.3.1.1 Color. The color of the basic material, except black, shall approximate shades conforming to the following cable numbers:

Yellow:	Cable No. 70068
Green:	Cable No. 70168
Red:	Cable No. 70179
Blue:	Cable No. 70209
White:	Cahle No. 70001

The colors of the basic fluorescent material, except black and white, shall be obtained by the use of fluorescent dyes. The use of fluorescent brightener is required for the white material and may be used for other colors with contracting officer approval. The fluorescent dyes and brighteners shall be those formulations adaptable to nylon cloth and shall permit high visibility during poor daylight conditions and good fluorescent emission under ultraviolet excitation. The basic material, when dyed with

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:58Z
Check the source to verify that this is the current version before use.

fluorescent dyes, shall show "good" fastness to wet and dry crocking and dry cleaning when tested as specified in Section 4, Table I.

3.3.2 Grommet reinforcement patches. The triangluar patches shall consist of a single ply of cloth, nylon duck, 7.25-ounce per square yard maximum, conforming to type III of MIL-C-7219, covered on the outside with basic material. The size of the reinforcement patches shall be shown in Figure 1.

3.3.3 Binding. Binding for the raw edges of the panels and for the raw edges of the wind holes shall be cloth, nylon, duck, 7.25-ounce per square yard maximum, olive green shade No. 106, conforming to type III of MIL-C-7219. Binding shall be cut 3-1/2 ± 1/8 inches wide for edges of the panels and 1-1/8 +1/8 inches wide for the edges of the wind holes.

3.3.4 Thread. The thread for all seaming and stitching shall be nylon, twisted soft multiple cord, or twisted bonded multicord, low elongation, size B, 2-or 3-ply, conforming to type I or type II, class 1 of V-T-295. The color of the thread shall be a close approximation of the color of the material on which it is used. The color-fastness requirements of the thread shall show "good" fastness to wet and dry crocking and dry cleaning.

3.3.5 Grommets and washers. Grommets and spur washers shall be brass, rolled rim type, black chemical finish, conforming to type III, class 3, size No.2 of MIL-G-16491. Six grommets and washers are required for each panel marker.

3.3.6 "S" hooks. The "S" hooks shall be made from steel wire conforming to steel No. 1015, finish 5 of QQ-W-461, except the coating weight shall not apply. The "S" hooks shall have a zinc finish with a minimum thickness of 0.002 inch, be 5/32 inch in diameter, and conform to the dimensions shown in Figure 1. Six hooks are required for each panel marker.

3.3.7 Label. Each panel marker shall have an identification label conforming to type IV, class 1 of DDD-L-20. The content and format shall be as follows. The labels shall show fastness to laundering.

Nomenclature
Contract number
Name of contractor
Stock number
Fiber Products Act Information

Size of characters for stock number and name of contractor shall be minimum 8 point, approximately 3/32 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

3.4 Design. Panel markers shall conform in all respects to the design and color details shown on Figures 1 through 6. All type I and II panel markers shall be in solid colors. All panel markers shall be made with wind holes. The range and debarkation panel markers shall be 6 by 6 feet and the flank panel markers shall be 12 feet long and 2-1/2 feet wide.

3.5 Construction. The construction shall conform to Figures 1 through 6 and the following. The panel markers shall be made of single plies of basic material joined together to conform to the color and design details shown on Figures 2 through 6. The raw edges of the panel markers and wind holes shall be bound with nylon binding (see 3.3.3) as shown in Figure 1. Each panel marker shall be provided with grommets and "S" hooks as specified herein.

3.5.1 Stitches, seams, stitchings. Stitch and seam types specified herein shall conform to FED-STD-751. All stitching and seaming shall be stitch type 301, 8 to 12 stitches per inch. Ends of seams and rows of stitching not caught in other seams or rows of stitching shall be backtacked not less than 1 inch. Thread breaks shall be secured by stitching back of break not less than 1 inch at each break. Thread tension shall be maintained properly so that there will be no loose stitching and the lock will be imbedded in the center of the materials sewn. All thread ends shall be trimmed.

3.5.2 Setting of grommets and washers. Grommets and washers shall be set with all grommets placed on the face side of the panel markers. When holes are punched to receive grommets, they shall be smaller than the outside diameter of the grommet barrier so that the barrel must be forced through the hole. Grommets shall be securely clinched without cutting or otherwise damaging the material.

3.5.2.1 Location of grommets and washers. Grommets and washers shall be positioned as shown on Figure 1 and as specified herein. One grommet and washer shall be positioned at each corner of all panel markers. On type II panel markers, one grommet and washer shall be positioned not more than 1/2 inch off center of either of two long sides. On all other panel markers, one grommet and washer shall be positioned not more than 1/2 inch off center of either of two parallel sides.

3.5.2.2 Grommet reinforcement patches. Grommets and washers shall be reinforced with triangular shaped patches of nylon duck material covered on the outer side with basic material of the same color as the panel marker to which the reinforcement is sewn as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

3.5.3 Attachment of "S" hooks. One "S" hook shall be attached through each grommet. The small end of the hooks shall be inserted through the grommet and both ends shall be closed by bending the ends against the body of the hook.

3.6 Marking. The identification label specified in 3.3.7 shall be marked at the center of the binding on the edge of the panel marker at any convenient location.

3.7 Finished dimensions. The dimensions of the finished panel markers shall conform to the following:

Overall dimensions	
Types I and III, length and width:	6 feet +1-1/2 inches -1/4 inch
Type II:	
Length:	12 feet +3 inches -1/2 inch
Width:	2-1/2 feet +1 inch -1/2 inch
Placement of wind holes - ±1 inch of dimensions shown on Figures 1 through 6.	

3.8 Workmanship. The finished panel markers shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 6.2), inspection shall be made of a completely fabricated panel marker for conformance to all provisions of this specification.

4.5 Quality Conformance Inspection

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final results.

4.5.1.1 Sampling for testing. The sample unit size for spectrophotometric shall be 1 yard, full width, put up on rolls and protected from exposure to light during preparation for shipment. The outside of the shipping pack shall be annotated as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Sample for Spectrophotometric Properties - Do Not Expose To Light

The sample size shall be in accordance with CCC-C-476

Table I - Component testing

Component	Characteristic	Rqmt ref.	Test method	No. Determinations per sample	Results reported as
Fluorescent nylon cloth (except black)	Shall permit high visability during daylight conditions.	3.3.1.1	1/		
	Shall show good fluorescent emission under ultraviolet excitation.	3.3.1.1	1/		
Fluorescent nylon cloth	Colorfastness to:				
	Dry cleaning	3.3.1.1	5620 1/	1	Pass or fail
	Dry crocking	3.3.1.1	5650 1/	1	Pass or fail
	Wet crocking	3.3.1.1	5650 1/	1	Pass or fail
"S" hook	Plating thickness	3.3.6	Std. comm'l	5	To nearest 0.0001 inch

1/ A certificate of compliance will be acceptable for these requirements.

4.5.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified herein. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:58Z
Check the source to verify that this is the currentversion before use.

Requirement and operation	Requirement paragraph
Width of binding for panel marker edges.	3.3.3
Width of binding for wind holes.	3.3.3
Holes punched for snap fasteners are smaller than outside diameter of the barrel for the button and eyelet.	3.5.2
Grommets on face side of panel marker.	3.5.2

4.5.3 Examination of end item. The end item shall be examined for defects listed in 4.5.3.2 and 4.5.3.3. The sample unit shall be one panel marker. The inspection level shall be II (see 6.5).

4.5.3.1 Classification of defects. All defects shall be classified as indicated below except those numbered 1 thru 23 in the classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.

Minor defect - When affecting appearance or serviceability, but not seriously

4.5.3.2 General defect. General defects shall be classified as follows:

Examine	Defect	Classification Critical	Major	Minor
Quality of cloth	Not type or material specified		101	
	Hole, tear or cut	1		
	Spot, streak, discoloration, or stain clearly noticeable when viewed at a distance of 6 feet	2		
	Abrasion marks, resulting in thin or weak place	3		
	Smash	4		
	Floats or skips: Multiple floats or skips 1/2 inch or more in combined direction		102	

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
	Multiple floats or skips less than 1/2 inch in combined direction			201
	More than 2 single floats or skips up to and including 1/2 inch in length			202
	Broken or missing yarns: Two or more contiguous 2 inches in length		103	
	Two contiguous less than 2 inches in length			203
	Single, 2 inches or more in length			204
	Uneven weaving throughout		104	
	Overall uncleanliness	5		
	Slough-off, jerked-in filling, slubs, slugs, gouts, 3 or more times the thickness of normal yarns	6		
	Color not as specified, or does not match approved standard shade or specified shade number		105	
	Uneven dyeing, shading, spottiness, poor penetration of dye.	7		
Thread	Not thread type, size or color specified		106	
	Cut, torn, chafed or otherwise damaged.	8		
Metal components (Grommets, Washers an "S" Hooks)	Not fabricated of material specified		107	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
	Does not have specified finish.		108	
	Evidence of rust or corrosion	9		
	Grommet or spur washer not specified type, class or size		109	
	Finish on "S" hook chipped or flaked	10		
	"S" hook not galvanized (zinc coated)		110	
	Area on "S" hook not galvanized (zinc coated)	11		
	Damaged, dented, bent, misshapen, or otherwise impaired	12		
	Broken, fractured, or cracked		111	
	Sharp burr, sliver or edge that may damage panel or cause injury	13		
Design	Any characteristic not as specified		112	
	Does not conform to specified drawing or approved sample		113	
Construction and workmanship	Any part not attached or not assembled as specified		114	
	Operation omitted		115	
	Operation not properly performed	14		
	Component missing		116	
	Component wrong type or size	15		
	Wrong type or class panel marker		117	
	Edges of binding, material frayed or scalloped	16		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
	Grommets and spur washers:			
	Improperly set, i.e., grommets not placed on face side of panel marker			205
	Insecurely clinched or otherwise defective	17		
	Not reinforced uith the tri-angular shaped patches		118	
	Improperly positioned or located	18		
	Clinched too tightly, cutting surrounding fabric		119	
	Less than 6 grommets and washers on panel		120	
	S" hooks:			
	Any end not closed	19		
	Large end of hook inserted through grommet in lieu of small end			206
	Less than 6 hooks for each panel marker.		121	
	Seams and stitches:			
	Incorrect seam or stitch type		122	
	Backstitching omitted, where required	20		
	Thread break backstitched less than 1 inch		123	
	Ends of stitching backstitched less than 1 inch (except where ends are held down by other stitching or turned under in a hem).			207
	Less than 6 stitches per inch		124	
	From 6 to 7 stitches per inch			208

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:58Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Critical	Major	Minor
	More than 10 stitches per inch			209
	Mend, patch, or darn	21		
	Needle chew which may develop into a hole		125	
	Loose or tight tension			210
	Open seam 1/2 inch or more in length.		126	
	Open seam up to 1/2 inch in length			211
	More than one thread end not trimmed			212
	Wrong stitching gage or wrong stitching margin			213
	Exposed raw edge	22		
	Seams irregular, skipped, or unevenly gaged	23		
Marking	Missing, incorrect, illegible, text incomplete, marking in wrong location, size or lettering not as specified, or color of marking not as specified			214

4.5.3.3 Finished measurements. Any dimension that is not within the tolerances specified herein shall be classified as a defect.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size,location, sequence or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of panel markers per container is more or less than required.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. The free end of each "S" hook shall be completely wrapped with 1-inch-wide-tape conforming to type III, class 1 of DDD-T-86 in such a manner as to cover the ends of the hook to prevent damage to the panel marker. Each panel marker shall be neatly folded to approximately 14 inches long by 10 inches wide and placed in an individual polyethlene bag measuring approximately 16 by 12 inches with a 1-inch lip along the open 12-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during the final heat sealing operation, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The panel markers shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Four panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class weather resistant, variety DW, grade V15C, size 1A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. When specified (see 6.2), twelve level B shipping containers (48 panel markers of one type and class only) shall be packed in a shipping container conforming to class weather resistant, variety DW, grade V15C, size 4, of MIL-B-17757, assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Four panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a shipping container with liner conforming to class domestic variety DW, size 1A of MIL-B-17757, assembled, and closed as specified in the appendix thereto. The fiberboard used in fabrication of the box and liner shall be grades 275 and 200 respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268

5.2.3 Commercial. Panel markers, of one type and class only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. Polyethylene bagged packages shall have the following information legibly printed or stamped directly on the bag or in black on a paper label inserted within the bag so as to permit ready identification.

Nomenclature (Type and Class)
Federal Stock Number
Contract Number
Contractor's Name

6. NOTES

(This section contains information of a general explanatory nature that may be helpful but is not mandatory.

6.1 Intended use. The panel markers covered by this specification are intended for use by shore party personnel during beach operations.

6.2 Acquisition requirements. Acquisition documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

(a) Title, number and date of this specification
(b) Type and class required (see 1.2)
(c) Whether first article is required (see 3.2)
(d) Number of panels in first article (see 3.2)
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
(f) When level A, method 2, packing is required (see 5.2.1.2)
(g) Acceptance criteria (see 6.5)

6.3 Standard Samples and shades. For information regarding availability of samples of the panel marker and of standard shades specified, address inquiry to the acquisition activity.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 4.0 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall control.

6.7 Subject (Key word) listing.
Beach
Shore Party

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing activity:
Navy - MC
Project No. 8345-N188

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

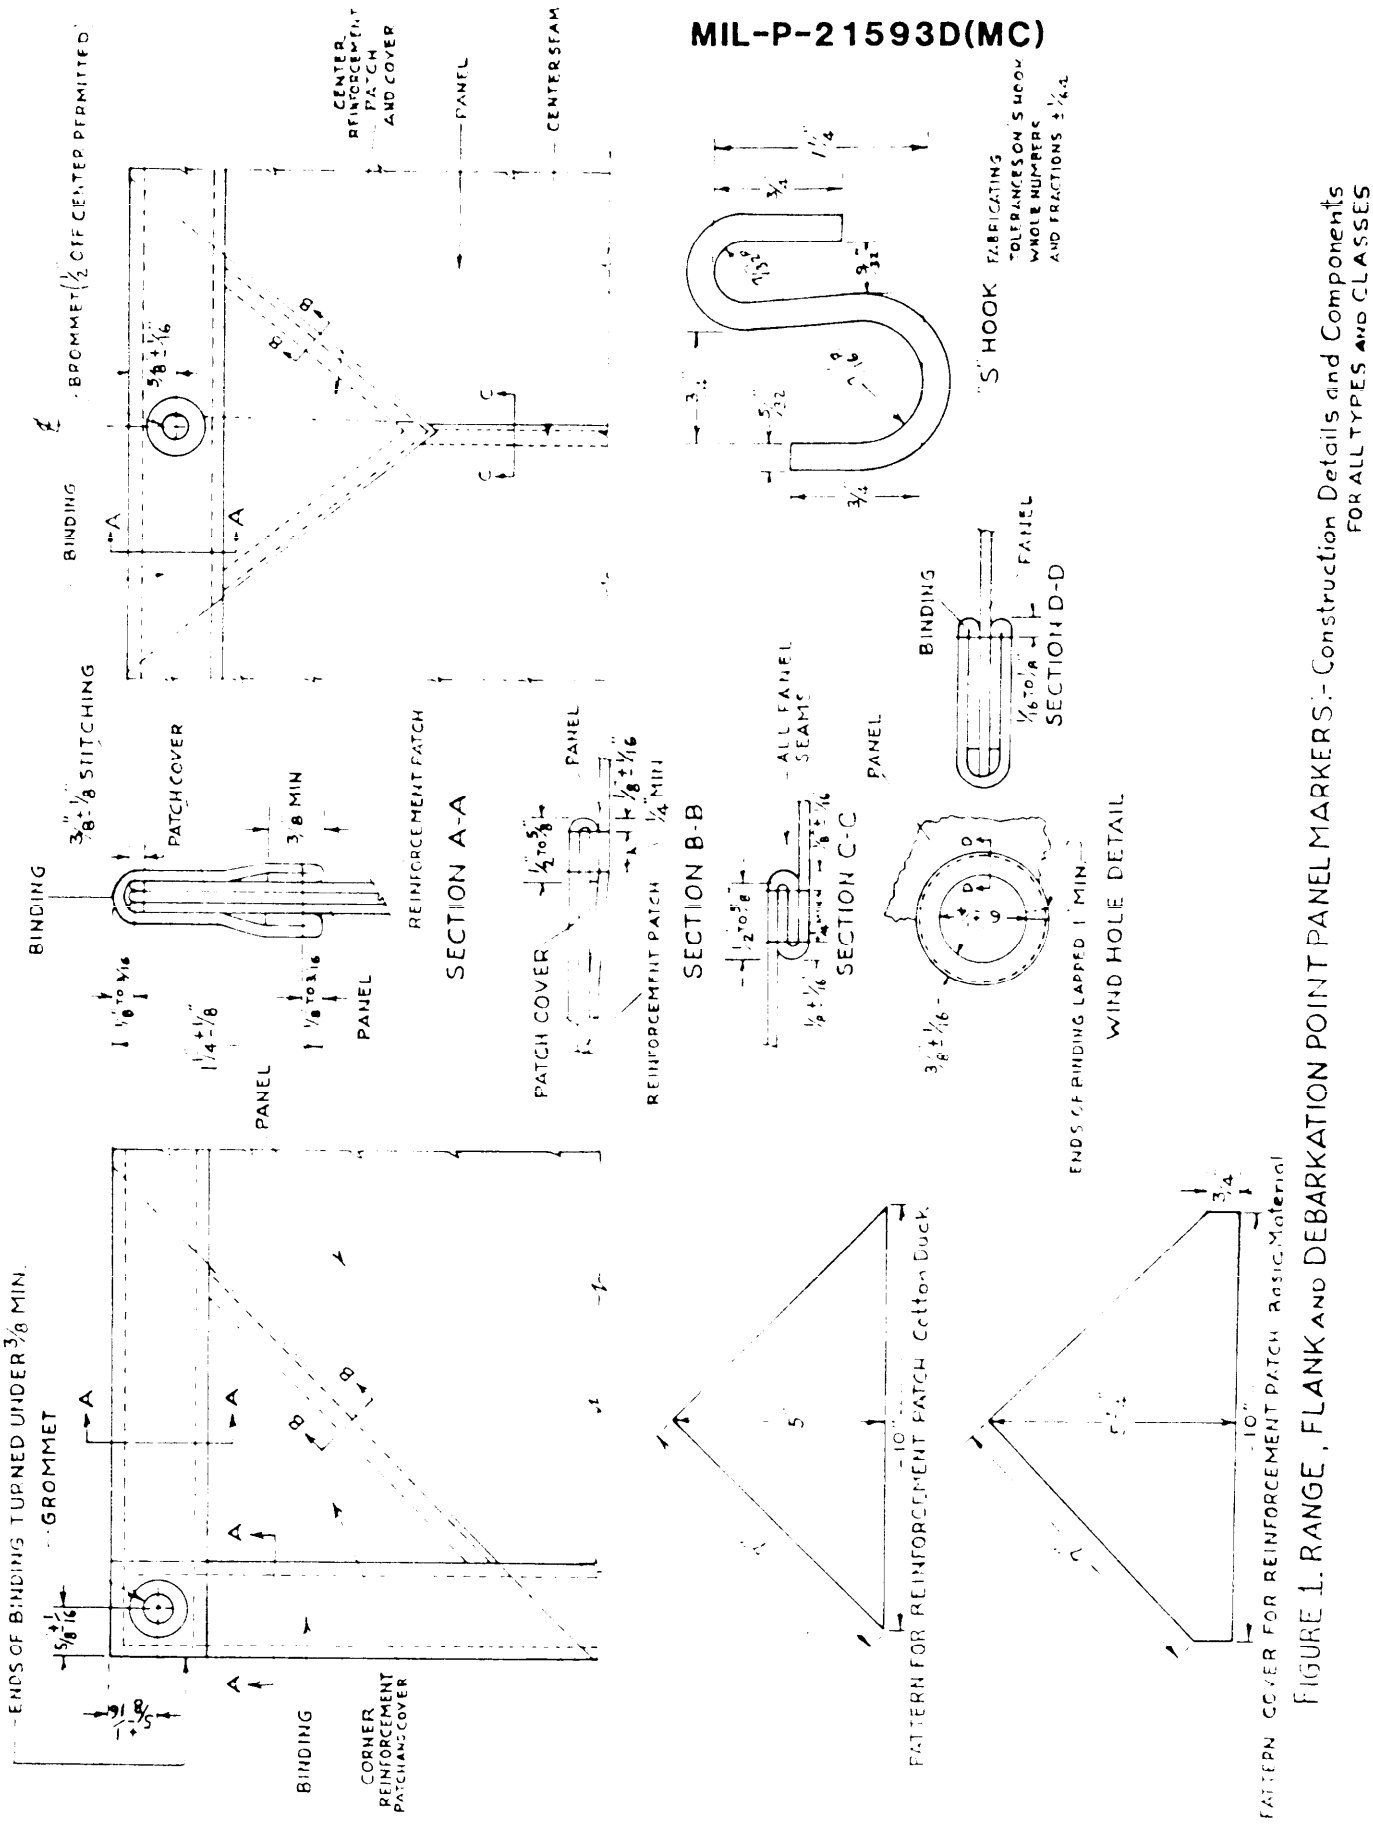


FIGURE 1. RANGE, FLANK AND DEBARKATION POINT PANEL MARKERS:- Construction Details and Components FOR ALL TYPES AND CLASSES

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:58Z
Check the source to verify that this is the current version before use.


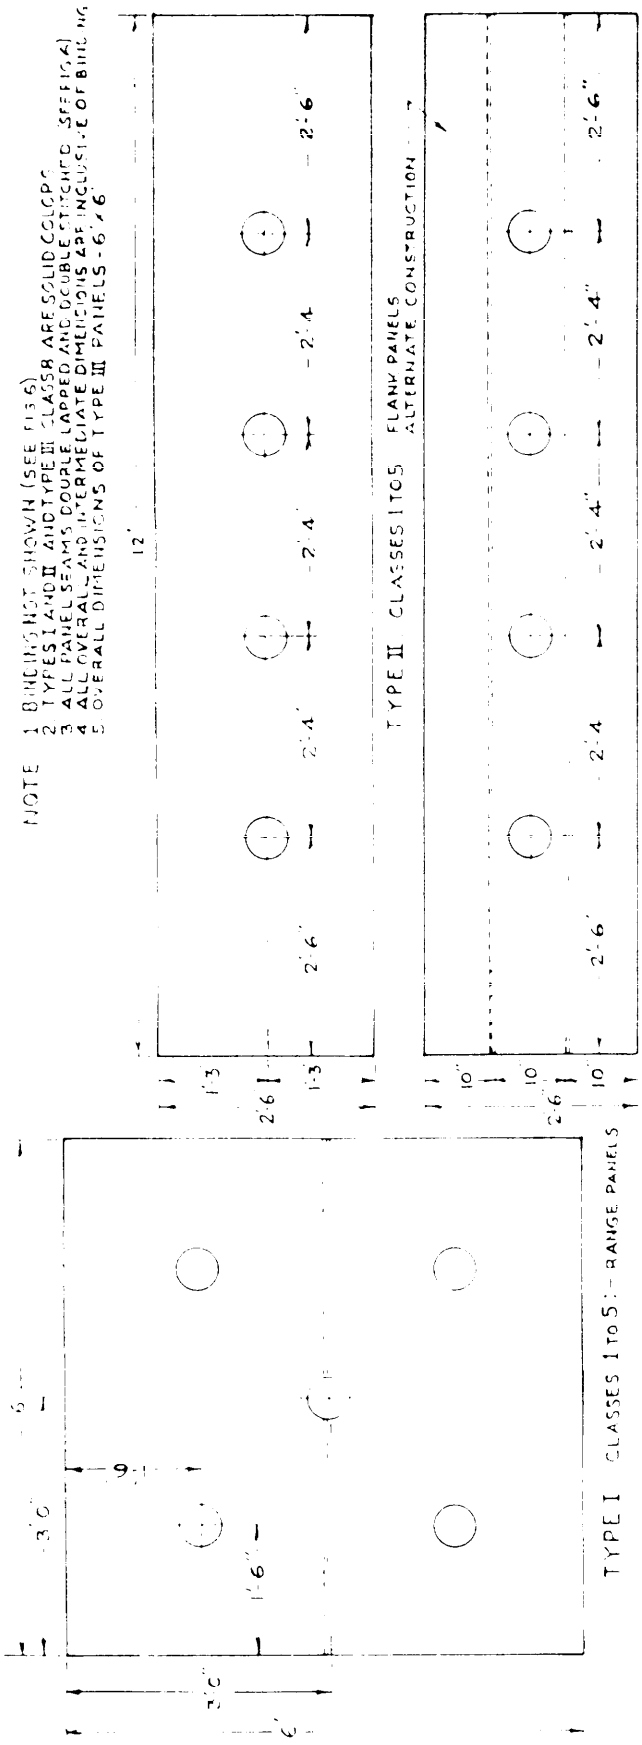


FIGURE 2. RANGE AND FLANK PANEL MARKERS:— Placement of Wind Holes and Stitching Requirements for TYPES I and II CLASSES 1 to 5

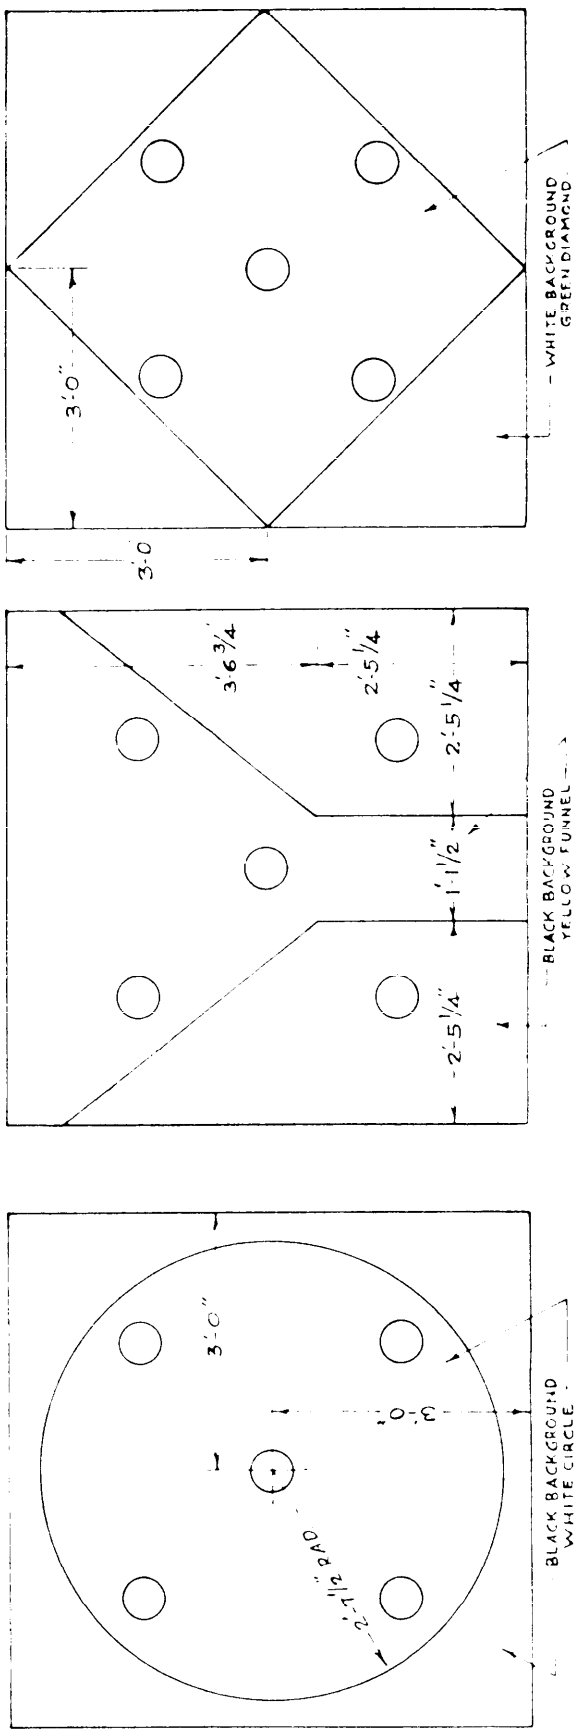

TYPE III CLASS 1: WATER Debarkation Point
TYPE III CLASS 2 GAS AND OIL Debarkation Point
TYPE III CLASS 3 TRACKED VEHICLES Debarkation Point

FIGURE 3. DEBARKATION POINT PANEL MARKERS:- Design and Color Details for TYPE III CLASSES 1 to 3

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:58Z
Check the source to verify that this is the current version before use.

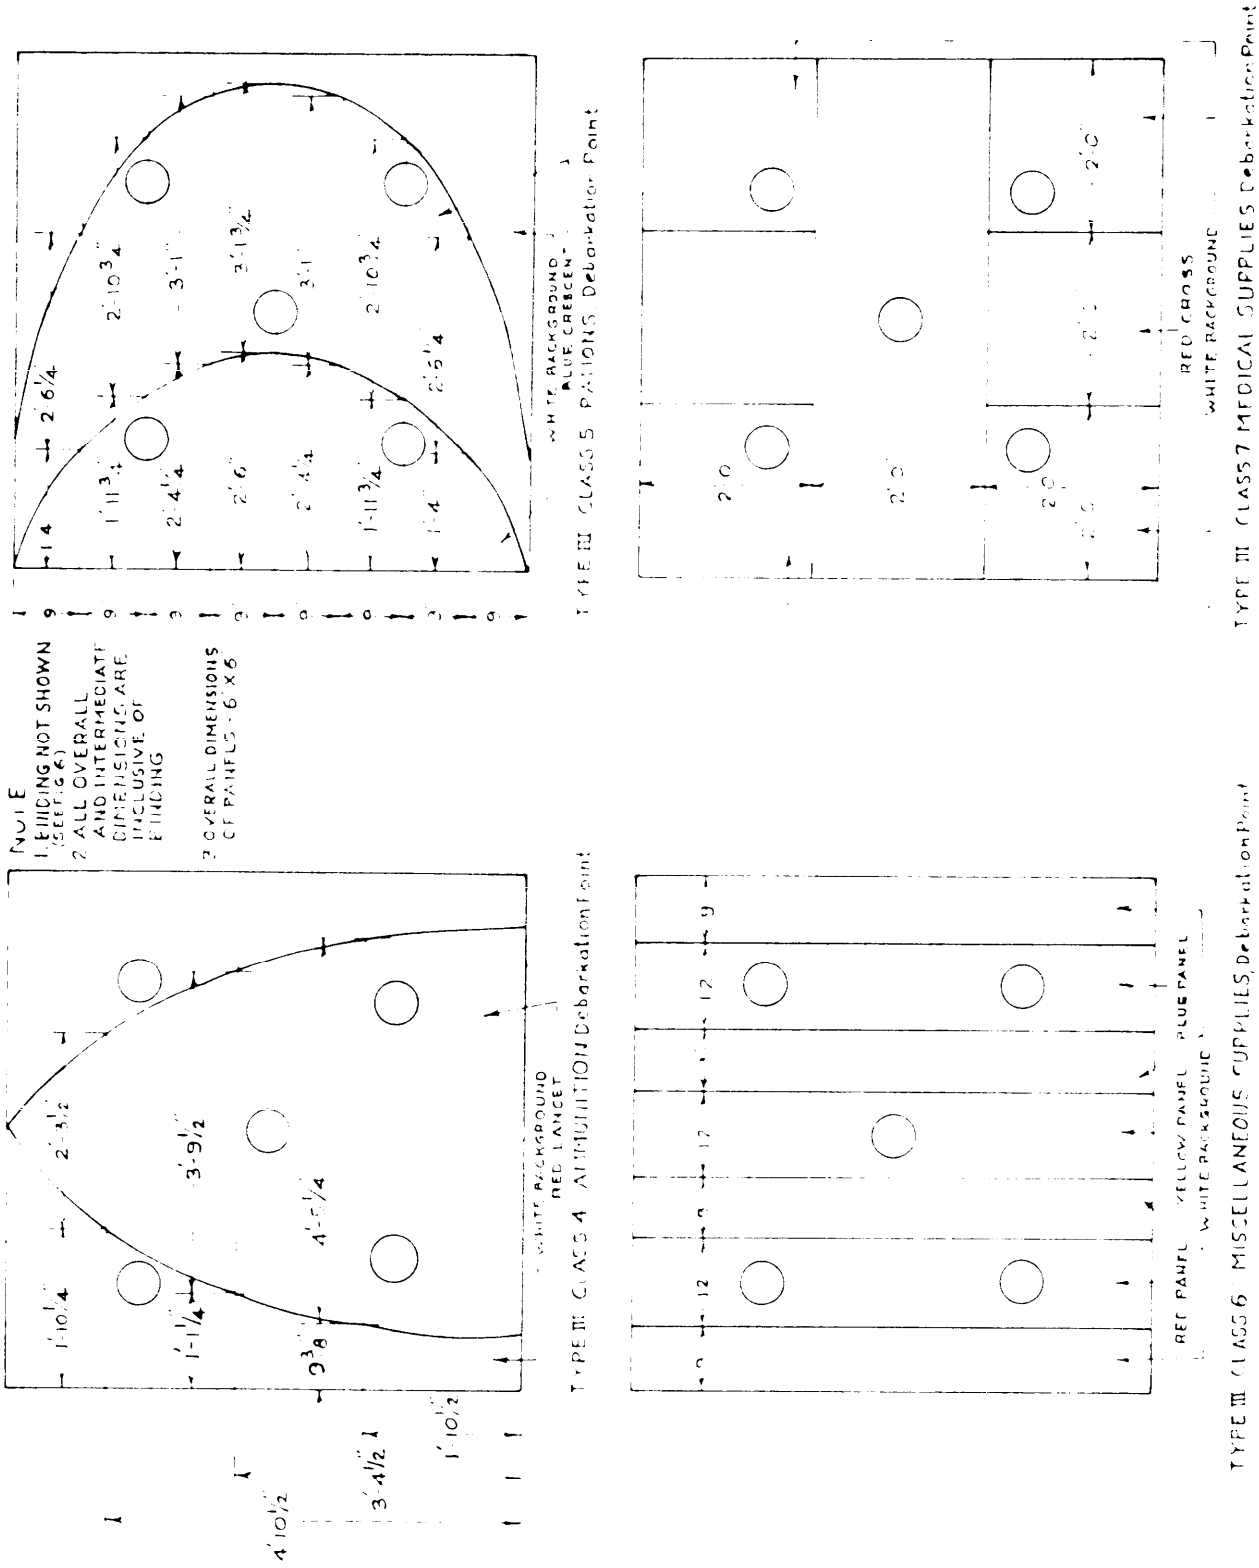


FIGURE 4. DEBARKATION POINT PANEL MARKERS Design and Color Details for TYPE III CLASSES 4 to 7

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:58Z
Check the source to verify that this is the current version before use.


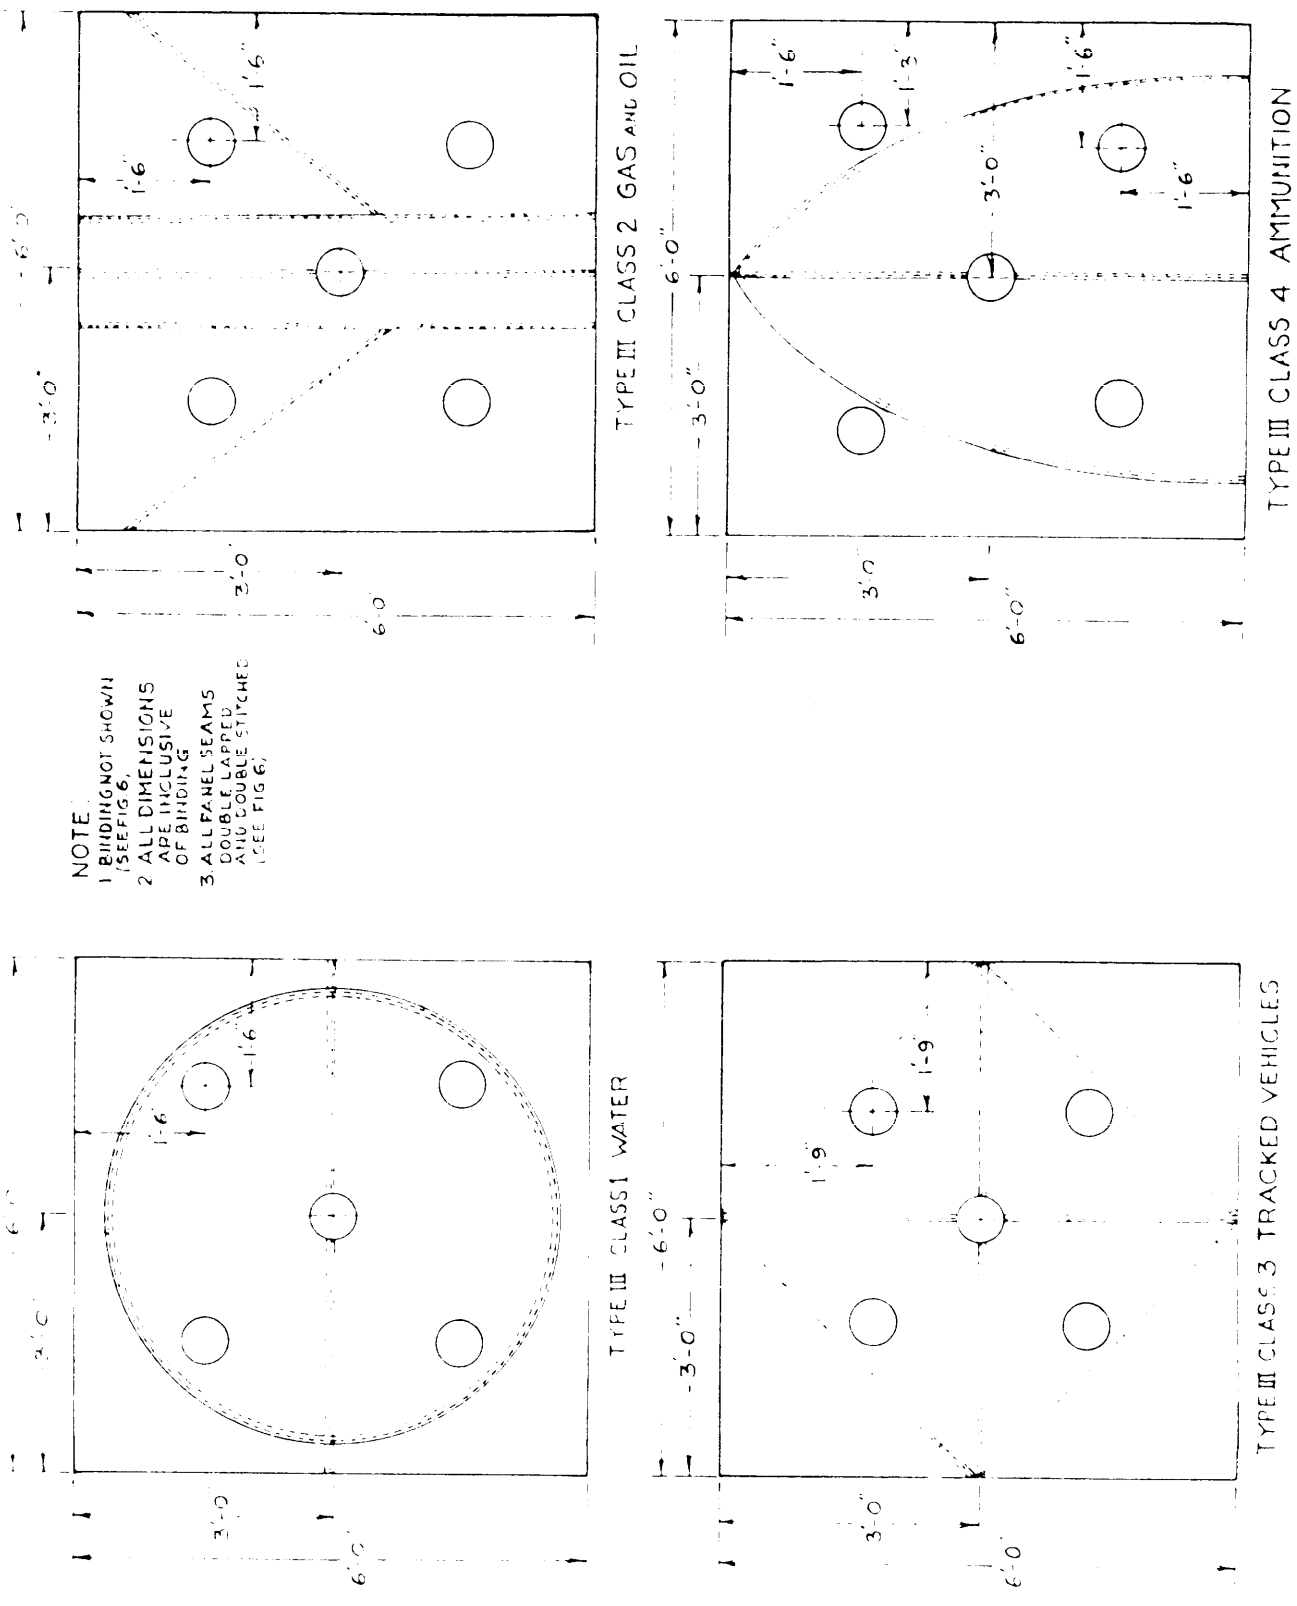



FIGURE 5. DEBARKATION POINT PANEL MARKERS - Placement of Wind Holes and Stitching Requirements for TYPE III, CLASSES 1 TO 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:58Z
Check the source to verify that this is the current version before use.

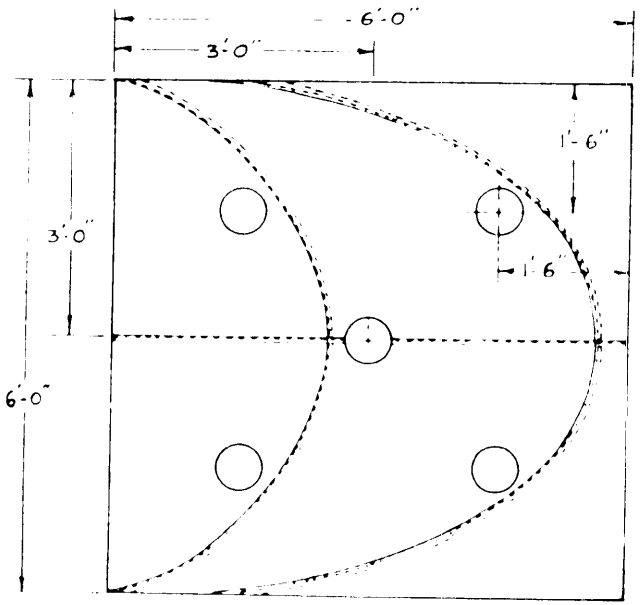


TYPE III CLASS 5: RATIONS

NOTE
1. BINDING NOT SHOWN (SEE FIG 6.
2. ALL DIMENSIONS ARE INCLUSIVE OF BINDING
3. ALL PANEL SEAMS DOUBLE LAPPED AND DOUBLE STITCHED (SEE FIG 6)

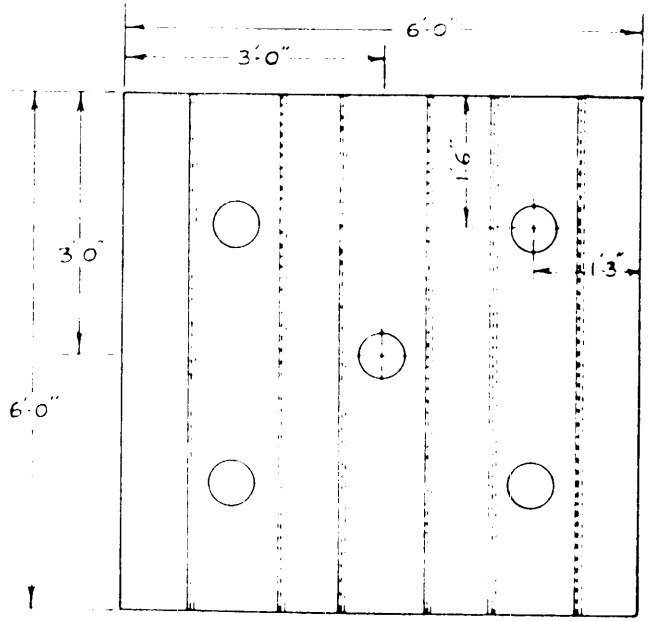

TYPE III CLASS 6: MISCELLANEOUS SUPPLIES

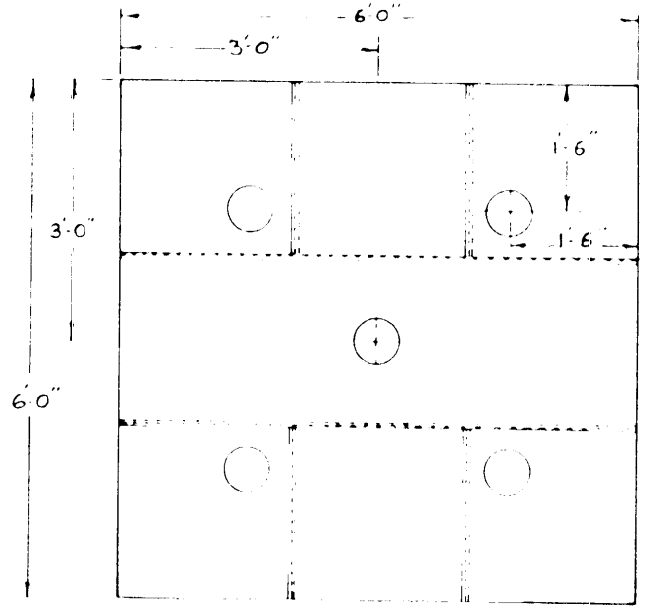

TYPE III CLASS 7: MEDICAL SUPPLIES

FIGURE 6. DEBARKATION POINT PANEL MARKERS: Placement of Wind Holes and Stitching Requirements for TYPE III CLASSES 5 TO 7

*U.S. GOVERNMENT PRINTING OFFICE: 1991-504-034/50170

Source: https://assist.dla.mil -- Downloaded: 2026/10-19T09:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-21593D(MC)	14 FEBRUARY 1991

3. DOCUMENT TITLE
Panel Markers: Range, Flank and Debarkation Point; Nylon and Flourescent

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 2204 -3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:58Z
Check the source to verify that this is the current version before use.