INCH-POUND


MIL-PRF-8565/5B (AS)
25 June 2001
SUPERSEDING
DOD-B-8565/5A(AS)
26 June 1987

PERFORMANCE SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, MAINTENANCE-FREE, 24-VOLT, 30-AMPERE-HOUR

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-8565.

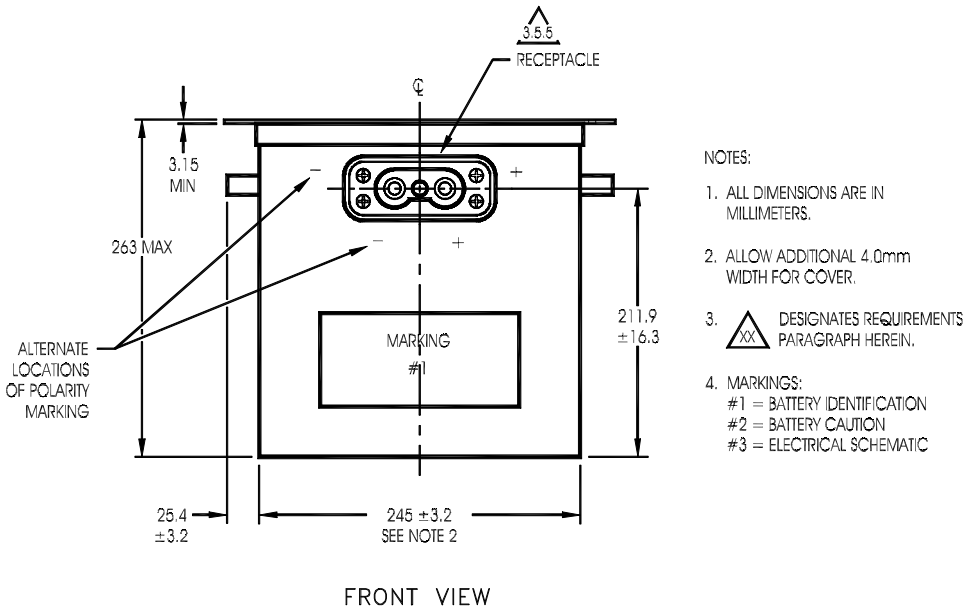


FRONT VIEW


FIGURE 1. Dimensions and configuration for PIN D8565/5-1.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

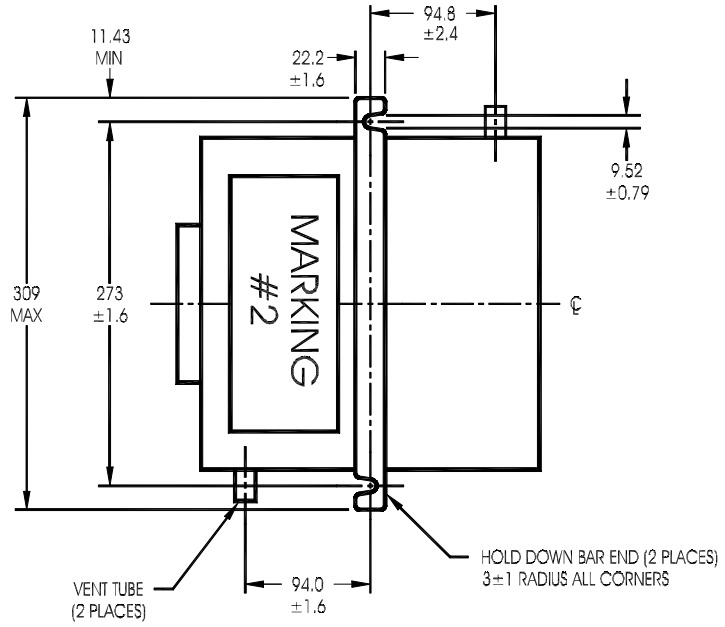

TOP VIEW

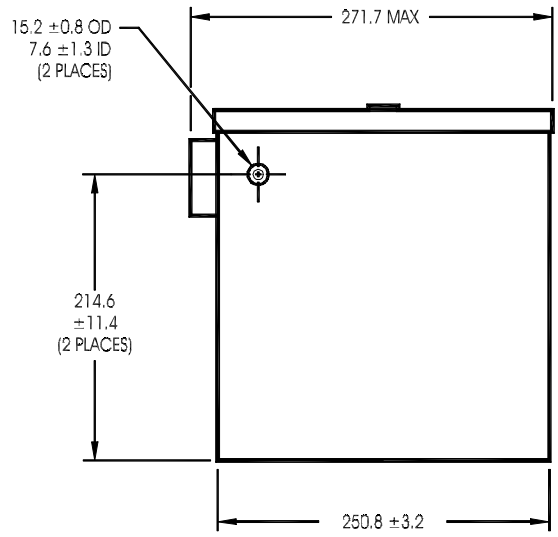

SIDE VIEW

FIGURE 1. Dimensions and configuration for PIN D8565/5-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

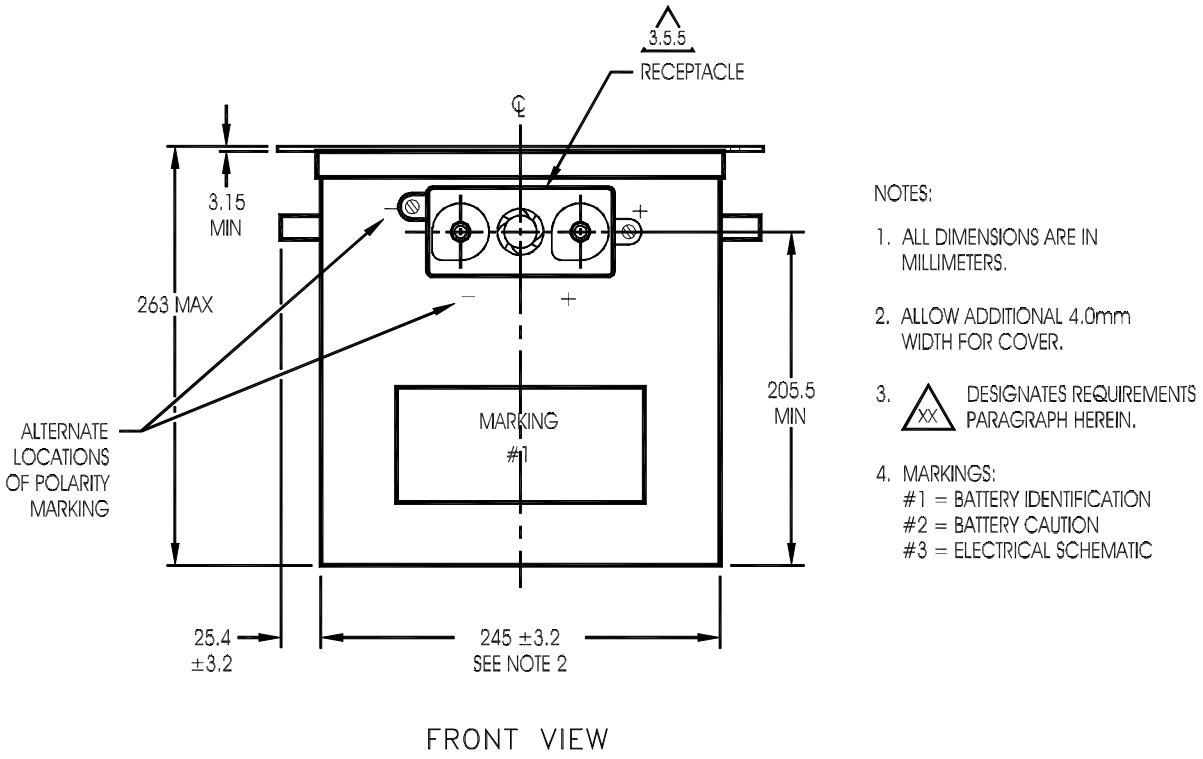


FIGURE 2. Dimensions and configuration for PIN D8565/5-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.


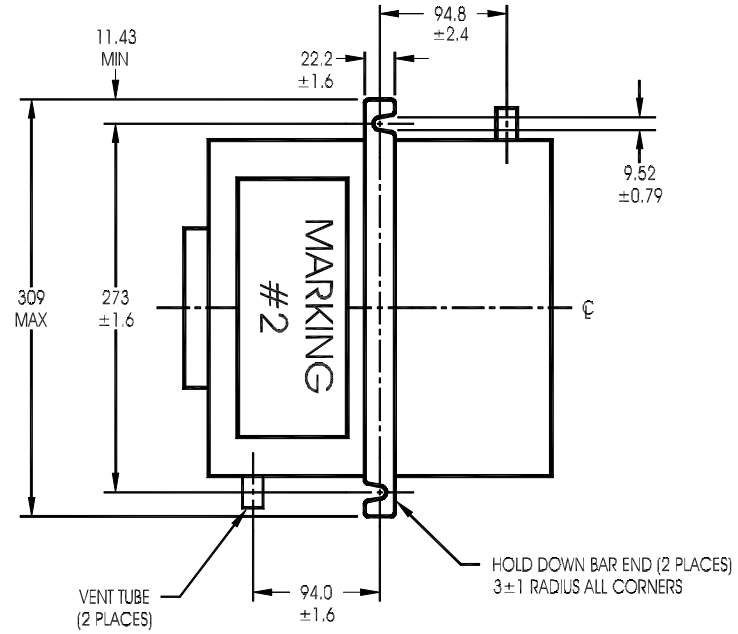


FIGURE 2. Dimensions and configuration for PIN D8565/5-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

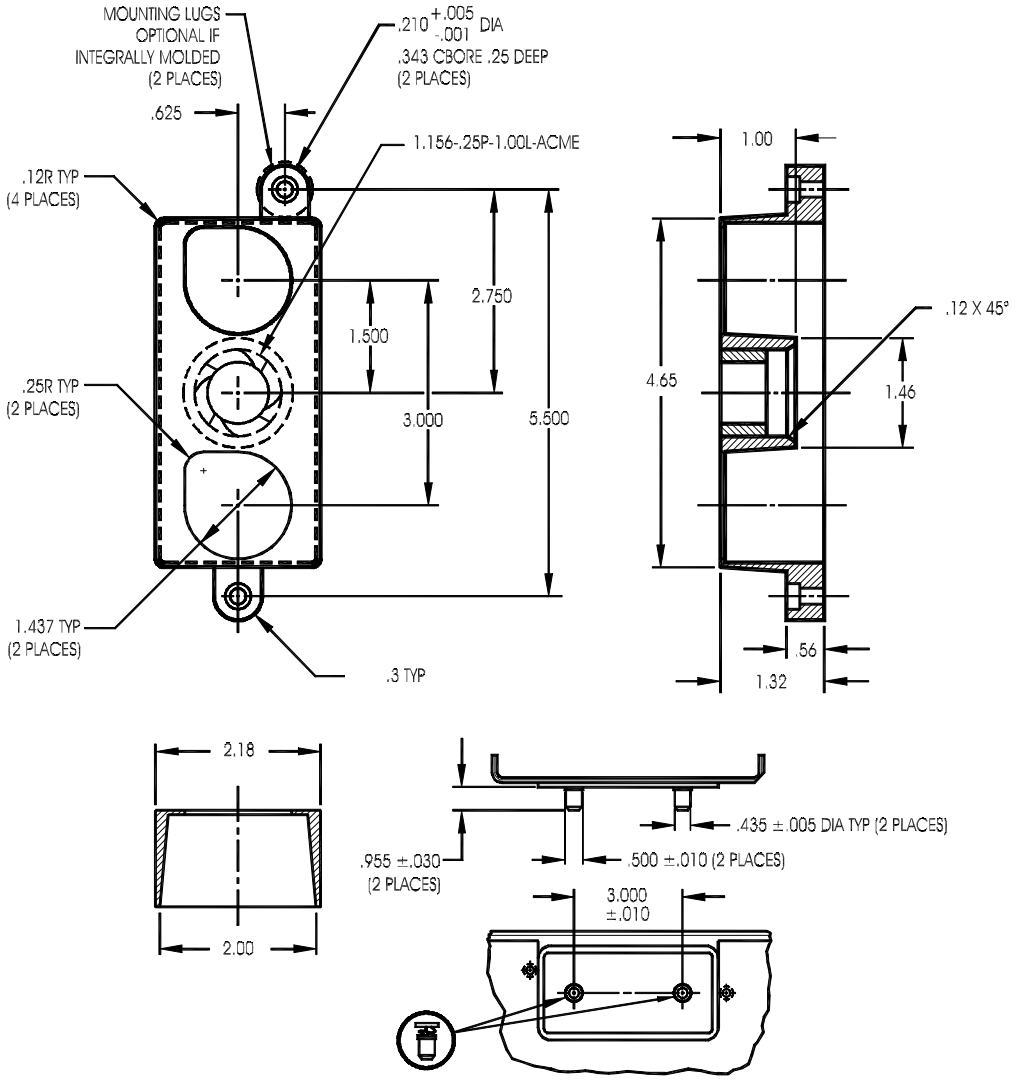

NOTES:

1. MATERIAL OR FINISH TO BE ACID-RESISTANT.
2. DIMENSIONS ARE IN INCHES.
3. DIMENSION TOLERANCES ARE:
   X.XX ±0.03
   X.XXX ±0.010
4. RECEPTACLE TO CASE ATTACHMENT METHOD OPTIONAL FOR NONMETALLIC CONTAINERS.
5. DRAFT ANGLES ALLOWED IN CONFORMANCE WITH COMMERCIAL DIE CASTING MACHINES.

FIGURE 3. Typical receptacle adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Part or identifying number. The part or identifying number (PIN) of the batteries covered by this specification sheet shall be D8565/5-1 for figure 1 and D8565/5-2 for figure 2.

2. Dimensions and weight. The dimensions of the battery shall be as shown on figures 1 and 2 of the specification sheet. The weight of the battery shall be not greater than 36.4 kilograms (see 3.8.3 and 4.5.3). In addition, the weight of any production battery shall vary by not greater than ± 1.0 kg from the average weight of the three approved qualification sample batteries but may not exceed the 36.4-kilogram limit.

3. Capacity. The rated capacity of the battery shall be not less than 30.0 ampere-hours (Ah). See 3.8.6 as modified herein.

4. Service life. The battery's service life (useful life) in aircraft shall be not less than 3 years. The battery shall require no scheduled maintenance during the 3 years (see 3.8.9, 4.5.10, and 6.15.10).

5. Qualification inspection and conformance inspection. Table I lists the required inspections.

6. MIL-PRF-8565 variance. The battery shall comply with MIL-PRF-8565 except as follows.

6.1 The following paragraphs are not applicable:
- 3.6.5 Marking for batteries with heaters.
- 3.8.16 Output performance.
- 3.8.17 Cold and hot temperature charge.
- 4.5.28 Output performance test.
- 4.5.29 Cold and hot temperature charge test.

6.2 Modify the following paragraphs:

3.5.5 Receptacles. Insert the following after the first sentence: "For D8565/5-1, the female receptacle (front side) shall be dimensionally equal to MS3509, style 1. For D8565/5-2, the female receptacle shall be dimensionally equal to figure 3 of the specification sheet. The receptacle may be integrally molded in the container."

3.8.6 Capacity and electrical performance. Delete the text and insert: "The rated capacity of the battery shall be not less than 30.0 ampere-hours. To meet the capacity requirement, each battery shall produce a potential of not less than 18.0 volts at not less than 60 minutes when connected to a 30.0-ampere load after being tested in accordance with 4.5.7 at 21°C (70°F) (30.0 Ah/1.0 hr/21°C/18.0 V at end of life). The battery's 1C-rate shall be 30 amperes (see requirement 3 of the specification sheet)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

3.8.7 Constant voltage discharge. Delete the first sentence and insert: "The battery shall produce not less than the current specified below after being tested in accordance with 4.5.8."

Temperature	Current (amperes) at 0.3 seconds	Current (amperes) at 5 seconds	Current (amperes) at 15 seconds	Current (amperes) at 30 seconds	Average current over the total 60 seconds
Room temperature (see 4.4.1)	875	830	750	700	684
-26.0 ± 2.0°C	625	580	500	420	430

4.5.10 Cycling test. In the third sentence, change "2.0-hour" to "4.0-hour".

6.3 Add the following paragraph:

"6.20 PIN supersession data. PIN supersession information and cross-references are indicated below:

"D8565/5-1 supersedes M83769/5-1 and M83769/5-2.
"D8565/5-2 supersedes M83769/1-1 and M83769/6-2."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

TABLE I. Qualification inspection and conformance inspection of batteries.

Test number	Examinations and tests	Qualification inspection					Conformance inspection		
		Sample number			Requirement paragraph	Test paragraph	Group A sample 1 100%	Group B sample number	
		1	2	3				1	2
1	INCOMING INSPECTION	X	X	X	3.8.1	4.5.1	X	X	X
2	VISUAL AND MECHANICAL EXAMINATION	X	X	X	3.5, 3.6, 3.8.2, table II	4.5.2	X	X	X
3	DIMENSIONS AND WEIGHT	X	X	X	Reqmt 2, 3.8.3	4.5.3	X[1/]	X	
4	DIELECTRIC STRENGTH AND INSULATION RESISTANCE TEST	X	X	X	3.7, 3.8.4	4.5.4	X[1/]	X	X
5	STRENGTH OF VENT TUBES TEST	X	X	X	3.7, 3.8.5	4.5.5	X[1/]	X	X
6	ELECTRICAL TEST PREPARATION	X	X	X	---	4.5.6		X	X
7	CAPACITY DISCHARGE	X	X	X	Reqmt 3, 3.8.6	4.5.7	X	X	X
8	CONSTANT VOLTAGE DISCHARGE	X	X		3.7, 3.8.7, reqmt (4) of table III	4.5.8	X	X	
9	STRENGTH OF RECEPTACLE TEST			X	3.7, 3.8.8	4.5.9			X
10	CYCLING TEST	X			3.8.9, reqmt (1) of table III	4.5.10		X	
11	CAPACITY DISCHARGE AT 49°C (120°F)		X		3.8.6, reqmt (2) of table III	4.5.11			X
12	CHARGE AND DISCHARGE TEST AT LOW TEMPERATURE		X		3.8.6, reqmt (3) of table III	4.5.12			X
13	DISCHARGE WHILE INVERTED		X		3.5.9, reqmt (5) of table III	4.5.13			X
14	ALTITUDE TEST		X		3.7, 3.5.9, 3.8.10	4.5.14			X
15	SHOCK TEST (BASIC DESIGN)				3.7, 3.8.10	4.5.15		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

TABLE I. Qualification inspection and conformance inspection of batteries - Continued.

Test number	Examinations and tests	Qualification inspection					Conformance inspection		
		Sample number			Requirement paragraph	Test paragraph	Group A sample 1 100%	Group B sample number	
		1	2	3				1	2
16	TEMPERATURE SHOCK TEST	X			3.7, 3.8.10	4.5.16		X	
17	TEMPERATURE RISE AND FLOAT TEST		X		3.7, 3.8.11, reqmt (1) of table III	4.5.17			X
18	BATTERY GAS EMISSION TEST		X		3.8.10, 3.8.12	4.5.18			
19	VIBRATION TEST		X		3.7, 3.8.10	4.5.19			
20	HUMIDITY TEST		X		3.7, 3.8.10	4.5.20			X
21	SALT FOG TEST	X			3.7, 3.8.10	4.5.21		X	
22	GROUND STORAGE TEST			X[2/]	3.8.13.1	4.5.22			
23	DEEP DISCHARGE RECOVERY TEST			X	3.7, 3.8.13.3	4.5.27			
24	PHYSICAL INTEGRITY AT HIGH TEMPERATURE TEST	X			3.7, 3.8.10, reqmt (1) of table III	4.5.23			
25	SHOCK TEST (CRASH SAFETY)			X	3.8.10, 3.8.15	4.5.25			
26	IMPACT RESISTANCE TEST (NONMETALLIC BATTERY CONTAINER)		[3/]		3.8.14	4.5.24			
27	WORMGEAR RETAINING PIN HARDNESS (D8565/5-1 ONLY)		[4/]		3.5.5	4.5.30			
28	SHELF LIFE TEST			X	3.8.9, 3.8.13.2	4.5.26			
29	FINAL EXAMINATION	X	X	X	3.7, 3.8.4	4.5.31		X	X

[1/] See sample information in test paragraph.
[2/] The manufacturer requesting qualification to this specification may submit an additional (fourth) test sample to expedite the qualification test program.
[3/] For nonmetallic battery container designs, two outer nonmetallic battery containers shall be furnished for inspection.
[4/] Five wormgear retaining pins shall be furnished for inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy - AS

Preparing activity:
Navy - AS

(Project 6140-N927)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-8565/5B	**2. DOCUMENT DATE** (*YYYYMMDD*) **20010625**

3. DOCUMENT TITLE
BATTERY, STORAGE, AIRCRAFT,MAINTENANCE-FREE, 24-VOLT, 30-AMPERE-HOUR

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include ZIP Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) DSN (*If applicable*)	**7. DATE SUBMITTED** (*YYYYMMDD*)

8. PREPARING ACTIVITY

a. NAME COMMANDER NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION	b. TELEPHONE (*Include Area Code*) (1) Commercial (732) 323-2947 (2) DSN 624-2947
c. ADDRESS (*Include ZIP Code*) CODE 414100B120-3 HIGHWAY 547 LAKEHURST, NJ 08733-5100	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:32Z
Check the source to verify that this is the current version before use.