
MILITARY SPECIFICATION SHEET

# CAPACITORS, VARIABLE, AIR DIELECTRIC (TRIMMER), STYLE CT06

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-92.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

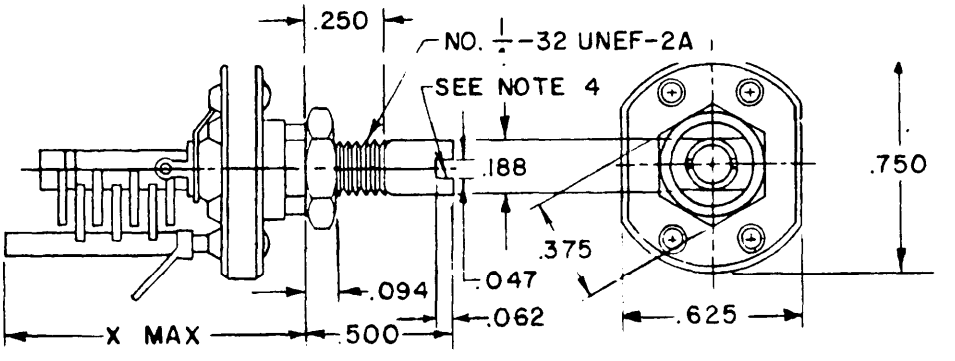


Ⓑ

| Part number | DC rated voltage | Capacitance | | X max |
|---|---|---|---|---|
| | | Minimum | Maximum | |
| | Volts | pF | pF | |
| CT06E004J | 500 | 1.3 | 4.0 | .625 |
| CT06E013J | 500 | 2.1 | 12.9 | .922 |
| CT06E017J | 500 | 2.4 | 16.8 | 1.047 |
| CT06E019J | 500 | 3.0 | 19.0 | 1.188 |

| INCHES | MM |
|---|---|
| .047 | 1.19 |
| .062 | 1.57 |
| .094 | 2.39 |
| .188 | 4.78 |
| .250 | 6.35 |
| .375 | 9.53 |
| .500 | 12.70 |
| .625 | 15.88 |
| .750 | 19.05 |
| .922 | 23.42 |
| 1.047 | 26.59 |
| 1.188 | 30.18 |

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm)
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Slot shall be parallel within ±10° to the edge of the rotating plate.

Ⓑ denotes change



Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Type: Screw-driver operated.

DC rated voltage: See table.

Barometric pressure:
Method 105, test condition B, MIL-STD-202.
Test voltage - 67 percent of dc rated voltage or an ac (rms) voltage equal to 48 percent of the specified dc rated voltage.

Quality factor (Q):
Method 306, MIL-STD-202.
Test frequency - Minimum capacitance and Q at 1 ±0.1 megahertz (MHz).
Q - greater than 1,500 at 1 MHz.

Torque:
Between 2.5 and 10 ounce-inches at $+85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$C, $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$C, and $+25^{\circ}\ \pm 5^{\circ}$C.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-0993-1)



Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the current version before use.