
MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE, AIR DIELECTRIC (TRIMMER), STYLE CT12

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-92.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

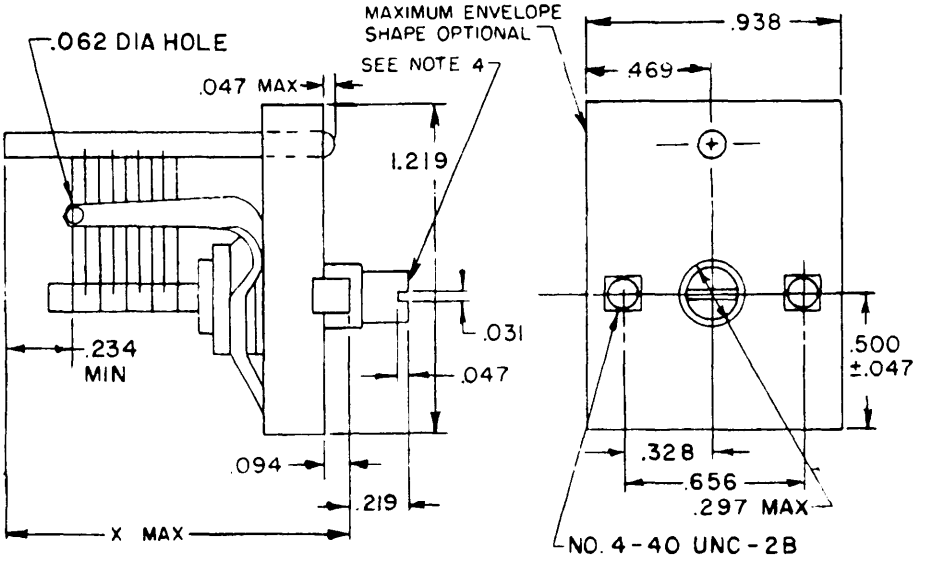

INCHES	MM
.031	.79
.047	1.19
.062	1.57
.094	2.39
.219	5.56
.234	5.94
.297	7.54
.328	8.33
.469	11.91
.500	12.70
.656	16.66
.938	23.83
1.000	25.40
1.094	27.79
1.188	30.18
1.219	30.96
1.250	31.75
1.375	34.93
1.500	38.10
1.625	41.28
1.688	42.88
1.750	44.45
1.906	48.41
1.938	49.23
1.969	50.01
2.000	50.80

(B)

Part Number	DC rated voltage	Capacitance		X
		Minimum	Maximum	max
	Volts	pF	pF	
CT12E042J	500	5.0	42	1.188
CT12E075J	500	6.0	75	1.500
CT12E099J	500	7.5	99	1.688
CT12E135J	500	9.0	135	1.938
CT12E143J	500	9.0	143	1.969
CT12F010J	600	3.0	10	.938
CT12F025J	600	4.0	25	1.094
CT12F042J	600	5.0	42	1.375
CT12F075J	600	6.0	75	1.625
CT12F099J	600	7.5	99	1.906
CT12G009J	700	4.0	9	1.000
CT12G023J	700	4.5	23	1.250
CT12G042J	700	5.5	42	1.750
CT12G075J	700	6.5	75	2.000

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Slot shall be parallel within ±10° to the edge of the rotating plate.

(B) denotes change.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Type: Screw-driver operated.

DC rated voltage: See table.

Barometric pressure:
Method 105, test condition B, MIL-STD-202.
Test voltage - 67 percent of dc rated voltage or an ac (rms) voltage equal to 48 percent of the specified dc rated voltage.

Quality factor (Q):
Method 306, MIL-STD-202.
Test frequency - Minimum capacitance and Q at 1 ±0.1 megahertz (MHz).
Q - greater than 1,500 at 1 MHz.

Torque:
Between 2.5 and 10 ounce-inches at $+85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C, $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C, and $+25 \pm 5^{\circ}$ C.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-0993-2)

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the current version before use.