
MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE, AIR DIELECTRIC (TRIMMER), STYLE CT13

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-92.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

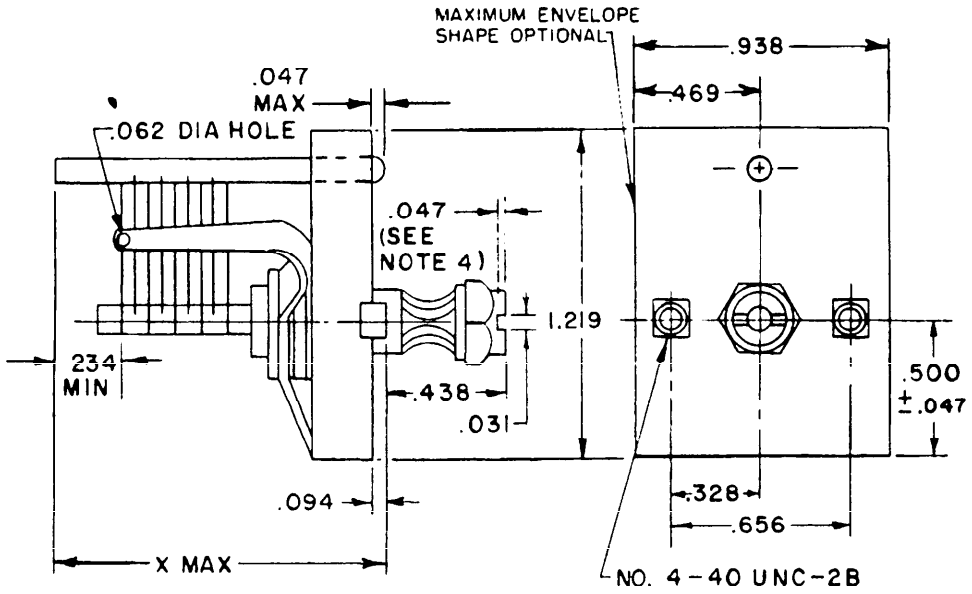

(B) Part Number	DC rated voltage	Capacitance Minimum	Capacitance Maximum	X max
	Volts	pF	pF	
CT13E042 J	500	5.0	42	1.188
CT13E075 J	500	6.0	75	1.500
CT13E099 J	500	7.5	99	1.688
CT13E135 J	500	9.0	135	1.938
CT13E143 J	500	9.0	143	1.969
CT13F010 J	600	3.0	10	.938
CT13F025 J	600	4.0	25	1.094
CT13F042 J	600	5.0	42	1.375
CT13F075 J	600	6.0	75	1.625
CT13F099 J	600	7.5	99	1.906
CT13G009 J	700	4.0	9	1.000
CT13G023 J	700	4.5	23	1.250
CT13G042 J	700	5.5	42	1.750
CT13G075 J	700	6.5	75	2.000

INCHES	MM	INCHES	MM
.031	.79	1.094	27.79
.047	1.19	1.188	30.18
.062	1.57	1.219	30.96
.094	2.39	1.250	31.75
.234	5.94	1.375	34.93
.328	8.33	1.500	38.10
.438	11.13	1.625	41.28
.469	11.91	1.688	42.88
.500	12.70	1.750	44.45
.656	16.66	1.906	48.41
.938	23.83	1.938	49.23
.968	24.59	1.969	50.01
1.000	25.40	2.000	50.80

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Slot shall be parallel within ±10° to the edge of the rotating plate.

(B) denotes change.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure and table.

Type: Screw-driver operated.

DC rated voltage: See table.

Barometric pressure:
Method 105, test condition B, MIL-STD-202.
Test voltage - 67 percent of dc rated voltage or an ac (rms) voltage equal to 48 percent of the specified dc rated voltage.

Quality factor (Q):
Method 306, MIL-STD-202.
Test frequency - Minimum capacitance and Q at 1 ±0.1 megahertz (MHz).
Q - greater than 1,500 at 1 MHz.

Torque:
Between 2.5 and 10 ounce-inches at $+85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C, $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C, and $+25^{\circ} \pm 5^{\circ}$ C.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-0993-3)

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the current version before use.