
MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE, AIR DIELECTRIC (TRIMMER), STYLES CT14 AND CT15

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-92.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

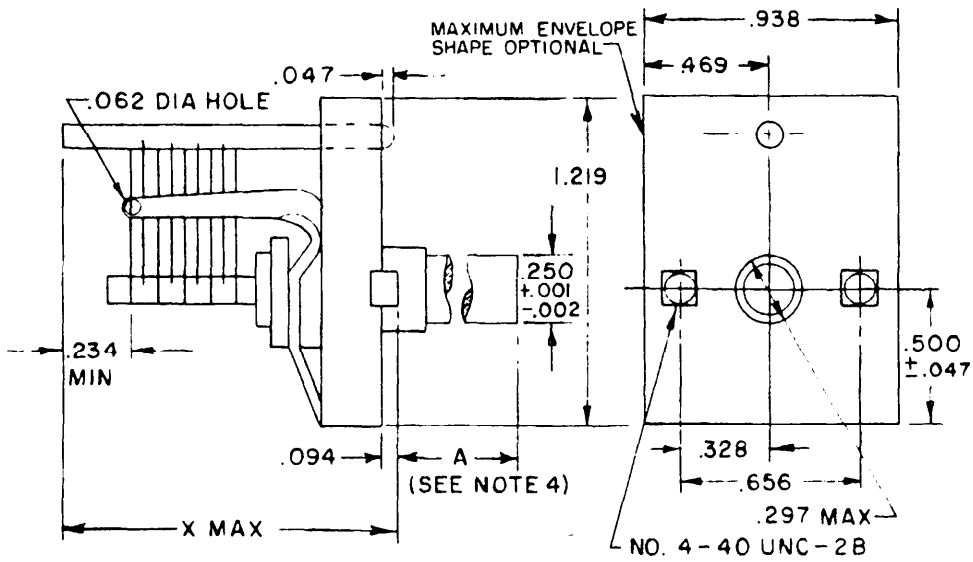

INCHES	MM
.001	.03
.002	.05
.047	1.19
.062	1.57
.094	2.39
.234	5.94
.250	6.35
.297	7.54
.328	8.33
.469	11.91
.500	12.70
.656	16.66
.938	23.83
1.000	25.40
1.094	27.79
1.188	30.18
1.219	30.96
1.250	31.75
1.375	34.93
1.500	38.10
1.625	41.28
1.688	42.88
1.750	44.45
1.906	48.41
1.938	49.23
1.969	50.01
2.000	50.80

(B)

Part 1/ number	DC rated voltage	Capacitance		X max
		Minimum	Maximum	
	Volts	pF	pF	
CT1-E042J	500	5.0	42	1.188
CT1-E075J	500	6.0	75	1.500
CT1-E099J	500	7.5	99	1.688
CT1-E135J	500	9.0	135	1.938
CT1-E143J	500	9.0	143	1.969
CT1-F010J	600	3.0	10	.938
CT1-F025J	600	4.0	25	1.094
CT1-F042J	600	5.0	42	1.375
CT1-F075J	600	6.0	75	1.625
CT1-F099J	600	7.5	99	1.906
CT1-G009J	700	4.0	9	1.000
CT1-G023J	700	4.5	23	1.250
CT1-G042J	700	5.5	42	1.750
CT1-G075J	700	6.5	75	2.000

1/ Complete part number will include an additional number to complete style.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimension 'A' for style CT14 is 1.000; Dimension 'A' for style CT15 is 1.500.

(B) denotes change

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Type: Screw-driver operated.

DC rated voltage: See table.

Barometric pressure:
Method 105, test condition B, MIL-STD-202.
Test voltage - 67 percent of dc rated voltage or an ac (rms) voltage equal to 48 percent of the specified dc rated voltage.

Quality factor (Q):
Method 306, MIL-STD-202.
Test frequency - Minimum capacitance and Q at 1 ±0.1 megahertz (MHz).
Q - greater than 1,500 at 1 MHz.

Torque:
Between 2.5 and 10 ounce-inches at $+85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$C, $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$C, and $+25^{\circ}\ \pm 5^{\circ}$C.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-0993-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:46Z
Check the source to verify that this is the current version before use.