
MILITARY SPECIFICATION SHEET

CAPACITORS, VARIABLE, AIR DIELECTRIC (TRIMMER), STYLE CT16

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-92.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

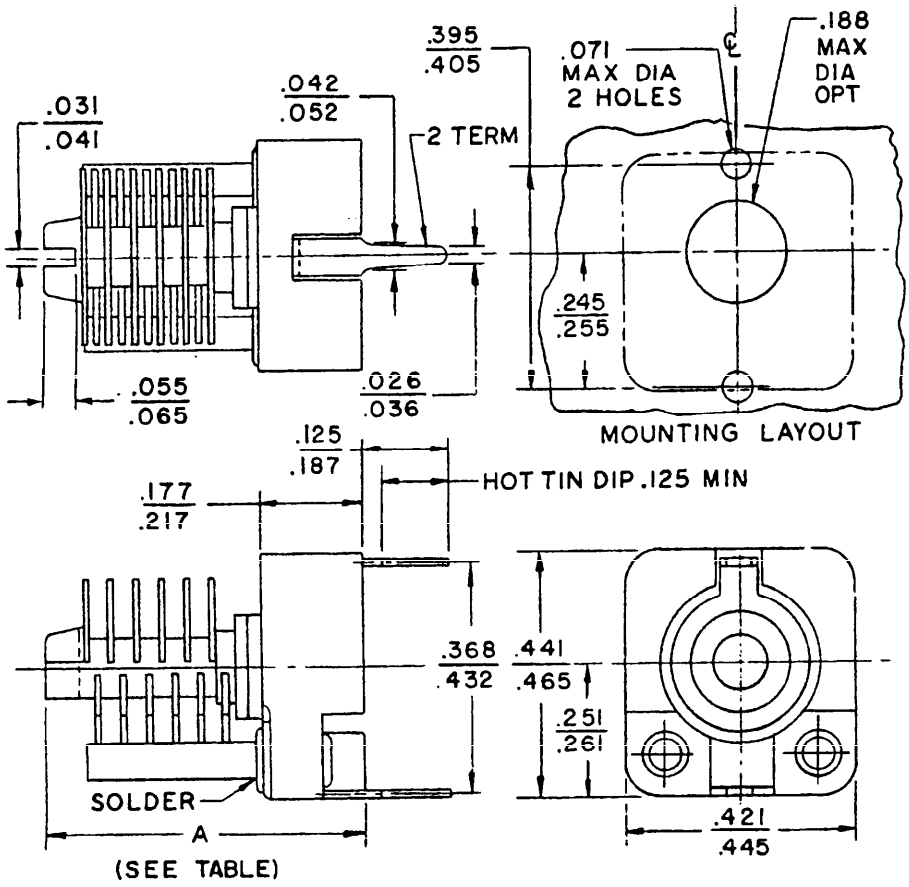

INCHES	MM
.026	.66
.031	.79
.036	.91
.041	1.04
.042	1.07
.052	1.32
.055	1.40
.065	1.65
.071	1.80
.125	3.18
.177	4.50
.187	4.75
.188	4.78
.217	5.51
.245	6.22
.251	6.38
.255	6.48
.261	6.63
.368	9.35
.395	10.03
.405	10.29
.421	10.69
.432	10.97
.441	11.20
.445	11.30
.465	11.81

Part number	Capacitance (pf)		Dimension A				DC rated voltage (volts)
			Inches		Millimeters		
	min	max	min	max	min	max	
CT16D005J	1.5	5	.453	.516	11.51	13.11	350
CT16D011J	2.0	11	.594	.656	15.09	16.66	350
CT16D016J	2.4	16	.750	.812	19.05	20.62	350
CT16E009J	1.7	9.1	.580	.595	14.73	15.11	500
CT16C017J	2.5	17.0	.780	.795	19.81	20.19	300

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Type: Screw-driver operated.

DC rated voltage: See table.

Construction: Milled plates.

Barometric pressure:
Method 105, MIL-STD-202, test altitude 80, 000 feet.
Test voltage - 30 percent of dc rated voltage or an ac (rms) voltage equal to 21 percent of the specified dc rated voltage.

Quality factor (Q):
Method 306, MIL-STD-202.
Test frequency - Minimum capacitance and Q at 1 ± 0.1 megahertz (MHz).
Q - greater than 1, 500 at 1 MHz for part numbers CT16D005J, CT16D011J, and CT16D016J.
Q - greater than 2, 000 at 1 MHz for part numbers CT16E009J, and CT16C017J.

Torque:
Between 2.5 and 10 ounce-inches at 85° $^{+3°}_{-0°}$ C, -55° $^{+0°}_{-3°}$ C, and 25° ±5° C.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy - AS, OS, CG
Air Force - 19

Preparing activity:
Army - EL

(Project 5910-0833-7)

Source: https://assist.dla.mil -- Downloaded: 20261 0-16T04:46Z
Check the source to verify that this is the current version before use.