MIL-R-93/21
24 APRIL 1959
SUPERSEDING
MIL-R-93/2C
2 FEBRUARY 1959

MILITARY SPECIFICATION

RESISTORS, FIXED, WIREWOUND (ACCURATE). STYLE RB15

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for style RB15 accurate, wirewound, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

MILITARY


MIL-R-93 — Resistors, Fixed, Wirewound (Accurate), General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with Specification MIL-R-93, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

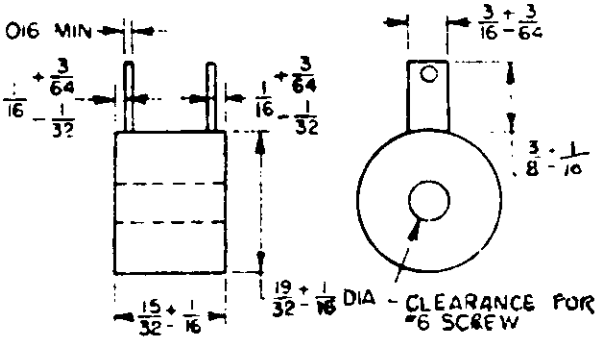

ALL DIMENSIONS IN INCHES

FIGURE 1. *Style RB15 resistor.*

3.3 Minimum resistance value. Minimum resistance value shall be 0.1 ohm.

3.4 Maximum resistance value (based on use of 0.001 inch nominal diameter wire with a nominal resistivity of 800 ohms per circular mil foot). Maximum resistance value shall be 0.400 megohm.

3.5 Maximum resistance value (based on

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:48Z
Check the source to verify that this is the current version before use.

use of 0.0015 inch nominal diameter wire with a nominal resistivity of 800 ohms per circular mil foot). Maximum resistance value shall be 0.225 megohm.

3.6 Power rating. Power rating shall be ¼ watt.

3.7 Maximum voltage. Maximum voltage shall be 300 volts direct current or peak.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with Specification MIL-R-93.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-R-93.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in Specification MIL-R-93 are applicable to this specification.

6.2 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—Signal Corps
Navy—Bureau of Ships
Air Force

Preparing activity:
Army—Signal Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:48Z
Check the source to verify that this is the current version before use.