MIL-R-93/5F
22 November 1968
SUPERSEDING
MIL-R-93/5E
28 December 1965

MILITARY SPECIFICATION

RESISTORS, FIXED, WIRE-WOUND (ACCURATE), STYLE RB18

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION (SEE 6.3).

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for style RB18, accurate, wire-wound, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-93 - Resistors, Fixed, Wire-wound (Accurate), General Specification for.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-93, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.


3.3 Minimum resistance value. The minimum resistance value available with each applicable tolerance shall be as follows:

Tolerance (± percent)	Symbol	Minimum resistance (ohms)
0.05	A	100
0.10	B	10
0.50	D	1.0
1.00	F	1.0

3.4 Maximum resistance value (based on use of 0.001-inch nominal diameter wire with a nominal resistivity of 800 ohms per circular mil foot). Maximum resistance value shall be 3.01 megohms.

3.5 Power rating. Power rating shall be 3/4 watt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:48Z
Check the source to verify that this is the current version before use.

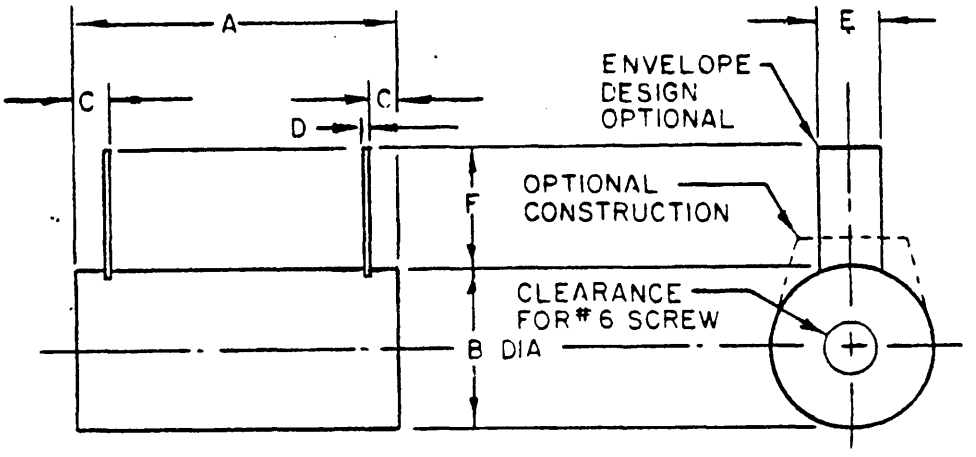

Dim	Inches	Millimeters
A	1.250 ±.062	31.75 ±1.57
B	.750 ±.188	19.05 ±4.78
C	.078 +.047, -.016	1.98 +1.19, -.41
D	.016 Min	.41 Min
E	.188 ±.047	4.78 ±1.19
F	.375 ±.062	9.53 ±1.57

NOTE:
Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style RB18 resistor.

Source: https://assist.dla.mil -- Downloaded: 20260-16T04:48Z
Check the source to verify that this is the current version before use.

3.6 Maximum voltage. Maximum voltage shall be 600 volts direct current or peak.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-R-93.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-93.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-R-93 are applicable to this specification.

6.2 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

* 6.3 Authorized use. The resistors specified herein are not for use in design after date of this specification. They are authorized for use in design contracts effective prior to or on the date of this specification, and to support existing military equipment.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME, AV
Navy - MC
Air Force - 19

Preparing activity:
Army - EL

(Project 5905-0660-3)

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:48Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-R-93/5F Resistors,Fixed,Wire-wound(Accurate),Style RB18

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:48Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- TD-SS
Fort Monmouth, New Jersey 07703

FOLD

To detach this fc cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:48Z
Check the source to verify that this is the current version before use.