MIL-R-93/8B(EL)
12 June 1970
SUPERSEDING
MIL-R-93/8A
18 January 1965
NOTICE 2
14 June 1968

MILITARY SPECIFICATION

RESISTORS, FIXED, WIRE-WOUND (ACCURATE), STYLE RB44

INACTIVE FOR DESIGN AFTER 14 JUNE 1968 (SEE 6.3).

This specification is for use by the U.S. Army Missile Command only; for replacement purposes only.

1. SCOPE

1.1 This specification covers the detail requirements for style RB44, accurate, wire-wound, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-93 - Resistors, Fixed, Wire-wound (Accurate), General Specification for.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-93, and as specified herein.

3.1.1 Characteristic. This style is available in characteristic C only.


3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Minimum resistance value. The minimum resistance value available with each applicable tolerance shall be as follows:

Tolerance (±percent)	Symbol	Minimum resistance (ohms)
0.10	B	10
0.50	D	0.1
1.00	F	0.1

3.4 Maximum resistance value (based on use of 0.001-inch nominal diameter wire with a nominal resistivity of 800 ohms per circular mil foot): Maximum resistance value shall be 0.37 megohm.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T04:49Z
Check the source to verify that this is the current version before use.

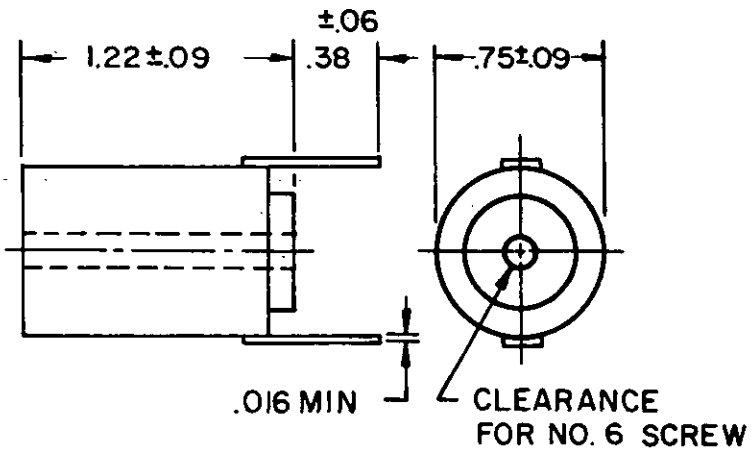

INCHES	MM
.016	.41
.06	1.52
.09	2.29
.38	9.65
.75	19.05
1.22	30.99

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style RB44 resistor.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T04:49Z
Check the source to verify that this is the current version before use.

3.5 Power rating. Power rating shall be .5 watt for tolerance F. For all other, tolerance power is derated by a factor of 1/2.

3.6 Maximum voltage. Maximum voltage shall be 250 volts direct current or peak.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-93, and as specified herein.

4.1.1 Qualification inspection. Not applicable to this specification.

4.1.2 Quality conformance inspection. Table VIII, group A inspection, and table IX, group B inspection are applicable to this specification. Group C, table XI, is not required.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-93.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-R-93 are applicable to this specification.

6.2 Supplementary insulation. Where potential to ground is over 250 volts, supplementary insulation should be provided.

6.3 Substitution data. The resistors specified herein are not for use in design after 14 June 1968. They are authorized for use in design contracts effective prior to or on the date of this specification, and to support existing military equipment. Characteristic C resistors are a replacement substitute for characteristic A resistors.

Custodian:
Army - EL

Review activity:
Army - MI
DSA - ES

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5905-A242-2)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-098/5-6673

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:49Z
Check the source to verify that this is the current version before use.