MILITARY SPECIFICATION

BOWL, BAPTISMAL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of chrome-plated baptismal bowl (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-C-320 - Chromium Plating (Electrodeposited)
PPP-B-566 - Boxes, Folding Paperboard
PPP-B-636 - Box, Fiberboard
PPP-B-676 - Boxes, Setup

MILITARY

MIL-P-116 - Preservation, Methods of

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWING

ARMY NATICK LABORATORIES

14-1-17 - Bowl, Baptismal; Assembly

(Note: Miniature copy of Drawing 14-1-17, identified as figure 1, is attached for information purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. - When specified (see 6.2), before production is commenced, a baptismal bowl covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorized the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Materials. - The materials shall conform to the applicable specification and standards referenced hereinafter. When materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice.

3.2.1 Brass. - The brass shall be commercial yellow brass.

3.3 Construction. - The construction of the baptismal bowl assembly shall conform to the requirements of this specification and Drawing 14-1-17. The bowl and base shall be fabricated from brass specified in 3.2.1.

3.4 Finish. - The finish for the baptismal bowl shall be chrome-plated to a minimum thickness of 0.00001 and a maximum thickness of 0.00005 inches in accordance with class 1, type I of QQ-C-320.

3.5 Marking for identification. - The baptismal bowl shall be permanently and legibly marked with the manufacturer's name or readily identifiable trade mark.

3.6 Workmanship. - The baptismal bowl shall be free from defects such as fractures, splits, punctures, dents, creases, or malformation. The finished components shall be free from sharp protrusions or edges, burrs or slivers.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. - When a preproduction sample is required, it shall be examined for defects specified in table I and dimensions specified.

4.3 Sampling for inspection and acceptance. - Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. - In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Examination of component and material. - Examination of components and materials not covered by referenced documents shall be certified by the manufacturer or examined for conformance to the requirements of this specification.

4.3.2 End item inspection. - A lot shall consist of all baptismal bowls offered for inspection at one time. The sample unit shall be one completely fabricated baptismal bowl.

4.3.2.1 Visual examination. - Examination of the end item shall be made for the defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I - Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not chrome-plated	X	
	Damaged due to handling	X	
Construction and workmanship(applicable to all components and assemblies)	Top and bottom edges not rolled	X	
	Fractures, splits, punctures or dents	X	
	Any component malformed	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

TABLE I - Classification of defects (Cont'd)

Examine	Defect	Classification Major	Classification Minor
Soldering	Not adherent or incomplete	X	
	Not clean, i.e., flux or flux residue not removed.		X
	Pinholes in solder		X
Marking for identification	Missing, incorrect or illegible		X

4.3.2.2 Dimensional examination. - Examination shall be made of the end item for compliance with dimensions specified. Any noncompliance with specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. - An examination shall be made to determine that preservation and packaging, packing and markings comply with the requirements of section 5 of this specification. Defects shall be scored as specified in table II. The lot shall be the number of containers offered for delivery at one time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE II. - Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing or damaged
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping or tape banding, bulging or distortion of containers; die-cut pads or forms inadequate, improper, or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. - Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. - Each bowl shall be completely wrapped in two thicknesses of tissue paper. The wrapped bowl shall then be packaged in a snug-fitting folding or setup paperboard box conforming to variety 1, style III or VIII, type B, class a of PPP-B-566, or type I, variety 1, class A, style 1 or 2 of PPP-B-676, respectively. Closure shall be in accordance with the appendix of the applicable box specification (see 6.3).

5.1.2 Level C. - Bowls shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. - Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. - Twenty-four bowls, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat steel strapping or tape banding shall be in accordance with the appendix of the container specification.

5.2.2 Level B. - Unless otherwise specified (see 5.2.2.1), twenty-four bowls, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of the container specification.

5.2.2.1 When specified (see 6.2), shipping containers shall be made from weather-resistant fiberboard specified in 5.2.1.

5.2.3 Level C. - Bowls, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - The baptismal bowl covered by this specification is intended for use during Baptismal Ceremonies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).

6.3 The method of packaging, referred to in 5.1.1, is similar to method III of MIL-P-116.

6.4 Supersession data. - The requirement for the baptismal bowl covered by this specification was formerly included in Military Standard MS 16005.

Custodians:

Army - GL
Navy - PE
Air Force - 28


Preparing activity:
Army - GL
Project No. 9925-0096


Review activities:


Navy - PE
Air Force - 28
Armed Forces Chap Bd.

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

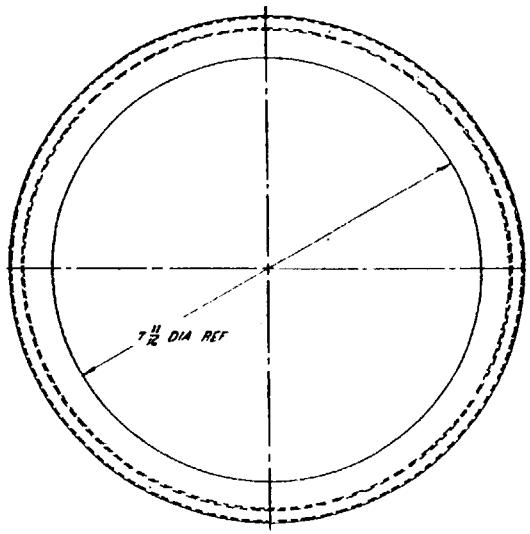

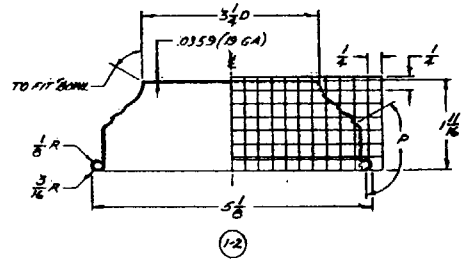

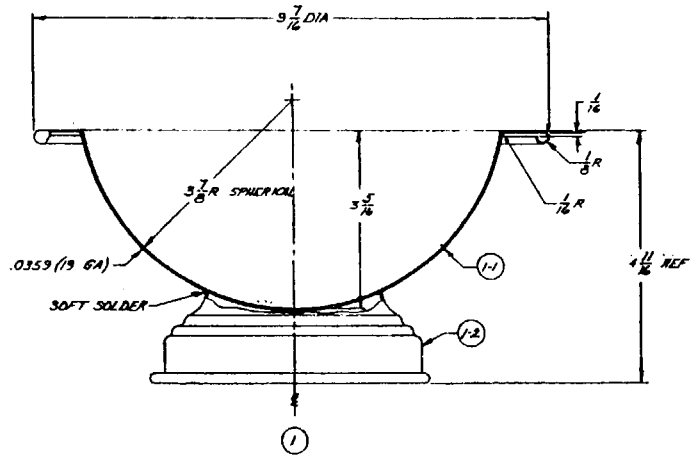

ITEM	QTY	DESCRIPTION	MATERIAL	MASK SPEC	STOCK NO.
1-2	1	BASE	BRASS, CHROMIUM PLATED		14-1-11
1-1	1	BOWL	BRASS, CHROMIUM PLATED		14-1-12
1	1	ASSEMBLY			14-1-12

STOCK LIST

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 14-1-11, REVISION NUMBER ——, DATED 3 DEC 63. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE – 1

BOWL, BAPTISMAL;

ASSEMBLY COMPLETE

MIL-B-43401

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Bowl, Baptismal - MIL-B-43401

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:20Z
Check the source to verify that this is the current version before use.