INCH-POUND

MIL-C-43419E(GL)
12 April 1989
SUPERSEDING
MIL-C-43419D(GL)
26 September 1983

MILITARY SPECIFICATION

CAP, GARRISON, MEN'S POLYESTER/WOOL, ARMY GREEN 344

This specification is approved for use by the U.S. Army Natick Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a garrison cap made of polyester-wool blend material for male personnel.

1.2 Classification. The cap shall be of the following types, classes and sizes as specified (see 6.2):

Type I - Polyester-Wool, Tropical. Army Green 344

Class 1 - General Officers
Class 2 - Officers
Class 3 - Warrant Officers
Class 4 - Enlisted Personnel

Type II - Polyester and Wool, Serge, Army Green 344

Class 1 - General Officers
Class 2 - Officers
Class 3 - Warrant Officers
Class 4 - Enlisted Personnel

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426, appearing at the end of this document or by letter.

AMSC N/A

FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Schedule of sizes

6-3/8	7	7-5/8
6-1/2	7-1/8	7-3/4
6-5/8	7-1/4	7-7/8
6-3/4	7-3/8	
6-7/8	7-1/2	

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
CCC-C-438	-	Cloth, Buckram, Woven and Nonwoven
CCC-C-461	-	Cloth, Twill, Uniform Cotton
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823	-	Cloth, Serge, Wool, Wool and Nylon, Polyester and Wool
MIL-B-1667	-	Braid, Textile, Cord Edge
MIL-S-3577	-	Sweatband, Headwear, Leather
MIL-C-10296	-	Cloth, Sateen, Cotton
MIL-C-21115	-	Cloth, Tropical: Wool, Polyester/Wool
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification For
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43675	-	Cloth, Interlining, Cotton Warp and Rayon Filling

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-43718 - Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon
MIL-C-43920 - Cloth, Interlining, Cotton or Synthetic and Nylon
MIL-C-44121 - Cloth, Twill, Polyester

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-901 - Provisions for Evaluating Quality of Cap, Garrison, Men's

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Guide samples, when furnished, are solely for the guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case the document shall govern.

3.1.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic material.

3.2.1.1 Type I. The basic material shall be a polyester-wool tropical cloth, dyed Army Green 344, conforming to type II, class 3 of MIL-C-21115.

3.2.1.2 Type II. The basic material shall be polyester and wool serge cloth, Army Green 344, conforming to type III, class 3 of MIL-C-823.

3.2.2 Lining. The lining for the caps shall be a rayon twill, dyed Army Green 45, conforming to class 1 of MIL-C-368. As an alternate, the lining material may be a polyester twill cloth, Army Green 461, conforming to MIL-C-44121.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.3 Braid, cord edge. The braid for the top edge of the curtain shall conform to one of the following classes of MIL-B-1667, as specified (see 6.2).

For General Officers	-	Class 1
For Officers	-	Class 2
For Warrant Officers	-	Class 3
For Enlisted Personnel	-	Class 4

3.2.4 Sweatband. The leather sweatband shall be not less than 7/8 inch wide, shall be dyed a brown shade, and shall conform to MIL-S-3577.

3.2.4.1 Alternate sweatband. The following are alternates to the leather sweatband. The sweatband shell fabric shall be polyester twill, black, class 2 conforming to MIL-C-43718. The sweatband interlining shall be buckram, type III, class 1 conforming to CCC-C-438. The sweatband shell fabric and interlining shall be cut on the bias and may be pre-cut and pre-folded to specified width and put on rolls. The area of joining of the pre-cut and pre-folded sweatband fabric that is placed on rolls shall be sewn diagonally with the raw edges turned to the inside. Another alternate fabric for the sweatband shall be either cotton uniform twill cloth, black, 8 ounce, conforming to type III of CCC-C-46[illegible], except the requirements for colorfastness to bleaching and light shall not apply, or sateen, cotton cloth, black, conforming to class 1 of MIL-C-10296. Sweatband fabric shall be cut on the bias and may be pre-cut and pre-folded to specified width and put on rolls. The area of joining of the pre-cut and pre-folded sweatband fabric that is placed on rolls shall be sewn diagonally with the raw edges turned to the inside.

3.2.5 Labels. Each cap shall have a combination identification-size label, conforming to type VI, class 4 of DDD-L-20. The label shall show fastness to drycleaning. The label shall contain the instruction "DRY CLEAN ONLY" in 1/8 inch maximum height lettering.

3.2.5.1 Caution instruction. Each type I and type II, classes 1, 2, and 3 caps only shall be furnished with a caution instruction sheet. The caution instruction sheet shall be printed on white bond paper and inserted within the cap (see 5.4.1). Format and contents of the caution instruction sheet shall be as follows:

CAUTION

Continually carrying the garrison cap under the web belt can cause the gold braid cord edge to RUPTURE.

3.2.6 Thread. The thread shall be cotton-covered, rayon-covered or polyester-covered polyester core, ticket number 50-2 or 3 ply and 70-2 ply conforming to MIL-T-43548.

NOTE: The thread for basting shall be bleached or unbleached basting thread, or the thread used for seaming and stitching may be used for basting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.6.1 Color. The thread shall be dyed Green E, C.A. 66034; except that where the stitching appears on the sweatband, the thread shall be a brown shade approximately matching the leather sweatband or black when fabric sweatband is used.

3.2.6.1.1 Colorfastness. The dyed thread shall show fastness to wet dry-cleaning and light, equal to or better than standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to wet-dry cleaning and light. In addition, the brown or black thread shall show "good" fastness to perspiration.

3.2.7 Side piece interlining. The material for interlining the side piece shall be either one of the following:

3.2.7.1 Cotton warp-rayon filling cloth. The material for interlining the side piece shall be cotton warp-rayon filling cloth conforming to MIL-C-43675. As an alternate, cloth, interlining, or co-polyester conforming to type II of MIL-L-43920 may be used except the requirement for dimensional stability shall not apply.

3.2.7.2 Haircloth. The material for interlining the side piece shall be cotton warp and horsehair filling interlining conforming to the following requirements when tested as specified in 4.4.1:

Weight per square yard (minimum)	-	8 ounces
Cotton warp, yarns per inch	-	55 to 65 (single or two ply yarns)
Horsehair filling, yarns per inch	-	65 to 85
Stiffness, inch-pounds (minimum)	-	Warp-0.050, filling-0.155

The cotton warp may be dyed and undyed. The filling shall be natural color horsehair. When dyed yarns are used for the warp, the dyed yarns shall show good fastness to perspiration and wet-drycleaning when tested as specified in 4.4.1.

3.2.8 Sweatband reinforcement strip. The reinforcement strip shall be a 5/8 inch wide strip of print cloth or sheeting, coated lightly on both sides with pyroxylin or vinyl.

3.3 Design. The design of caps shall be as shown on figure 1.

3.4 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. Unless otherwise specified, standard patterns provide for a seam allowance of 1/4 inch.

3.4.1 List of pattern parts. The cap parts shall be cut from the specified materials in accordance with pattern parts indicated below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Cloth, polyester-wool, tropical, Army Green 344	Side piece	2
	Curtain	1
or		
Cloth, polyester and wool, serge, Army Green 344	Side piece	2
	Curtain	1
Cloth, rayon twill, Army Green 45	Lining	2
Cloth, cotton warp-rayon filling	Interlining	2
or		
Cloth, cotton or synthetic and nylon or co-polyester	Interlining	2

3.5 Construction.

3.5.1 Stitches, seams, and stitchings. Stitches, seams, and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more methods of seams are given for the same part of the operation, any one of them may be used. Where stitch type 401 or 101 is used, the under part of the stitch shall not be visible on the finished cap. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.5.1.1 Type 301 stitching. Ends of all seams and stitchings produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch, except that ends of a continuous line of stitching shall overlap and shall not be backtacked regardless of stitch type used. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

b. Thread breaks or two or more consecutive skipped or runoff stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Types 101, 401, 304 and 500 class stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1a and 3.5.1.1.1b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.6 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is furnished, the component shall conform to that pattern.

3.7 Manufacturing operations requirements. The caps shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations or sub-operations except in the setting of the leather sweatband (see operation 10). Any additional basting or holding stitching, other than those specified, used to facilitate manufacture is permissible provided the threads are removed or do not show in the finished cap.

3.7.1 Figure. Figure 1 is furnished for information purposes only. If there are any inconsistencies between the written document and the figure, the written document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut cap parts in strict accordance with patterns furnished, which show size, shape, and notches for proper assembly of all parts. Cut the side pieces and curtain from one piece of material. All component fabric parts shall be cut on the straight in the direction of the warp as indicated by directional lines on patterns. b. Cut the interlining for the side pieces in accordance with patterns furnished so that the rayon filling or the horsehair filling is perpendicular and will run vertical to the bottom of the finished cap.						
2.	Replacement of defective components. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as specified in MIL-STD-901, are excluded and replaced with non-defective and properly matched material.						
3.	Marking. a. Mark, ticket or bundle all parts to insure a uniform shade and proper assembly throughout the cap. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-43453(CE)

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Side pieces and interlining. Finished appearance. The tops of the side pieces shall be evenly joined without seam distortion, with the outside folded edges of the side pieces finished evenly. The front and back seams shall be smoothly and evenly joined, catching the turned down top seam allowance at both corners.						
	a. (See operation 6.c for alternate). Position each side piece of basic material and side piece of interlining material with top edges even and join together along top 1/8 to 1/2 inch from edge.	101 or 301	SSa-1 SSa-1	6-8 6-8	50 50	- 50	
	b. Baste bottom edge of interlining to side piece 1/8 to 1/2 inch from bottom of interlining.	101	SSa-1	-	-	-	
5.	Make lining. Finished appearance. The lining parts shall finish smooth without twists or puckers.						
	a. Seam rayon lining pieces together along top edge, not more than 1/4 inch from edge (see operation 6.b or 6.c).	101 or 301 or 401	SSa-1 SSa-1 SSa-1	10-14 10-14 10-14	50 50 50	- 50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Assemble rayon linings and side pieces.						
	a. Position basic material side pieces face to face, position the rayon lining even with the basic material pieces, and seam top edge through rayon lining, interlining and basic material pieces (not more than 3/8 inch seam allowance). Trim points for turning.	301	LSq-2(a)	10-14	50	50	
	or						
	b. Position basic material side pieces (with interlining attached) face to face, superimpose lining pieces even with the basic material pieces, and seam top edge of all plies together with not more than 3/8 inch seam allowance.	301	LSq-2(a)	10-14	50	50	
	or						
	c. In lieu of operations 4.a, 5.a and 6.a or 6.b.						
	(1) Align top edges of the six side pieces and staple together with not less than 2 staples (one on each end) approximately 1 inch from top edge.						
	(2) Seam all plies together along top edge not more than 3/8 inch from edge.	301	LSq-2(a)	10-14	50	50	
	(3) Remove all staples without damage to material.						
	d. Turn back one ply each of basic material and interlining and raise stitch 1/16 to 1/8 inch from seam through seam allowance of all materials. The raised stitching shall be on right side of cap as worn and shall not show on the inside of the finished cap.	301	LSq-2(a)	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-43934B(CE)

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Assemble rayon linings and side pieces. (cont'd)						
	e. Fold side pieces on top seam, and seam ends of basic material side pieces and the rayon lining pieces together with a 1/4 to 5/16 inch seam. The interlining shall be caught in the stitching for a distance of 2 ± 1/2 inches from bottom edge.	301	SSa-1	10-14	50	50	
	f. Turn cap to outside, force out points and seams, and stitch bottom edges of rayon and basic material together.	101 or 301	SSa-1 SSa-1	8-12 6-8	50 50	- 50	
	g. Press side of cap smooth and flat with a utility (top and bottom) steam type buck for 5 seconds in a locked position followed by vacuum with corners and seams completely forced out.						
7.	Make curtain.						
	Finished appearance. When knife is used on overedging machine, only the raveled edge of the material shall be trimmed off. The left side of curtain shall overlap the right side at front of cap. The cord edge of the braid shall cross at front seam of cap, with the braid stitched smoothly and evenly at top edge of curtain. The stitching of the braid shall not distort the curtain.						
	a. Overedge stitch at the top edge of curtain.	500 class	EFd-1	6-8	70	70	
	b. The cord edge braid shall be placed on the edge of the curtain with the edges even and sewn with one row of stitches 1/16 inch from the cord edge. No stitches shall go through the cord edge.	301 or 401	LSq-3(a) LSq-3(a)	10-14 10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-43199C(1)

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make curtain. (cont'd)						
	c. Turn up cord edge braid and seam with two rows of 1/8 inch gage stitches through the curtain with the row of stitches nearest to the cord edge not more than 1/16 inch from the folded edge. The braid shall be caught in both rows of stitching and no stitching shall be through the cord edge.	301 or 401	LSq-3(b) LSq-3(b)	10-14 10-14	50 50	50 70	
	d. Press curtain smooth and flat with a heated pressing iron or machine before joining curtain to side pieces.						
8.	Join ends of curtain; and curtain to cap.						
	a. Lap the left end of the curtain over the outside of the right end with the bottom edges even and the front notches matching. The lap may be stitched along the bottom 1/8 to 3/16 inch from the raw edge.	301	SSa-1	8-12	50	50	
	b. Join the curtain to the bottom edge of cap with a 1/4 to 3/8 inch seam with bottom edges even.	101 or 301 or 401	LSak-2(a) LSak-2(a) LSak-2(a)	12-16 12-16 12-16	50 50 50	- 50 70	
	c. Overedge bottom of cap and curtain together.	500 class	SSa-1	6-8	70	70	
	d. Catch the side edge of the combination identification-size label in the stitching in either operation 8.b or 8.c, 1 to 2 inches to the right or left sides of the back seam, inside of cap. Position the label so that the size marking shall be visible beyond edge of sweatband in the finished cap.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Join ends of curtain; and curtain to cap. (cont'd)						
	e. The cord-edge braid shall cross at the front seam of cap (a tolerance of 1/4 inch width from alignment is allowed), with the overlapping end on the right side of cap as worn.						
	f. Turn curtain down and raise stitch bottom of cap, 1/8 to 3/16 inch from edge, through seam allowance of cap and curtain.	101 or 301 or 401	LSak-2(b) LSak-2(b) LSak-2(b)	10-14 10-14 10-14	50 50 50	- 50 50	
9.	Make sweatband.						
	a. Cut sweatband to required length.						
	b. Abut ends of sweatband and join with a row of zig-zag stitching reinforced on the underside with a strip of coated material (see 3.2.8).	304	FSe-1	8-12	50 (brown or black)	50 (brown or black)	
	or						
	c. Sweatband may be attached to curtain in continuous strips (see operation 10.a).						
	or						
	d. Alternate sweatband. Center the interlining on the inside of the sweatband shell fabric, leaving 1/4 inch of fabric on each side to be turned over the interlining. Raise stitch 1/8 to 3/16 inch from the folded edges. The finished width of the sweatband shall be 7/8 to 1-1/8 inches.	301 or 401	SSbc-1	10-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 74 WILL BE USED UNTIL EXHAUSTED.

MIL-C-44105 (

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make sweatband. (cont'd)						
	e. Cut sweatband to size. Not more than one splice, visible on the outershell of the sweatband, will be permitted.						
10.	Join sweatband to cap.						
	Finished appearance. The sweatband shall be smoothly stitched to the bottom edge of cap through seam allowance, under even tension, with the seam of the sweatband not less than 2 nor more than 3 inches to the right or left of the seam at back of cap. The sweatband shall not be exposed beyond the bottom edge of cap, and the lower edge shall be not more than 1/8 inch above the bottom edge of cap. The stitching shall not show on outside of curtain.						
	NOTE: The caps must be completely set and pressed as specified in operation 12 before sewing sweatband to cap.						
	a. Join sweatband to cap on inside through curtain seam allowance and side pieces with zig-zag stitching at bottom edge of sweatband. Turn curtain to finished postion. Needle penetration of the cap at the bottom of the sweatband shall not be more than 1/32 inch from the bottom edge of sweatband. The stitches shall not penetrate the edge of the leather.	304	Similar SSa-1	7-9	50 (brown or black)	50 (green)	
	or						
	Alternate fabric sweatband (when used).						
	The zig-zag stitching shall be no more than 1/8 inch from the bottom edge of sweatband.	304		8-12	50 black	50 black	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-43419E(CR)

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Join sweatband to cap. (cont'd)						
	The ends of sweatband shall overlap 3/4 ± 1/4 inch with the line of the sweatband stitching overlapped. Additionally, the ends of the sweatband shall not overlap at seam at back of cap.						
	b. Zig-zag stitch the overlapped end of sweatband to the underlapped portion of sweatband. The stitching shall be through the sweatband only.	304	-	7-9	50 (brown or black)	50 (brown or black)	
	or						
	Alternate fabric sweatband (when used).						
	Overlap the ends of the sweatband 1 ± 1/8 inch. Turn under the overlapped end of the sweatband 3/8 ± 1/16 inch. The overlapped end of the sweatband shall be zig-zag stitched to the underlapped portion of the sweatband. The stitching shall be through the sweatband only.	304	-	10-14	50 black	50 black	
11.	Cleaning.						
	Trim all ends of stitching and remove loose threads. Remove all spots, stains, and shade tickets.						
12.	Pressing.						
	a. Insert a side shaper between cap curtain and side piece on each side of cap and smooth curtain on shaper.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Pressing. (cont'd) b. Press smooth and flat with a heated pressing machine or heated steam iron, folding and creasing the bottom edge. c. Remove all pressing marks and gloss by using live steam.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The finished measurements shall conform to table III.

TABLE III. Finished measurements

Cap size	Head size 1/	Overall cap height at center 2/	Overall curtain height at center (excluding braid) 2/
	Inches	Inches	Inches
6-3/8	20-1/8	5-1/8	3-3/16
6-1/2	20-1/2	5-1/8	3-3/16
6-5/8	20-7/8	5-1/8	3-3/16
6-3/4	21-1/4	5-1/8	3-3/16
6-7/8	21-5/8	5-1/8	3-3/16
7	22	5-1/8	3-3/16
7-1/8	22-3/8	5-1/8	3-3/16
7-1/4	22-3/4	5-1/8	3-3/16
7-3/8	23-1/8	5-1/8	3-3/16
7-1/2	23-1/2	5-1/8	3-3/16
7-5/8	23-7/8	5-1/8	3-3/16
7-3/4	24-1/4	5-1/8	3-3/16
7-7/8	24-5/8	5-1/8	3-3/16

1/ Tolerance +1/4 inch, -1/8 inch on head size.

2/ Tolerance +1/4 inch, -1/8 inch on height.

NOTE: Size measurements will be made with gage.
Overall cap height measurement is taken at center of cap from bottom folded edge of curtain to top edge of side pieces.
Overall curtain height measurement is taken at center of cap from bottom folded edge of curtain to top edge of curtain (excluding braid).

3.9 Workmanship. The finished cap shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable point values.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.2 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.3 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.4 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1.2 and 6.2), it shall be examined for the applicable end item visual and dimensional defects in accordance with the sampling and inspection provisions of MIL-STD-901.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components listed in table IV for characteristics noted. The methods of testing specified in FED-STD-191,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

wherever applicable and as listed in table IV shall be followed. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size (lot unit)	Sample size (number of sample units)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The basis for lot size and sample units for testing shall be as follows:

Component	Lot size units	Sample unit for testing
Interlining, cotton warp, horsehair filling	Yards	1 yard full width
Print cloth or sheeting	Yards	1 yard strip

TABLE IV. Component and material tests

Component	Characteristic	Requirement paragraph	Test method
Interlining, cotton warp, horsehair filling	Weight per square yard	3.2.7.2	5041
	Yarn ply, warp	3.2.7.2	Visual 1/
	Yarns per inch	3.2.7.2	5050
	Stiffness (inch-pounds)	3.2.7.2	5202
	Colorfastness (when dyed yarn is used) to:		
	Perspiration	3.2.7.2	5680
	Wet-drycleaning	3.2.7.2	5622
Print cloth or sheeting, coated	Material identification	3.2.8	2/
	Width	3.2.8	Manual 1/

1/ One determination shall be made from each sample unit and the results reported as "pass" or "fail". All failures shall be described.

2/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the requirement stated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. For the types I and II, classes 1 and 2 caps, in-process inspection shall be performed to assure that the stitching required on the curtain in table II, operation 7.b does not go through the cord edge of the braid. After the completion of operation 7.b, 15 percent of each hours production of the curtain from each stitching machine shall be randomly selected and inspected. The finding of any stitching in the cord edge shall be cause for rejection of that hours production.

4.4.3 Point count inspection. Sampling and inspection provisions for end item visual examination, dimensional examination, and packaging examination shall be performed in accordance with MIL-STD-901.

4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packing. Each cap shall be inserted into a snug-fitting flat style clear polyethylene film bag conforming to A-A-50083.

5.1.1.2 Intermediate packing. Forty caps of one size and class only, unit packed as specified in 5.1.1.1, shall be packed alternatively (crown edge up and crown edge down) on edge in an intermediate fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of each box shall be 15 inches in length, 12-1/2 inches in width, and 5-1/2 inches in depth. Closure of boxes shall be effected with 2 inch minimum width gummed paper tape conforming to type III of PPP-T-45.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Caps shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Two hundred and forty caps of one size and class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate boxes shall be packed flat two in length, one in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 26-1/4 inches in length, 16 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with MIL-STD-901. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Two hundred and forty caps of one size and class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate boxes shall be packed flat two in length, one in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 26-1/4 inches in length, 16 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with MIL-STD-901.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with MIL-STD-901.

5.2.3 Commercial packing. Caps, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), caps, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or purchase order, interior packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. Each type I and type II, class 1, 2 and 3 cap shall be unit packed with a caution instruction sheet inserted within the polyethylene bag (see 3.2.5.1).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.

6.1 Intended use. The caps are intended for wear by male Military personnel of the Department of the Army.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type, class, and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article sample is required (see 3.1.2, 4.3, and 6.3).
e. Class of braid required (see 3.2.3).
f. Levels of preservation and packing (see 5.1 and 5.2).
g. Type and class of unit load required (see 5.2.1).
h. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
i. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Headgear

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:

Army - GL

Preparing activity:

Army - GL

(Project 8405-A080)

Review activities:

Army - MD
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

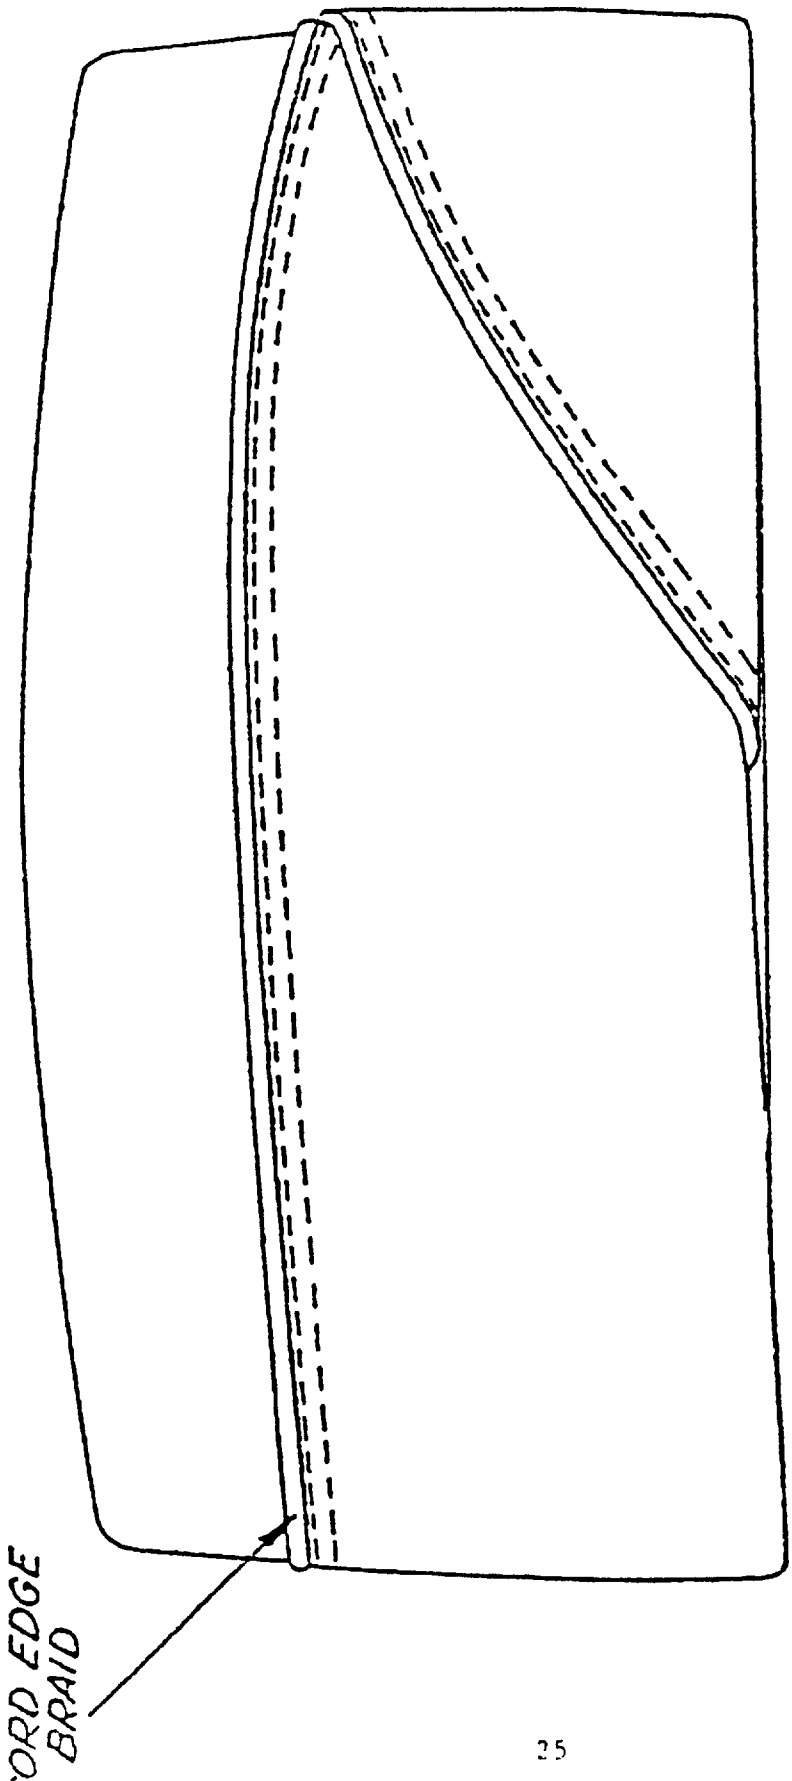


FIG. 1 CAP, GARRISON, POLYESTER/WOOL, TROPICAL, ARMY GREEN 344

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43419E(GL)	Cap, Garrison, Men's Polyester/Wool, Army Green 344

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.