MIL-C-43437

16 June 1966

MILITARY SPECIFICATION

COMMUNION SET, CHAPEL, INDIVIDUAL CUP TYPE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an individual cup type communion set for chapel use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-2200/9	-	Aluminum Alloy Bar, Rod, Shapes and Tube, Extruded, 6063
QQ-A-250/1	-	Aluminum Alloy 1100, Plate and Sheet
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Box, Fiberboard
PPP-B-676	-	Boxes, Setup
PPP-C-843	-	Cushioning Material, Cellulosic

MILITARY

MIL-P-116	-	Preservation, Methods Of
MIL-A-8625	-	Anodic Coatings, for Aluminum and Aluminum Alloy
MIL-C-43382	-	Cup, Communion, Plastic

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	-	Marking for Shipment and Storage

FSC 9925

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK LABORATORIES

14-1-93	-	Communion Set, Chapel, Individual Cup Type; Assembly Complete
14-1-94	-	Base Detail
14-1-95	-	Tray Assembly
14-1-96	-	Tray Base Assembly
14-1-97	-	Holder Details
14-1-98	-	Cover Assembly and Details
14-1-99	-	Paten

(Miniature copies of Drawings 14-1-93 through 14-1-99, identified as figures 1 thru 7 inclusively, are attached for information purposes only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF COMMERCE, NATIONAL BUREAU OF STANDARDS
Handbook H-28 - Screw-Thread Standards for Federal Services

(Application for copies of Handbook H-28 should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample communion set shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.- Materials specified shall conform to the applicable specifications and requirements specified herein. Materials not definitely specified shall be of the quality normally used for the purpose in commercial practice.

3.2.1 Aluminum.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

3.2.1.1 Sheet.- The aluminum sheet shall conform to composition 1100, temper O or H14 of QQ-A-250/1, or composition 3003, temper O of QQ-A-250/2, as specified.

3.2.1.2 Bar and rod.- The aluminum alloy bar and rod shall conform to composition 6063, temper T5 of QQ-A-200/9.

3.3 Construction.- The construction of the communion set shall conform to the requirements specified herein and as shown on the drawings listed in section 2. The communion set shall consist of the components listed in table I.

TABLE I.- Components

Nomenclature	Quantity per communion set	Reference paragraph
Base	1	3.4.1
Tray assembly	3	3.4.2
Tray	3	3.4.2.1
Cup holder	3	3.4.2.2
Cup	120	3.4.2.3
Cover	1	3.4.3
Paten	3	3.4.4

3.4 Details of components.-

3.4.1 Base.- The base shall conform to Drawing 14-1-94 and shall be constructed of composition 1100, temper O aluminum specified in 3.2.1.1.

3.4.2 Tray assembly.- The tray assembly shall conform to Drawing 14-1-95.

3.4.2.1 Tray.- The tray shall conform to Drawing 14-1-96 and shall be constructed of composition 3003, temper O aluminum specified in 3.2.1.1.

3.4.2.2 Cup holder.- The cup holder shall conform to Drawing 14-1-97 and shall be constructed of composition 1100, temper H14 aluminum specified in 3.2.1.1.

3.4.2.3 Cup.- The cup shall conform to MIL-C-43382.

3.4.3 Cover.- The cover and cross shall conform to Drawing 14-1-98. The cover shall be constructed of composition 1100, temper O aluminum specified in 3.2.1.1. The cross and cross base shall be constructed of composition 6063, temper T5 aluminum specified in 3.2.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

3.4.4 Paten.- The paten shall conform to Drawing 14-1-99 and shall be constructed of composition 3003, temper 0 aluminum specified in 3.2.1.1.

3.5 Marking.- The underside of the base of the communion set shall be permanently and legibly marked with the manufacturer's name or readily identifiable trade mark.

3.6 Threaded parts.- Threads shall conform to the requirements of Handbook H28.

3.7 Finish.- The finish on the aluminum component surfaces shall be anodized in accordance with MIL-A-8625, type II, except that the 5 percent dichromate pH 5.0-6.0 shall be omitted in the post anodic process.

3.8 Workmanship.- The metal components of the communion set shall be free from fractures, punctures, dents, creases, malformation, sharp protrusions of edges, burrs, or slivers. The threads shall not be missing, broken or stripped. Threaded components shall be drawn tight.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for defects specified in table II and dimensions specified.

4.3 Sampling for inspection.- Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 End item inspection.- A lot shall consist of all communion sets offered for inspection at one time. The sample unit shall be one completely fabricated communion set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

4.3.2.1 Quantity of components.- The quantity of components of each set shall be examined for conformance to the requirements of table I. Any nonconformance shall be cause for rejection of the set.

4.3.2.2 Visual examination.- Examination shall be made of the end item for defects listed in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 defects, expressed in terms of defects per hundred units.

TABLE II.- Visual defects

Examine	Defect
Finish	Not anodized
Construction and workmanship (applicable to all components and assemblies)	Fractures, punctures, dents, creases or malformation Any sharp protrusions, burrs or slivers
Threaded parts	Not type specified Threads broken, missing, or stripped
Marking for identification	Missing, incomplete, not legible

4.3.2.3 Dimensional examination.- Examination shall be made of the end item for compliance with dimensions specified. Any noncompliance with specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with table III. The lot shall be the number of containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery, except it need not be sealed. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units. Examination for closure and strapping shall be in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior)	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling; bulging or distortion of containers.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- The communion set shall be assembled as shown on Drawing 14-1-93. Cushioning material conforming to type II, class A of PPP-C-843 shall be placed over the patens and each tray of cups in sufficient thickness to prevent movement of the patens and cups while in transit.

5.1.1.1 Cross.- The cross shall be removed from the cover of the communion set and the washer and screw reassembled onto the cross. The cross shall be completely wrapped in cushioning material specified in 5.1.1 and the wrap secured with tape or twine. The wrapped cross shall then be secured to the underside of the cover with twine, with twine passing through the screw hole in the center of the cover (see 6.3).

5.1.2 Level C.- Communion sets shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Each communion set, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3s or V3c of PPP-B-636. Full-height folded fiberboard pads shall be provided for each corner of the container to fill the voids. Closure, waterproofing by means of tape, and reinforcing with flat steel strapping or tape banding shall be in accordance with the appendix of the container specification.

5.2.2 Level B.- Unless otherwise specified (see 5.2.2.1), each communion set, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

of PPP-B-636. Full-height folded fiberboard pads shall be provided for each corner of the container to fill the voids. Closure shall be in accordance with method II of the appendix of the container specification.

5.2.2.1 When specified (see 6.2), weather-resistant fiberboard specified in 5.2.1 shall be used for the shipping container.

5.2.3 Level C.- Communion sets, packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Additional marking.- Each wrapped cross shall be marked: "DO NOT DESTROY - CROSS".

6. NOTES

6.1 Intended use.- The communion set covered by this specification is intended for use in chapels during Protestant Communion Services.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) When preproduction sample is required (see 3.1).

(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(d) If weather-resistant fiberboard is used for level B pack (see 5.2.2.1).

6.3 Packaging.- The method of packaging referred to in 5.1.1 and 5.1.1.1 is similar to method III of MIL-P-116.

6.4 Supersession data.- The requirements for the communion set covered by this specification were formerly included in Military Standard MS16016, MS16018, MS16020, MS16021, MS16024 and MS16025.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - PE
Air Force - 28

Preparing activity:

Army - GL

Project No. 9925-0105

Review activities:

Navy - PE
Air Force - 28
Armed Forces Chaplains Board

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

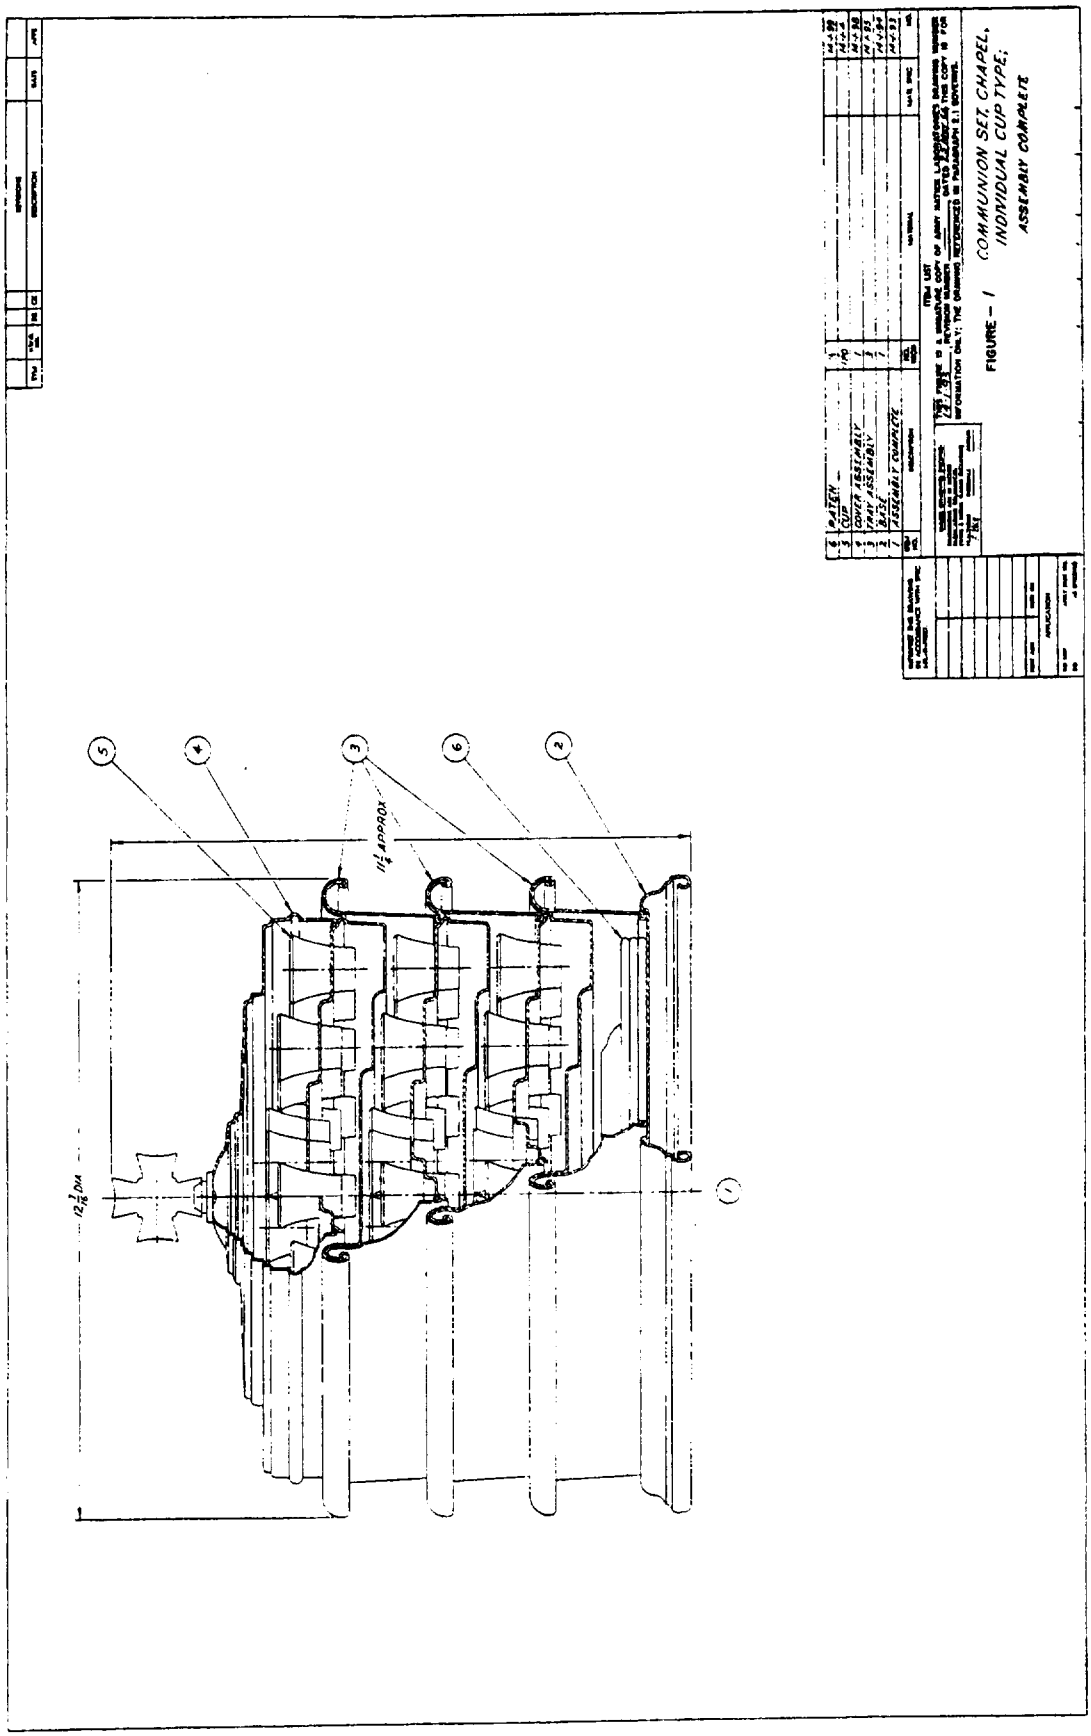


FIGURE - 1 COMMUNION SET, CHAPEL, INDIVIDUAL CUP TYPE; ASSEMBLY COMPLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.


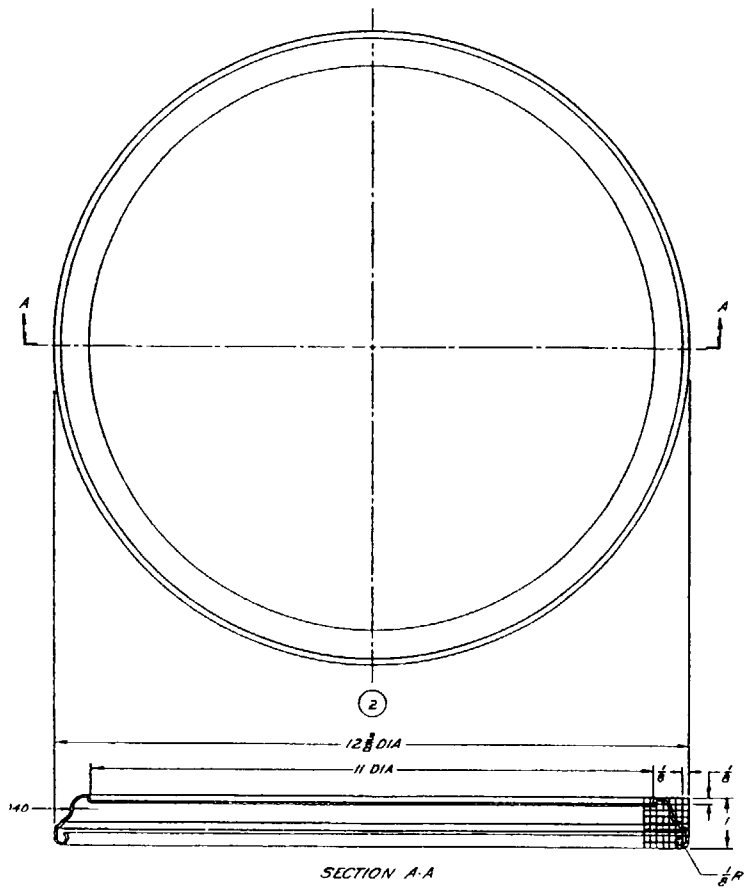


FIGURE – 2


BASE DETAIL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

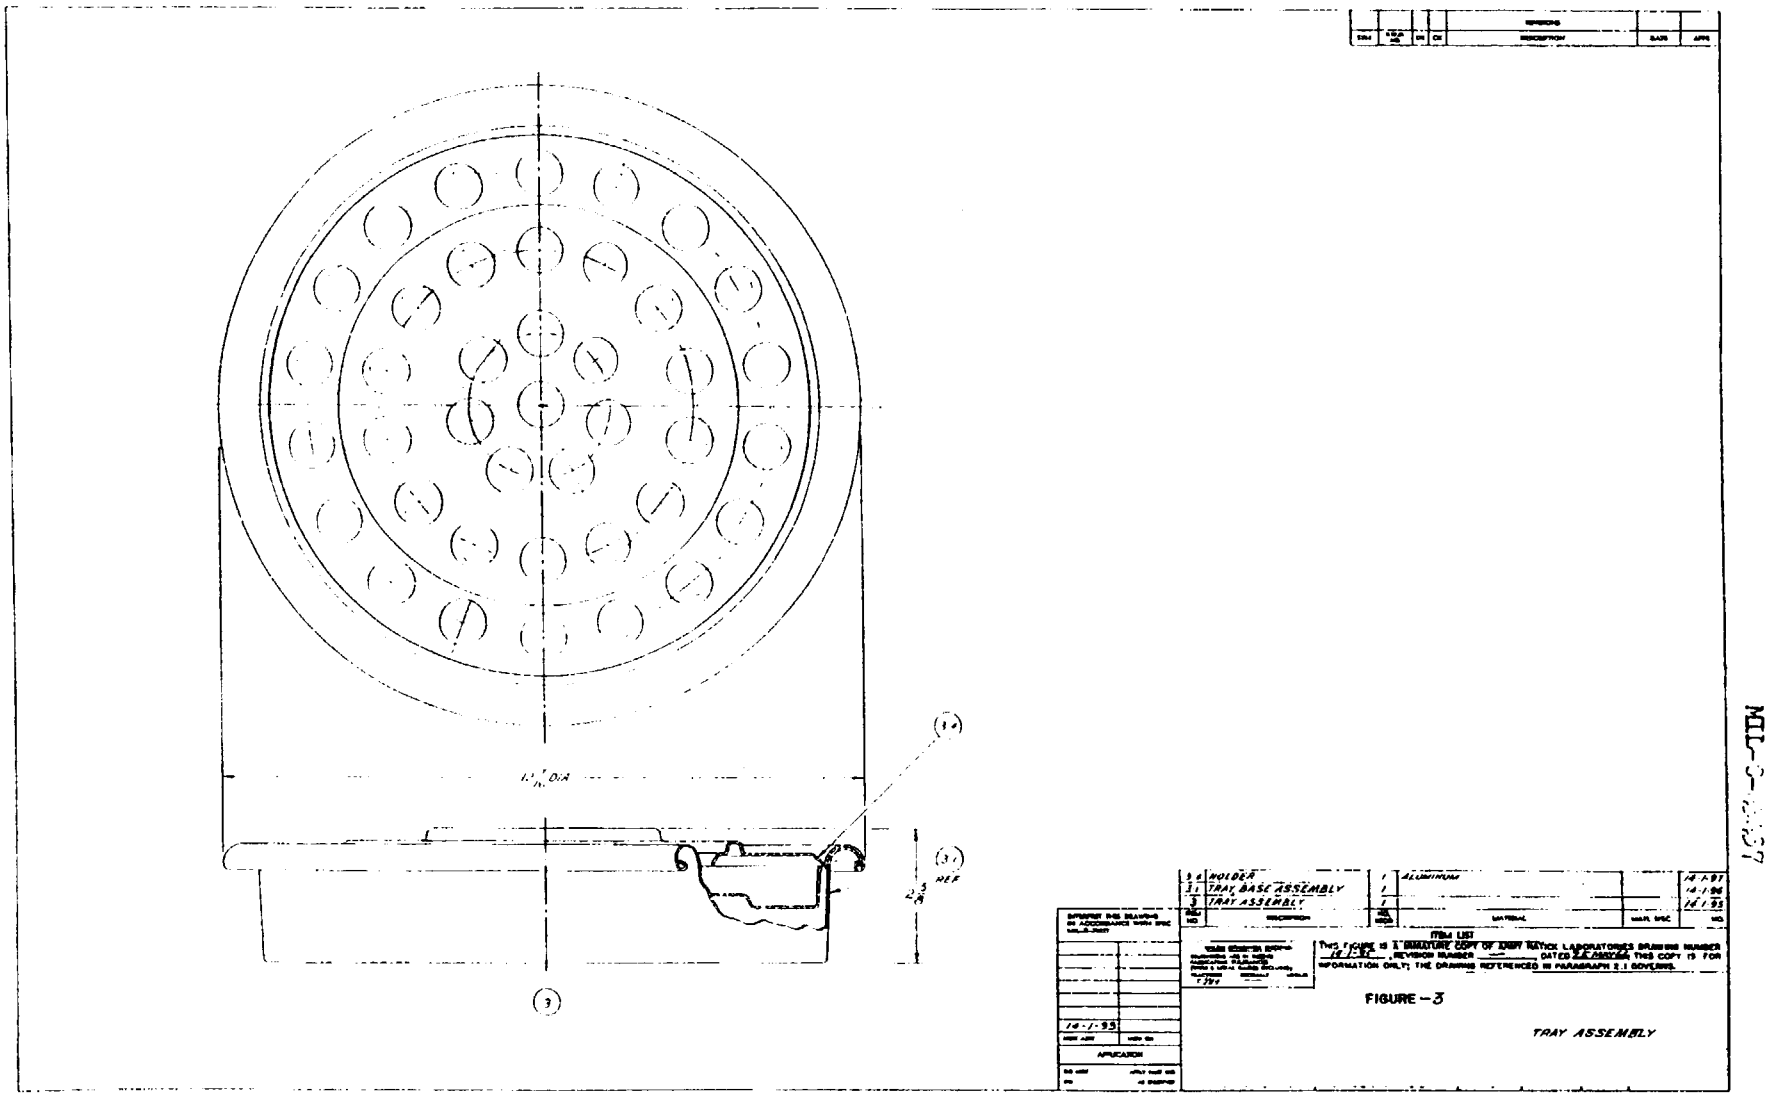

MIL-S-[illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

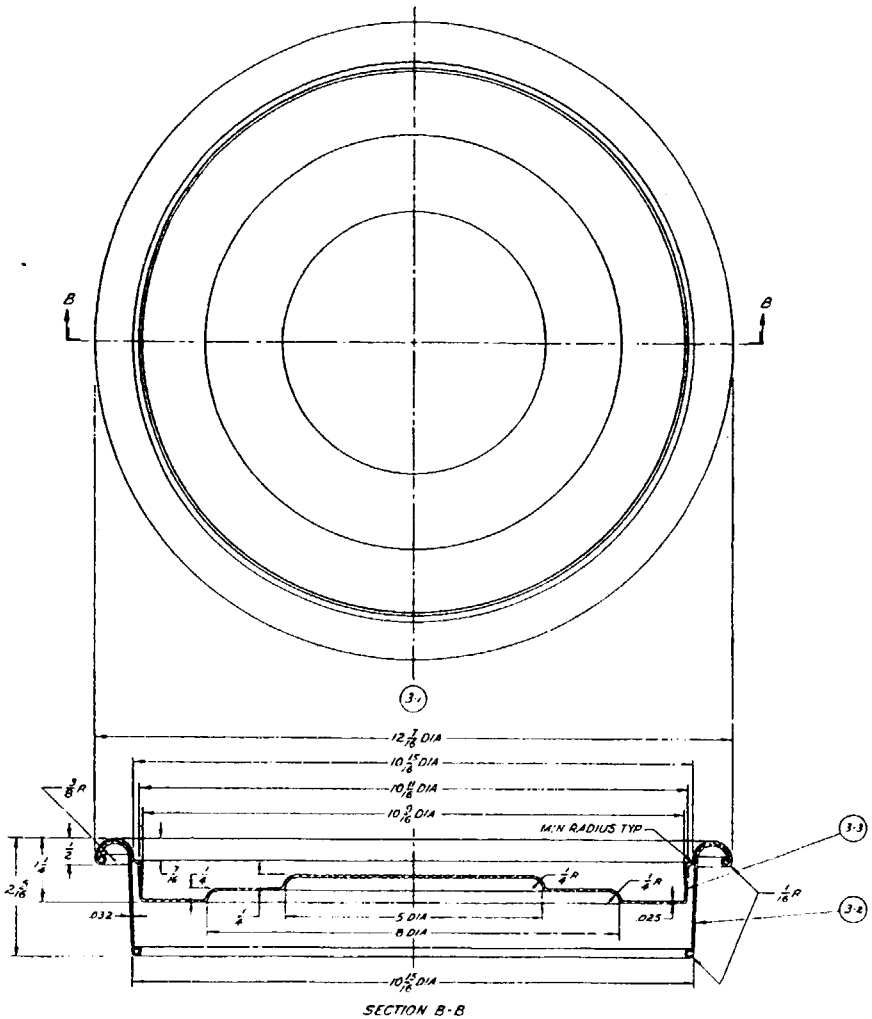

SECTION B-B

3-3	TOP	1	ALUMINUM	
3-2	BOTTOM	1	ALUMINUM	
3-1	TRAY BASE ASSEMBLY	1		M-1-84
ITEM NO.	DESCRIPTION	QUAL CODE	MATERIAL	MAIL SPEC NO.

ITEM LIST


THIS FIGURE IS A MANDATORY COPY OF ARMY MATICK LABORATORY DRAWING NUMBER 13-1-84, REVISION NUMBER —, DATED 14 JANUARY 1985. COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 3.1 GOVERNS.

14-1-85

FIGURE — 4

TRAY BASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

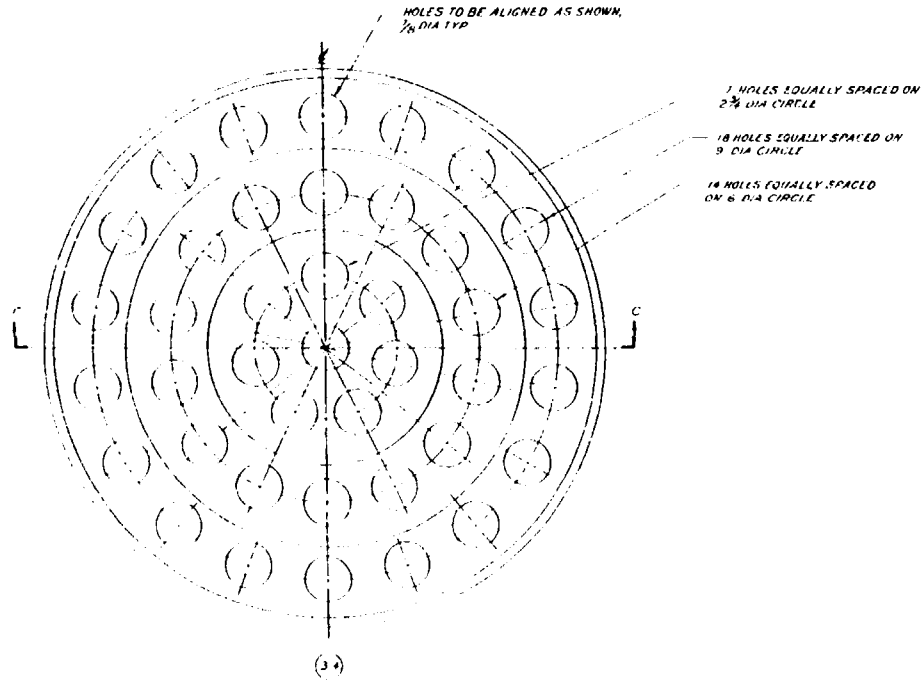


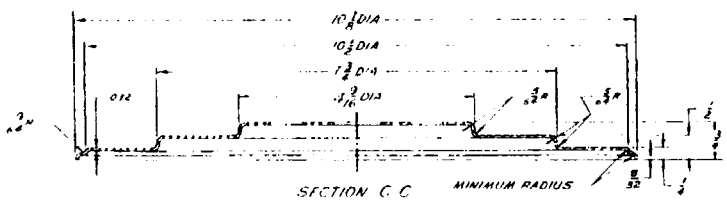


FIGURE – 5

HOLDER DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

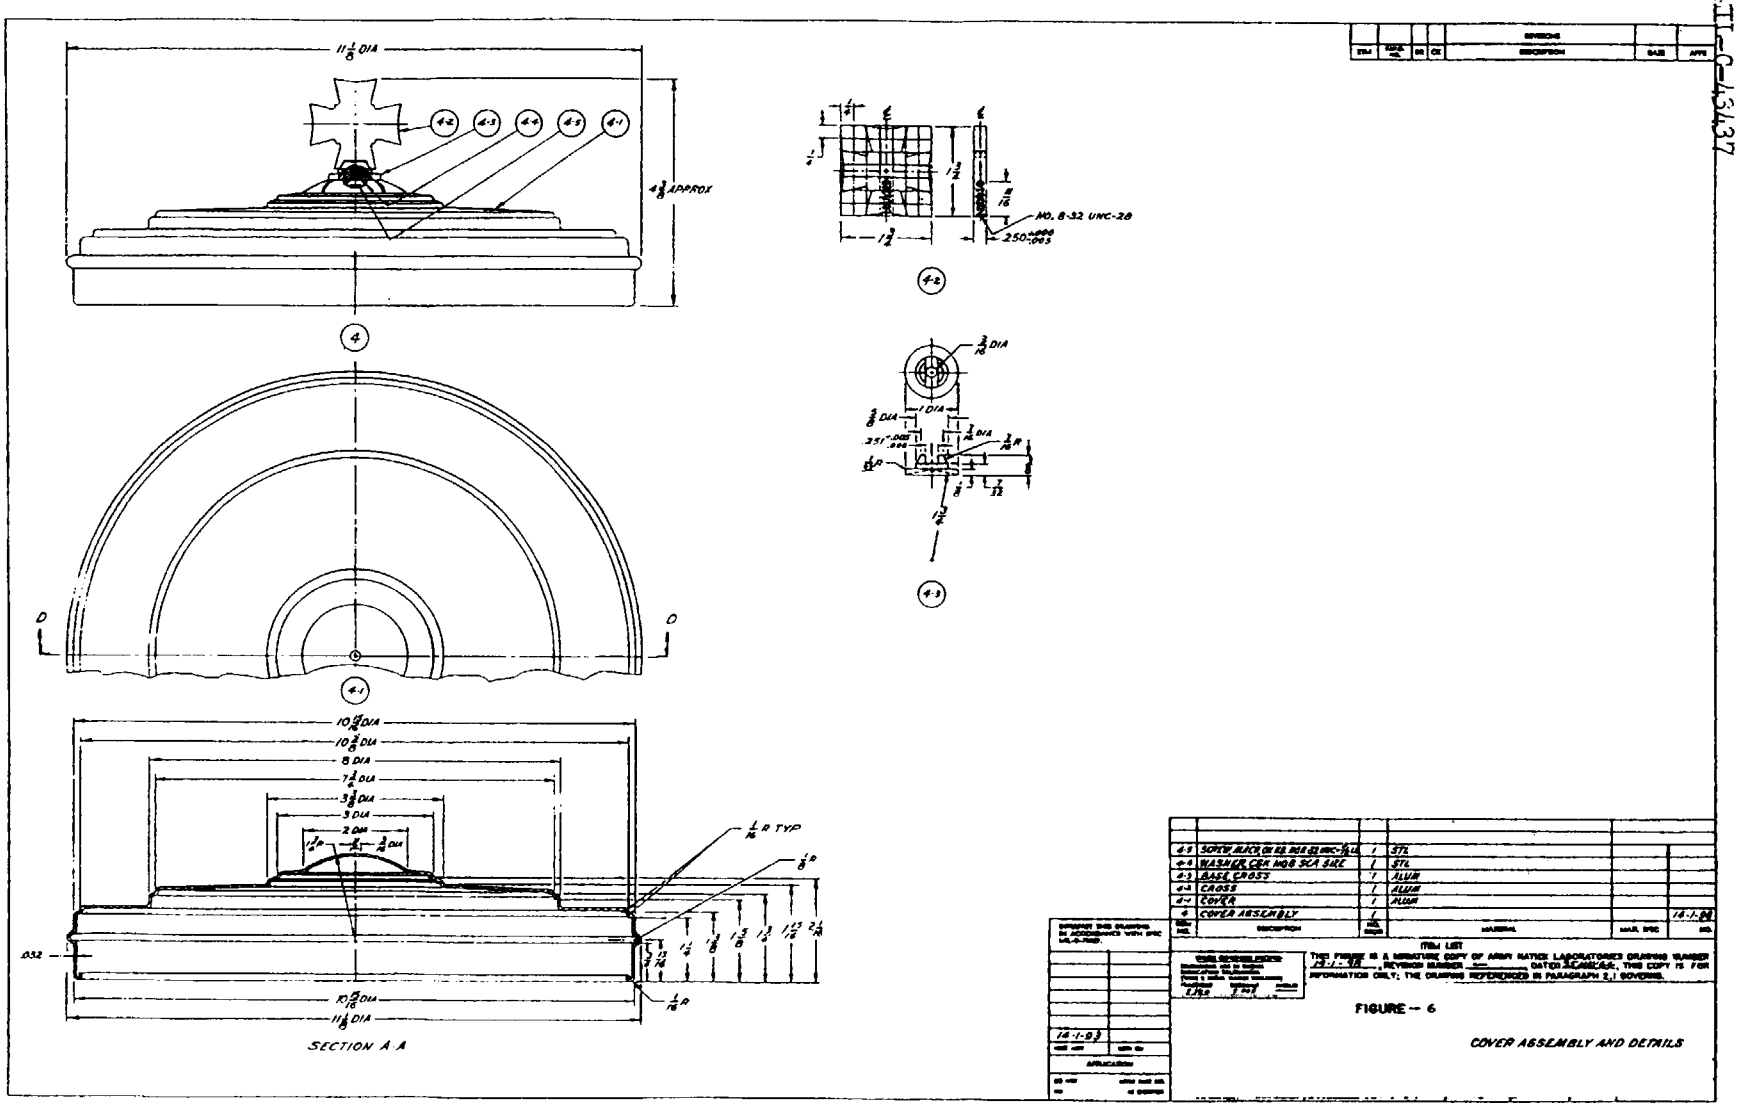


ITEM	QUAN. REQ.	SYM	DESCRIPTION	DATE	APPR
4-5	1	STL	SCREW, MACH (SEE MIL-STD-1312) NO. 8-32 UNC-2A x 1/2 LG		
4-4	1	STL	WASHER, FLAT (SEE MIL-STD-1312) NO. 8 SAE SERIES		
4-3	1	ALUM	BASE, CROSS		
4-2	1	ALUM	CROSS		
4-1	1	ALUM	COVER		
4	1		COVER ASSEMBLY		

ITEM LIST

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 14-1-95, REVISED NUMBER —, DATED 3 JUNE 64. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE — 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

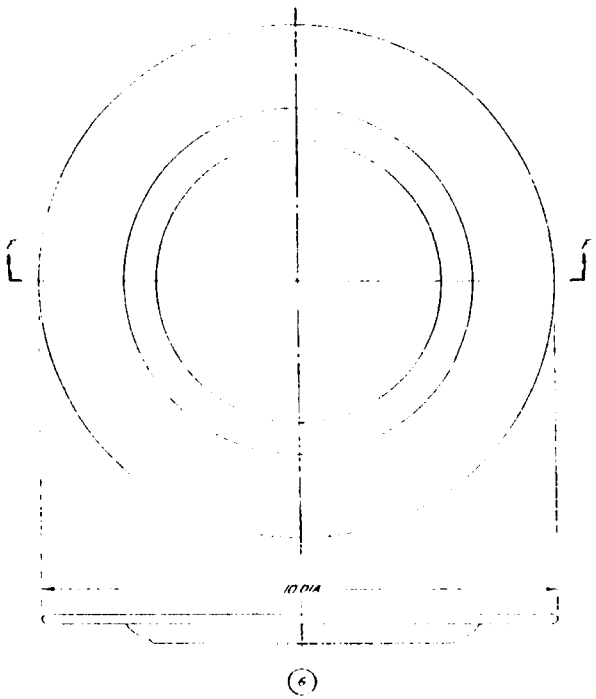




FIGURE – 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Communion Set, Chapel, Individual Cup Type MIL-C-43437

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.