MIL-C-43438D
18 December 1981
SUPERSEDING
MIL-C-43438C
11 April 1974

MILITARY SPECIFICATION

CRIMPER, BLASTING CAP, M-2, PLIER TYPE, W/FUSE CUTTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a plier type, manually operated crimping and fuse cutting tool.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATION

FEDERAL

PPP-P-40 - Packaging and Packing of Hand Tools

STANDARDS

FEDERAL

FED-STD-66 - Steel: Chemical Composition and Hardenability

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

DRAWING

US ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

12-1-162 - Crimper, Blasting Cap, M2, Plier Type, W/Fuse Cutter, Assembly and Details

(A miniature copy of Drawing No. 12-1-162 is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metalic Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.2 Material and components (see 6.5). Materials and components shall be as specified herein and on applicable drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer in his crimper, provided the complete item complies with all provisions of this specification.

3.2.1 Steel. Steel shall conform to the chemical composition of AISI 1045 of FED-STD-66.

* 3.3 Design and construction. The crimper shall be in accordance wih the design and dimensions shown on Drawing 12-1-162.

3.3.1 Fuse cutter. The jaws, operating in unison, shall be capable of cutting military blasting time fuse, M700, (commercially known as military safety fuse), and detonating cord without visible evidence of crushing or fraying of the fabric when tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

3.3.2 Crimper section. The jaws, operating in unison, shall form a crimper section. The crimper shall be capable of crimping the nonelectric military blasting cap and the nonelectric commercial No. 8 blasting cap to military blasting time fuse, M700, by indenting a groove completely around the cap. The crimped cap shall show no evidence of cracks or splits, and shall not pull loose when tested as specified in 4.5.3.

3.3 Hardness. The jaws and handles shall be hardened in accordance with the requirements of Drawing 12-1-162 when tested in accordance with 4.5.2.

3.4 Identification marking. The crimpers shall be permanently stamped with the manufacturer's identification.

3.5 Government furnished property. The following property, in the quantities required, will be furnished by the Government (see 6.4):

Item No.	Description	Identification
1	Fuse, Blasting, Time M700	NSN 1375-00-028-5246
2	Cap, Blasting, Nonelectric, M097	NSN 1375-00-783-8043

3.6 Workmanship. The crimper shall be free of chips, burrs, slivers, dirt, grease, rust areas, areas of no finish, embedded foreign matter, and sharp corners and edges except for corners and edges of the screwdriver blade and edges of the cutter and punch tip. Corners and edges of screwdriver blade and edges of cutter and punch tip shall be visually sharp. All edges of the crimper shall be smooth and free from nicks or indentations.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to precribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2.1 and 4.4.2.2 and tested as specified in 4.5.1, 4.5.2, and 4.5.3. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.4.1.1 Component testing. Prior to assembly, the crimper shall be tested in accordance with 4.5.2 to determine compliance with 3.3.3. The sample unit shall be one jaw and handle (punch end) and one jaw and handle (screwdriver end). The lot shall be all of the jaw and handle sections offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units.

* 4.4.2 End item inspection. The end item shall be examined in accordance with 4.4.2.1, 4.4.2.2 and 4.4.2.3. The lot size shall be expressed in units of one crimper. The sample unit shall be one complete crimper.

* 4.4.2.1 Visual examination. The end item shall be examined for the defects listed in table I. The inspection level shall be II and the AQL shall be 2.5 major and 6.5 total (major and minor combined) defects per hundred units.

TABLE I. Visual defects

Examine	Defect	Classification Major	Minor
Finish	Not specified finish	X	
	Area of no finish (except where staked or peened)		X
	Any rust or imbedded foreign matter		X
	Not free of burrs, slivers, chips, grease, or dirt		X
Construction	Crimper not smooth		X
	Part missing	X	
Marking	Missing, illegible, or incorrect		X
Workmanship	Corners and edges of screwdriver blade, edges of cutter, and punch tip not sharp	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

TABLE I. Visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship (cont'd)	Nicks or indentations on edge of crimper	X	
	Face of detent tapered	X	
	Machine screw not staked or peened for a minimum of one thread	X	
	Handle rides over the detent	X	

4.4.2.2 Dimensional examination. Examination shall be made of the crimpers for compliance with the dimensional requirements specified, including the crimp opening in the closed position. Any dimension not meeting the specified requirements shall be classified as a defect. The inspection level shall be S-3 and the AQL shall be 1.5 defects per hundred units.

4.4.2.3 End item testing. The end item shall be tested as specified in 4.5.1 and 4.5.3 for conformance to the requirements in 3.3.1 and 3.3.2. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

4.4.3 Packaging inspection. Examination of packaging requirements shall be in accordance with PPP-P-40.

4.5 Methods of inspection.

4.5.1 Fuse cutter sharpness. The fuse cutter shall be used to cut ten, 6-inch pieces of military blasting time fuse, M700. Failure of one or more cuts to comply with 3.3.1 shall be classified as a defect.

4.5.2 Hardness. Hardness tests to determine compliance with 3.3.3 shall be in accordance with ASTM E 18. Four readings shall be made; one each on the cutter and crimper areas and punch and screwdriver ends. Any reading not within specified requirements shall constitute a defect.

4.5.3 Crimper test. Ten 6-inch long pieces of military blasting time fuse, M700 and ten unarmed (empty) military nonelectric blasting caps or unarmed (empty) nonelectric commercial No. 8 blasting caps shall be used to determine compliance with 3.3.2 as follows:

(a) Ten 6-inch long fuses, cut in accordance with 4.5.1, shall be inserted into ten unarmed (empty) caps in the normal manner and crimped with the crimper. The crimp shall be examined for compliance with the crimping requirements of 3.3.2. Any nonconformance shall constitute a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

(b) The assembled fuse and cap of (a) above shall then be pull tested using an 18-pound load to determine movement of fuse in the crimped cap for compliance with the pull requirement of 3.3.2. Any nonconformance shall constitute a defect.

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for level A, B, or C shall be in accordance with PPP-P-40 (see 6.2).

6. NOTES

6.1 Intended use. The crimper is intended for use in manually cutting safety fuse and for crimping blasting caps to the fuse.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When first article is required (see 3.1).
(c) Selection of applicable levels of preservation, packaging and packing (see 5.1).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 Government furnished property. The contracting officer should arrange to furnish the property specified in 3.5. He should cite the contract number, quantities required, the shipping address and the ultimate destination of the property. He should specify that inert caps and fuses should be shipped. The items are stocked at US Army Armament Materiel Readiness Command, DRSAR, DSDAG, Rock Island, IL 61299.

* 6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirments of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Air Force - 99

Review activity:

Army - AR

User activity:

Navy - MC


Preparing activity:

Army - GL

Project No. 5120-0990

☆U.S. GOVERNMENT PRINTING OFFICE: 1982—505-022/452

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

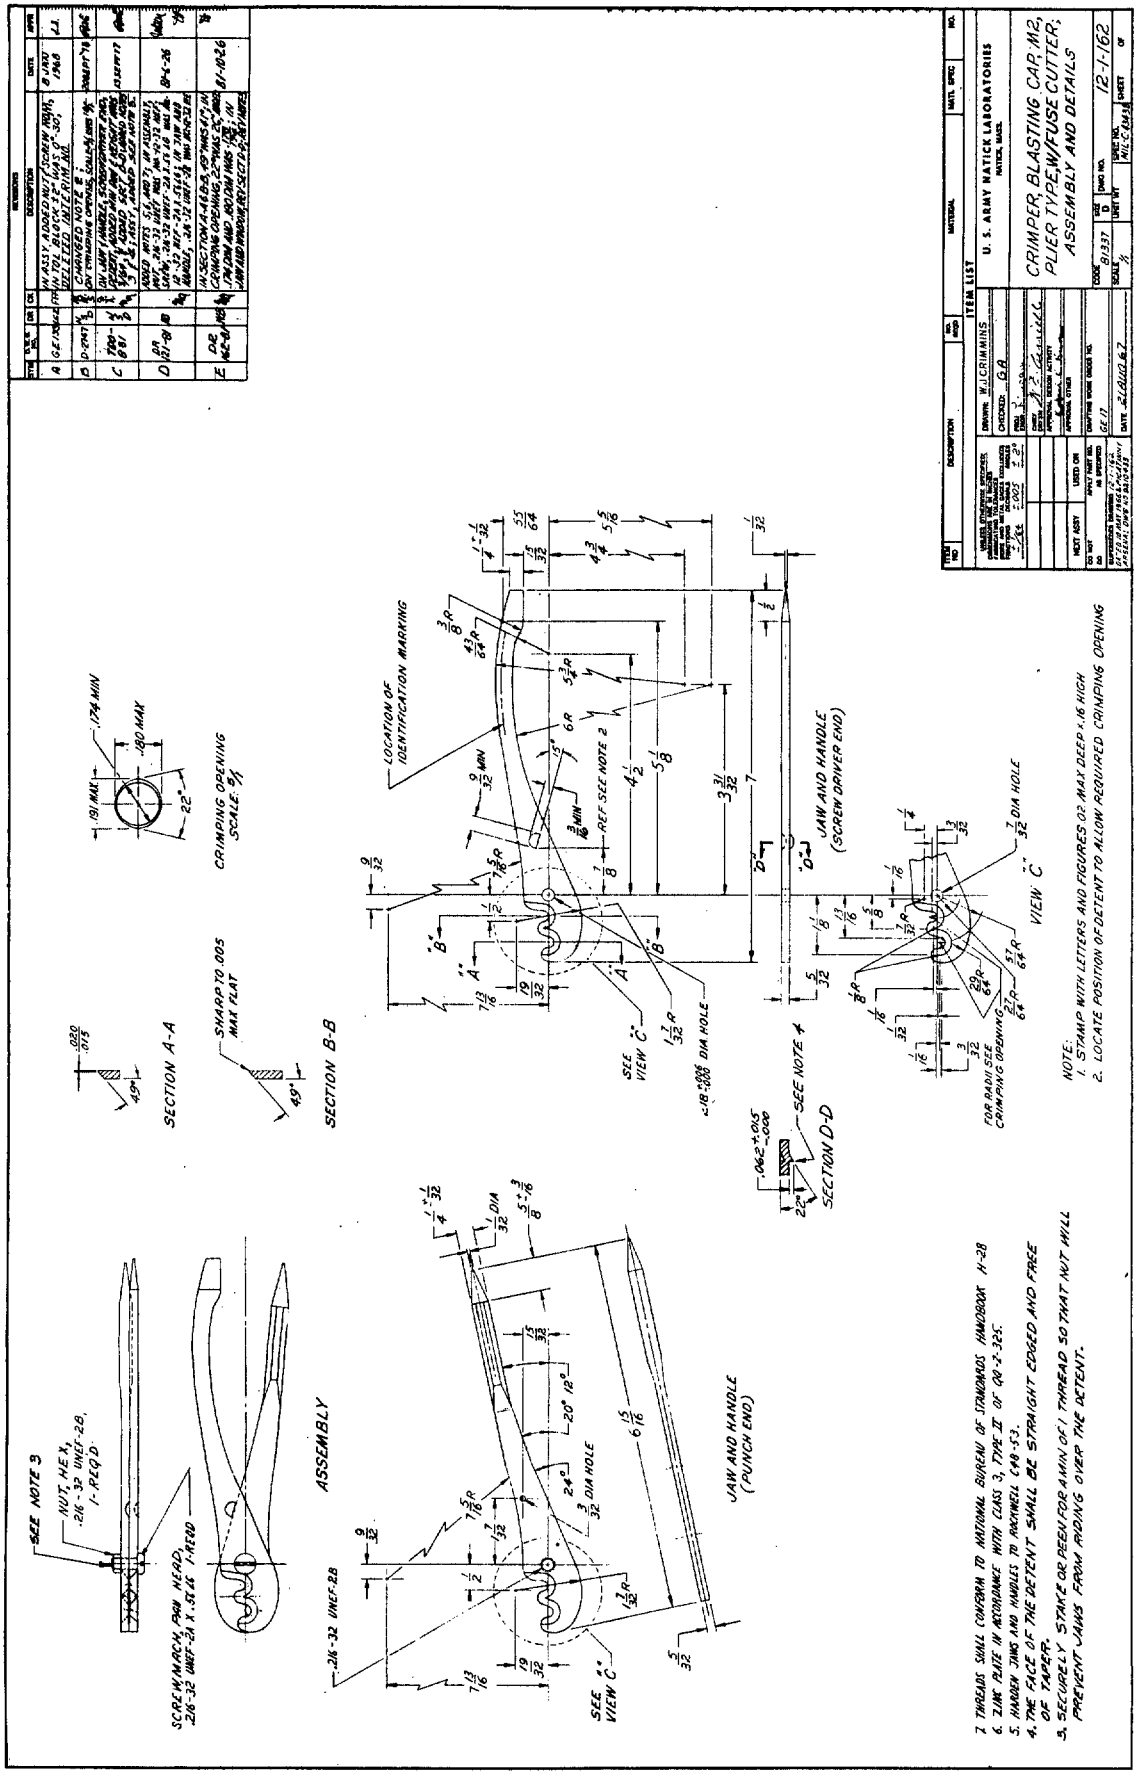

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-43438D - Crimper, Blasting Cap, M-2, Plier Type, W/Fuse Cutter

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:26Z
Check the source to verify that this is the current version before use.