MIL-C-43413C
3 October 1980
SUPERSEDING
MIL-C-43415B
13 September 1973

MILITARY SPECIFICATION

CAP, SERVICE, MILITARY POLICE, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a service cap made of a coated knitted material.

1.2 Classification. The cap shall be of one type in the following classes and sizes (see 6.2).

Class 1 - Army
Class 2 - Air Force

Schedule of sizes

6-3/8	7-1/4
6-1/2	7-3/8
6-5/8	7-1/2
6-3/4	7-5/8
6-7/8	7-3/4
7	7-7/8
7-1/8	

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MIL-C-434.

SPE(

FI

or Brushes; General Specification

e, Vinyl Chloride.
Extrusion Material, Polyethylene
Medium, and High Density).

.cations and Methods of Testing.
te.
ng (Unbleached, Bleached and

Coated (Artificial Leather).
Equipage and Tentage

board.
einforced and Plain, For

MI

al, Uniform and Cap.
ather.
Eyelet Washers, Metallic,
For.
Artificial Leather.

SPEC

MI

lled Flange Type; and

STAND

FED

F
F
Fpling and Testing.
Festing.
Fsting.
Fitchings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-657 - Provisions for Evaluating Quality of Service Caps.
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for the guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample in which case the specification shall govern.

* 3.1.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.2 Material (see 6.5).

3.2.1 Basic material. The basic material shall be vinyl coated cloth (artificial leather) conforming to class 7, untreated, white, of CCC-C-700, with the following exceptions:

(a) The widths of the base and coated cloths are not required.
(b) The commercial designation of the base cloth shall be 3.70 ounces per square yard.
(c) The weight of the coated cloth shall be 15.0 ounces per square yard (minimum).
(d) The coating weight shall be 12.0 ounces per square yard (minimum).

3.2.1.1 The grain shall be a simulated twill weave embossing.

3.2.2 Front piece supporter. The material for supporting the front piece shall be a nylon mesh type, white, knitted on a single needle bar Raschel provided with ground and inlay guide bars. The mesh cloth shall be single face with a knitted chain effect on the back and shall contain laid-in threads every other course. The pattern (design) shall be as shown in the standard sample. The finished cloth shall meet the following physical requirements when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Weight, oz/sq yd. (min)	7.0
Wales per inch (min)	12.0
Courses per inch (min)	25.0

Stiffness (load pounds):

Parallel to wales	0.120 to 0.160
Parallel to courses	0.200 to 0.240

* 3.2.3 Crown protector. The material for the crown protector, personal label pocket and binding shall be 0.0040 ± 0.0004 inch thick flexible film conforming to type II, class 1 of L-P-375. The personal label pocket shall be heat or electronically sealed to the crown protector; the strength of the seal shall meet the bondability requirement of L-P-375.

3.2.4 Inner body band. The material for the inner body band shall be of high density (linear) polyethylene plastic meeting the requirements of type I, class H, grades 1 through 5, white, of L-P-390, except that the thermal stress cracking resistance, the low-temperature brittleness, dielectric constant and dissipation factor shall not apply. The bands shall be extruded or stripped, slit or cut, 2 ± 1/16 inches wide and 0.030 ± 0.002 inch thick and have a stiffness (scale reading) between 15 and 31 inclusive. Testing shall be as specified in 4.4.1.

* 3.2.5 Sweatband. The leather for sweatband shall be 1-1/4 ± 1/8 inches wide, dyed a brown shade, conforming to MIL-S-3577 or as an alternate, artificial leather material conforming to MIL-S-43993 may be used.

3.2.6 Front stay. The front stay shall be made of the following components and shall meet all the requirements when tested as specified in 4.4.1.

3.2.6.1 Twin wire tape. The twin wire tape shall be a commercial type, measuring 1 ± 1/8 inches wide. The steel wire shall be hard rolled, cold finished carbon steel, galvanized, flat wire and shall be 0.016 ± 0.001 inch thick by 0.90 ± 0.004 inch wide.

3.2.6.2 Plastic. The plastic reinforcement shall be 0.020 ± 0.002 inch thick, natural color, linear polyethylene or polypropylene.

3.2.6.3 Stay cover and sweatband. The material for the stay cover and sweatband reinforcement piece shall be a 5-harness warp sateen cloth, natural or bleached, weighing 7.4 ± 0.8 ounces per square yard. The reinforcement piece may be print or sheeting cloth.

3.2.7 Visor. The visor material shall be made of four layers; top ply, plumper paper, inner core and bottom ply, laminated together with a suitable adhesive. The polished side of the top ply shall be towards the top of the visor; the coated side of the bottom ply shall be towards the bottom of the visor and plumper paper shall be positioned between the top ply and the inner core. Testing shall be as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.7.1 Top ply. The top ply shall be a vinyl film conforming to type I, class 2, 0.020 inch thick of L-P-375. The film shall be black and one side shall be press polished to produce a smooth shiny pattern leather surface.

3.2.7.2 Plumper paper. The plumper paper shall be a high alpha cellulose wood pulp paper which has been wet-web saturated with 10 to 15 percent by weight chloroprene latex. The saturated paper shall have a bone dry weight of 0.62 ± 0.062 pounds per square yard and a thickness of 0.022 ± 0.003 inch. Testing shall be as specified in 4.4.1.

3.2.7.3 Inner core. The inner core shall be made of fiberboard and shall be free of surface lumps, indentations, ripples, ridges, and cracks and shall conform to the following physical requirements when tested as specified in 4.4.1.

Basic weight, lbs/1000 sq. ft. (minimum)	350.0
Thickness, inches	0.070 to 0.080
Bursting strength, points (minimum)	560.0

* 3.2.7.4 Bottom ply. The bottom ply shall be a pyroxylin coated cloth.

* 3.2.7.4.1 Base cloth. The base cloth shall be cloth, cotton, sheeting conforming to type VII, class 1 of CCC-C-432, except that the cloth shall be desized and scoured and shall contain not more than 5.0 percent starch and protein materia excluding chloroform-soluble and water-soluble material and the requirements for breaking strength, seam efficiency and shrinkage shall not apply.

* 3.2.7.4.2 Coating compound. The coating compound shall be 100 percent virgin cellulose nitrate that has been pigmented and plasticized to meet the requirements specified herein.

* 3.2.7.4.3 Coated cloth. The coating shall be applied on the face side of the base cloth only, and there shall be no striking through of the coating to the back of the cloth, The coated cloth shall meet the requirements specified in table I, when tested as specified in 4.4.1.

TABLE I. Physical properties of coated cloth

Characteristic	Requirement (min)
Weight, oz./sq. yd.	6.3
Breaking strength, lbs.	
Warp	50
Filling	40
Hydrostatic resistance	No leakage
Colorfastness to crocking	"Good"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 3.2.7.4.3.1 Color. The color shall be Hatter's green and shall match the standard sample (see 6.3).

* 3.2.7.4.3.2 Matching. The color and shade shall match the standard sample under artificial daylight having a color temperature of 7500 K and shall be a good approximation to the standard sample under incandescent lamplight at 2800 K.

* 3.2.7.4.3.3 Grain. The grain shall be kid and shall match the approved grain standard sample (see 6.3).

3.2.7.5 Fabrication. The visor shall be cut in strict accordance with pattern furnished. The outside edge of visor shall be bound with the plastic film specified in 3.2.8, stitched 1/32 + 1/32 - 0 inch from folded edge of binding on top of visor with ticket No. 16, 4 ply cotton thread as specified in 3.2.16 with 6 to 8 stitches per inch, using stitch type 301, seam type BSb-1, of FED-STD-751. The binding shall finish 3/16 to 1/4 inch in width on top and bottom of visor with the polished side showing. The visor shall be molded into a curved shape as shown by standard sample.

3.2.8 Plastic film. The plastic film for the band, visor binding, band binding and the sweatband welt shall conform to type I, class 2, 0.010 inch thick of L-P-375. The band and visor and band binding shall be black and the sweatband welt shall be brown.

3.2.9 Chin strap. The chin strap material shall be made of two layers (see 4.4.1); top ply and bottom ply of the following materials, laminated together with a suitable adhesive.

3.2.9.1 Top ply. The top ply shall be a vinyl film conforming to the requirements of 3.2.7.1.

3.2.9.2 Bottom ply. The bottom ply shall be a plumper paper conforming to the requirements of 3.2.7.2. In addition, the plumper paper shall be colored black with a colorfast dye and shall not bleed or transfer (see 4.4.1).

3.2.9.3 Rivet, split. The rivet for attaching one of the loops to the strap shall be a split rivet, approximately 3/16-inch long legs and 1/8 to 3/16-inch diameter, black enameled head (see 4.4.1).

3.2.9.4 Construction. The chin strap shall conform to the design and dimensions as shown on figure 3. The polished side of the vinyl film shall be towards the top of the chin strap. The top strap shall be riveted to the top of loop and the button strap shall be stapled to bottom fold of loop when joining ends of loop (see 4.4.1).

3.2.10 Elastic ornamental braid (class 1 only). The braid shall be a two-color, rayon-elastic, reversible braid conforming to the following requirements when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement
Lines	6
No. of carriers	24
Ends per carrier	2
Warp (30-gage rubber)	10
Picks per inch (relaxed) (minimum)	68
Pounds per gross yard (minimum)	2.5
Overall width (inches)	15/32 ± 1/32

One-half of the braid shall be Green, Cable No. 65007 and the other half Yellow, Cable No. 65002. The finished braid shall show "good" fastness to light and laundering.

* 3.2.11 Buttons. The buttons for affixing the chin strap shall be metal, cap, screw-back, 25-line, conforming to type II of MIL-B-3461. The buttons for class 1 cap shall conform to style 2, class A and the buttons for class 2 cap shall conform to style 1.

3.2.12 Eyelets. The eyelets and washers shall be brass, conforming to MIL-E-20652. The side eyelets shall conform to Dash No. BBE 110, the front eyelet to Dash No. BBE 118. The washer for the front eyelet shall conform to BBW 101 of MIL-E-20652/1. The four side eyelets may be backed with washers.

3.2.13 Sweatband reinforcement strip. The reinforcement piece shall be a strip of cotton print cloth or cotton sheeting cloth.

3.2.14 Staples. The staples shall be stamped from wire, 0.025 ± 0.0005 inch thick. The wire shall be steel, Monel metal, brass or stainless steel. If ordinary carbon steel is used, it shall have a non-corrosive finish capable of withstanding not less than 25 hours of the salt spray test, when tested as specified in 4.4.1.

3.2.14.1 Staples for inner body band, front stay and chin strap. The staples shall measure 1/4 ± 1/16 inch wide and have divergent prongs 1/4 ± 1/16 inch long

3.2.14.2 Staples for button post. The staples shall be heavy duty flat, standard clinch 0.005 inch wide, 1/4 ± 1/64 inch long legs, 1/2 inch wide crown.

3.2.15 Crown support. The crown support shall consist of a steel wire inclosed in a nylon grommet conforming to the following requirements:

3.2.15.1 Steel wire. The steel wire shall be spring steel 5/16 ± 1/16 inch wide and 0.020 ± 0.005 inch thick, cut to required size. The wire shall be completely covered with white pyroxylin coating. The coupling shall be 1 ± 1/8 inches long and zinc or cadmium coated to withstand 25 hours of the salt spray test, when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.15.2 Nylon grommet. The grommet shall be composed of nylon filling yarns and cotton warp yarns braided to form a grommet, approximately 3/4 inch in diameter. The filling yarns shall be of clear nylon monofilament, 0.012 + 0.0005-inch diameter conforming to class N, type II of H-S-951, except the cut length designation shall not apply. The warp yarns shall be 12 ± 1/2 count singles carded cotton. The grommet shall be made on a 48-carrier braider or 44 carrier braider, with carriers braiding in pairs with a 1/1 weave with one 0.012-inch diameter nylon monofilament end per carrier; or 24-carrier braider with carriers braiding in pairs on a 1/1 weave with two 0.012 inch diameter nylon monofilament ends per carrier. Eight warps or nine warps when a 44-carrier braider is used, of 2 ends of cotton yarns shall be evenly spaced around the circumference interlacings. There shall be not less than 8 picks per inch in the relaxed state. The ends of the grommet shall be joined by the use of wood or cork plugs, laminated paper rings, or other suitable material to insure proper closure of the grommet. Testing shall be as specified in 4.4.1.

3.2.16 Thread. The cotton thread for seaming and stitching the caps shall conform to V-T-276 as indicated below and the thread for zigzag stitching the sweatband and sweatband welt shall be nylon thread, dyed Brown, shade AO, C.A. 66056 conforming to type I or II, class 1; or type III, size E of T-T-295.

Use	Color	Type	Ticket No.	Ply
Seaming and stitching	White	ICI	A	3
Stitching of binding to cap and outer band	Black, Shade AA C.A. 66043	IC2	A	3
Stitching of visor and sweatband welt to cap	Black, Shade AA C.A. 66043	IC2	16	4
Elastic braid stitching (class 1 only)	Goldenlite, Shade AJ, C.A. 66051	IC2	A	3

3.2.16.1 Colorfastness. The dyed threads shall show fastness to light and laundering equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to light and laundering.

3.2.17 Labels. Each cap shall have a combination identification-size label and a cardboard instruction folder.

3.2.17.1 Identification-size label. The combination identification-size label shall conform to type I, class 4 of DDD-L-20. The label shall show fastness to laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.17.2 Cardboard instruction label. The printed cardboard instruction label of commercial type shall be attached by a string not less than 12 inches in length, looped through a hole 1/4 inch in diameter and shall be attached to one of the chin strap buttons. The label shall measure 4 by 3 inches. The text of the label shall be as shown on figure 4, printed on one side only in letters not less than 1/8 inch in height.

3.3 Designs. The cap consists of three side pieces and a top crown piece with plastic crown protector. The cap has a removable grommet, a plastic visor, an adjustable chin strap, and a permanently attached front stay. The center front of cap shall be in vertical alignment.

3.4 Figures. Figures are furnished for information purposes only. If there are any inconsistencies between the written specification and the figures, the written specification shall control.

3.4.1 Patterns. Standard patterns, which provide an allowance of 1/4 inch for all seams will be furnished by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractors working patterns. The working patterns shall be identical to the standard patterns

3.4.2 List of pattern parts. The cap shall be cut from the specified materials in accordance with the pattern parts indicated in table II.

TABLE II. List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
Cloth coated, artificial leather	Crown*	1
	Front	1
	Side (quarters)	2
Vinyl plastic film (0.0040 inch thick)	Crown protector*	1
Nylon knitted cloth (Raschel)	Front support	1
Laminated visor material	Visor (to show size and shape)	1
	Front stay	
Cotton sateen cloth	Cover	1
Polyethylene or polypropylene (0.020 inch thick)	Reinforcement	1

* Same pattern part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.5 Construction.

3.5.1 Stitches, seams, and stitching. Stitch, seam, and stitching types as specified in table III shall conform to FED-STD-751. Whenever two or more methods of seam and or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 101 or 401 is used, the chain or underside of the stitch shall be on the inside of the cap.

3.5.1.1 Seam type. Seam types shall be as specified in table III, with seam allowances maintained and seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result.

3.5.1.2 Thread breaks and ends of seams. Ends of all seams and stitchings, produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch, except that ends of a continuous line of stitching shall overlap and shall not be backtacked, regardless of stitch type used. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 or 101 stitch type) may be repaired using 301 stitch type.

3.5.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

* 3.6 Manufacturing operation requirements. The cap shall be manufactured in accordance with operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations shown.

3.6.1 Marking. The components of the cap shall be marked to insure a uniform shade and size. Any method of marking may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on type tickets.
(3) Adhesive type tickets which leave an impression or traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut all parts in accordance with pattern parts furnished which show directional lines, size, and notches for proper assembly. Cut crown piece, frontpiece, sides (quarters) and outer band from one piece of material. b. Cut outer band, with the length of the band in the direction of the wales, 2 ± 1/16 inches wide. c. Cut plastic film for band binding 1 to 1-1/4 inches wide. The cut binding may be placed on rolls. d. Cut elastic braid to finish snugly around outside of outer band (see operation 17). e. Cut plastic for sweatband welt, 3/4 ± 1/16 inch wide.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-657 and 4.4.2 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III, MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Shade and size marking.						
	Mark, ticket or bundle all component parts made of the basic material to insure a uniform shade and proper assembly throughout the cap.						
4.	Make inner body band.						
	a. Cut inner body band to proper length.						
	b. Overlap ends of band 3/4 to 1-1/4 inches and secure with two staples through the overlap portion.						
5.	Join crown protector to crown.						
	Finished appearance. The crown protector shall not be exposed on the outside of the finished cap. The crown protector shall not be twisted in the stitching.						
	Superimpose crown protector on crown and stitch protector to crown, 1/16 to 3/32 inch from edge.	301 or 101	SSa-1	6-8	A A	A	
6.	Join sides and front of cap.						
	Finished appearance. The sides (quarters) and front of cap shall be joined without twisting or puckering. The seams shall be pressed open.						
	Join sides and join front to sides.	301	SSa-1	8-10	A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Attach front support to front.						
	Finished appearance. The front support shall lie flat and smooth without puckers or twists.						
	Superimpose front support on front as indicated by notches on pattern and stitch support to front, 1/16 to 1/8 inch from edge, along top edge and along bottom edge from each side seam to cut out portion of front support. Stitching shall not continue along cut out portion of front support.	301 or 101	SSa-1	6-8	A A	A	
8.	Make front stay.						
	a. Position the reinforcement on the cotton cover as indicated by notches on pattern.						
	b. Fold sides of cotton cover over reinforcement toward center and stitch through all plies with two rows of vertical stitching 1-1/4 to 1-5/16-inches gage, and centered on stay.	301		8-10	A	A	
	c. Stitch across top of stay 5/8 to 3/4 inch from top edge of stay, catching edge of plastic reinforcement in the stitching.	301		8-10	A	A	
	d. Insert the twin wire tape, cut 3-3/8 to 3-1/2 inches long, between rows of stitching, positioned between plastic and cover.						
9.	Make band.						
	Join back seam of band and press seam open.	301	SSa-1	8-10	A	A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Join band to sides and sides to crown.						
	a. Position band on sides with back seams aligned and stitch band to sides.	101 or 301	SSa-1	8-10	A A	A	
	b. Position crown to sides as indicated by marks on pattern and stitch crown to sides catching the top of front stay in the stitching at center front of cap. Place a second row of stitching, centered between the first row of stitching and the raw edge.	301	SSa-2	8-10	A	A	
	c. Turn crown seam and side seam allowances towards crown and raise stitch crown, 1/16 to 3/32 inch from turned edge.	301	LSq-2(b)	8-10	A	A	
11.	Set eyelets.						
	a. Position one eyelet in center of frontpiece (± 1/8 inch off center tolerance) and 1 + 1/8 - 0 inches above top edge of band, measured to center of eyelet. The eyelet shall be inserted through the front and front stay and shall be backed with a washer.						
	b. Insert two eyelets in each side of cap, through front and support and through side quarters, positioned 1 + 1/8 - 0 inches from top edge of band and 1 ± 1/8 inches from each side of the front and side joining seams. Measurements shall be to center of eyelets. The eyelets may be backed with a washer.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Set inner body band.						
	Finished appearance. The inner body band and the binding shall be so attached in the cap that there shall be no twisting, puckering or distorting of the outer band. The front stay shall be between the inner body band and the binding on the finished cap. The overlapped ends of the inner body band shall be in the back portion of the cap not closer than 1/2 inch of center back seam.						
	a. Reverse inner body band and outside band and position inner body band to outer band with edges even.						
	b. Stitch bands together through seam allowance of outer band and side, with stitching 1/8 to 3/16 inch from edge.	301	SSa-1	8-10	A	A	
	c. Turn cap, position bottom edge of front stay even with bottom edge of inner body band on inside of cap and staple front stay to inner body band with staple 1/2 to 5/8 inch from bottom edge and centered (± 1/8 inch) on front stay. Pull down outer band snugly around inner band. The prongs of the staple shall be clinched on the inside of the cap and shall be through the twin wire tape. Staple specified in 3.2.14.1 shall be used.						
	d. Superimpose ends of plastic binding and join ends of binding, 1/8 to 1/4 inch from raw ends. Press seam open.	301 or 101	SSa-1	8-10	A black A black	A black	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Set inner body band. (cont'd)						
	e. Position raw edge of plastic binding to outside bottom edge of outer band and stitch binding to outer band 3/16 to 1/4 inch from bottom edge of band.	301	SSa-1	6-8	A black	A black	
	f. Turn binding to inside of cap and stitch through all plies 1/16 to 3/32 inch from top turned edge of binding, with bottom edge of front stay caught in the binding and side edge of label caught in the stitching 1 ± 1/2 inches to the right or left of center back seam. The binding shall finish 1/4 to 5/16 inch wide on outside of band. The joining seam of the binding ends shall be in line with back seam of band. The polished side of the binding shall be showing.	301	EFb-1	6-8	A black	A black	
13.	Set visor.						
	Finished appearance. The visor shall be uniformly set and the band shall not be distorted or twisted in the setting.						
	Position visor to inside of inner body band with visor notch centered with front of cap and stitch visor to cap.	301	LSa-1	6-8	16-4	16-4	
14.	Make and attach sweatband.						
	Finished appearance. The abutted edges of sweatband and sweatband welt shall be centered (1/4 inch tolerance) with the center back seam of cap. The sweatband shall finish smooth and flat without distortion to provide a comfortable fit.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make and attach sweatband. (cont'd)						
	Neither the edge of the welt nor the edge of the sweatband shall be exposed beyond the lower edge of cap.						
	a. Fold welt in half lengthwise. Position edge of sweatband 1/16 to 3/32 inch from turned edge of welt and join with a row of zigzag stitching.	304		12-14	E	E	
	b. Butt ends of sweatband and welt and join with a row of zigzag stitching, reinforced on the underside with a 5/8 ± 1/16 inch strip of cotton fabric.						
	c. Position finished sweatband to cap and stitch to cap with stitching through welt and adjacent to edge of leather sweatband.	301		6-8	16-4	16-4	
15.	Block caps.						
	Finished appearance. The caps shall be uniformly blocked and shall not be distorted in the blocking.						
16.	Position socket holes and attach buttons and chin straps.						
	Finished appearance. The chin strap shall fit smooth and snug to band of cap without twists or distortion.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Position socket holes and attach buttons and chin straps. (cont'd) a. Position socket holes on the band so that the center of each socket is 5-5/8 ± 1/16 inches each side of center front of cap and 7/16 + 1/16, - 0 inch from bottom edge of band. b. Neatly punch the button socket holes through band, inner body band. c. Insert button socket posts and stitch through inner body band. The socket post shall be positioned so that the eagles on the buttons will be in an upright position when buttons are secured. - or - The button socket posts shall be inserted and a securing staple clinched tightly over the center of the screw tube flange on the inside of the band. d. Attach chinstrap to post and attach buttons into the posts with the eagle in an upright position. The outer band shall not show between binding and chinstrap.	Hand		4-6	A		
17.	Make elastic braid band (class 1 only). Finished appearance. The elastic band shall finish snugly and flat around outside of band without slipping and falling out of position.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

NO	TABLE III MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make elastic braid band (class 1 only). (cont'd)						
	a. Double lap ends of braid and join with a box stitch, or box tack with stitching 1/16 to 3/32 inch from edges. Overlap shall measure not less than 3/8 inch.	301	LSc-Box	8-10	A Gold	A Gold	
	b. Place elastic band around outside of cap band positioned with top edge of braid adjacent to sides of cap with lapped seam of braid even with back seam of cap. The green portion of the braid shall be towards top of cap.						
*18.	Clean caps, insert grommet and attach instruction label.						
	a. Trim all thread ends, remove loose threads, spots, stains, and shade tickets without injuring the material.						
*	b. Insert grommet into the crown. The grommet shall be centered on crown seam, evenly distributed and fit snugly in the cap. Plug shall be at center back.						
*	c. Attach cardboard instruction label string to one of the chin strap buttons.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 75 WILL BE USED UNTIL EXHAUSTED

CCI-C-43415C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.7 Measurement of cap. The finished measurements of the caps shall be as specified in IV.

TABLE IV. Measurement of caps (in inches)

Height of cap at front (measured at the point where band joins the visor to center of crown seam).	4-1/2 ± 1/16
Width of quarters at side seams (measured from band joining seam to crown joining seam).	2-1/8 + 1/8 - 1/16
Width of frontpiece at center front (measured from band joining seam to crown joining seam).	2-3/4 ± 1/8
Width of sides at backseam (measured from band joining seam to crown joining seam).	1-7/8 ± 1/8
Width of visor (measured on upper side at center front).	2 ± 1/16
Width of finished band (measured from side seam to bottom edge of band).	1-3/4 ± 1/8

Head measurement 1/	Size of cap	Crown Length of crown 2/ (from seam to seam)	Width of crown 2/ (from seam to seam)
Inches		Inches	Inches
20-1/8	6-3/8	10-3/8	10
20-1/2	6-1/2	10-1/2	10-1/8
20-7/8	6-5/8	10-5/8	10-1/4
21-1/4	6-3/4	10-3/4	10-3/8
21-5/8	6-7/8	10-7/8	10-1/2
22	7	11	10-5/8
22-3/8	7-1/8	11-1/8	10-3/4
22-3/4	7-1/4	11-1/4	10-7/8
23-1/8	7-3/8	11-3/8	11
23-1/2	7-1/2	11-1/2	11-1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Measurement of caps (in inches) (cont'd)

Head measurement 1/	Size of cap	Crown Length of crown 2/ (from seam to seam)	Crown Width of crown 2/ (from seam to seam)
Inches		Inches	Inches
23-7/8	7-5/8	11-5/8	11-1/4
24-1/4	7-3/4	11-3/4	11-3/8
24-5/8	7-7/8	11-7/8	11-1/2

1/ All head measurements + 1/8 - 1/4 inch.

2/ All crown measurements ± 3/16 inch.

3.8 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in MIL-STD-657 and 4.4.2. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 4.4.1 Component and material testing. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in referenced documents, components shall be tested for the characteristics specified in table V. Testing conditions defined in FED-STD-601 shall be acceptable except in a case of dispute, tests shall be conducted with both the specimen and test apparatus under standard conditions as defined in FED-STD-191. All requirements are applicable to the sample unit. All test reports shall contain the individual values utilized in expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. Unless otherwise specified in subsidiary specifications, sampling shall be as follows:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Component	Lot size expressed as	Sample unit for testing
Nylon knitted cloth	Yards	1 yard, full width
Polyethylene, high density	Yards	1 yard
Twin wire tape	Yards	2 feet
Linear polyethylene or polypropylene	Yards	1 yard, full width
Cotton sateen cloth	Yards	1/2 yard, full width
Visor	Each	3 complete
Visor bottom ply	Yards	1-1/2, full width
Chinstrap	Each	3 complete
Elastic ornamental braid (class 1 only)	Yards	1 yard
Staples (each size)	Gross	15 each
Crown support	Each	1 each
Nylon grommet	Each	1 each

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Component tests

Component	Characteristic	Requirement paragraph	Test method
Nylon knitted cloth (for front piece supporter)	Material identification	3.2.2	1530 (FED-STD-191) 1/
	Type of knit	3.2.2	Visual 3/
	Weight	3.2.2	5041 (FED-STD-191)
	Construction:	3.2.2	
	- Wales per inch		5070 (FED-STD-191)
	- Courses per inch		5070 (FED-STD-191)
	Stiffness:	3.2.2	
	- Parallel to wales		5202 (FED-STD-191)
	- Parallel to courses		5202 (FED-STD-191)
Polyethylene, high density (for inner body band)	Width	3.2.4	2121 (FED-STD-601)
	Thickness	3.2.4	2011 (FED-STD-601)
	Stiffness	3.2.4	4.5.1
Twin wire tape	Width	3.2.6.1	Measurement 3/
	Material identification	3.2.6.1	1/
	Thickness	3.2.6.1	Measurement 3/
	Width	3.2.6.1	Measurement 3/
Linear poly-ethylene or polypropylene	Material identification	3.2.6.2	1/
	Color	3.2.6.2	Visual 3/
	Thickness	3.2.6.2	2011 (FED-STD-601)
Cotton sateen cloth	Weight	3.2.6.3	5041 (FED-STD-191)
	Color	3.2.6.3	Visual 3/
Visor	No. of layers	3.2.7	Count 3/
	Construction	3.2.7	Visual 3/
	Plumper paper:	3.2.7.2	
	- Material identification		1/
	- Weight		4.5.2
	- Thickness		173 (UU-P-31)
	Inner core:	3.2.7.3	
	- Material identification		1/
	- Weight		110 (UU-P-31)
	- Thickness		173 (UU-P-31)
	- Bursting strength		112 (UU-P-31) 2/
	Bottom ply:	3.2.7.4	
	- Base cloth		1/
	- Weight		5041 (FED-STD-191)
	- Breaking strength		51000 (FED-STD-191)
	- Hydrostatic resistance		5516 4/ (FED-STD-191)
	- Colorfastness to crocking		5651 (FED-STD-191)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method
Chin strap	No. of layers	3.2.9	Count 3/
	Bottom ply:	3.2.9.2	
	- Color		Visual 3/
	- Color bleeding		4.5.3
	- Color transfer		4.5.4
	Rivet, split:	3.2.9.3	
	- Length		Micrometer 3/
	- Diameter		Micrometer 3/
	- Color		Visual 3/
	Construction	3.2.9.4	Visual 3/
Elastic ornamental braid (class 1 only)	Material identification	3.2.10	1/
	Color	3.2.10	Visual 3/
	Construction:	3.2.10	
	- Lines		Count 3/
	- No. of carriers		Count 3/
	- Ends/carrier		Count 3/
	- Warp		Count 3/
	- Picks per inch		Count 3/
	- Gage of rubber		1/
	Weight	3.2.10	4.5.5
	Width	3.2.10	Measurement 3/
	Colorfastness:	3.2.10	
	- Light		5660 (FED-STD-191)
	- Laundering		5614 (FED-STD-191)
Staples	Material identification	3.2.14	1/
	- Wire thickness	3.2.14	Micrometer 3/
	- Corrosion resistance (ordinary carbon steel)	3.2.14	811 (FED-STD-151)
	Dimensions:		
	- Inner body band, front stay and chin strap	3.2.14.1	Measurement 3/
	- Button post	3.2.14.2	Measurement 3/
Crown support	Steel wire	3.2.15.1	
	Material identification	3.2.15.1	1/
	Dimensions	3.2.15.1	Measurement 3/
	Coating identification	3.2.15.1	1/
	Coating color	3.2.15.1	Visual 3/
	Coupling size	3.2.15.1	Measurement 3/
	Coupling coating	3.2.15.1	1/
	Corrosion resistance	3.2.15.1	811 (FED-STD-151)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method
Nylon grommet	Material identification:	3.2.15.2	
	- Warp		1200 (FED-STD-191)
	- Filling		1530 (FED-STD-191)
	Diameter	3.2.15.2	Measurement 3/
	Warp yarn size	3.2.15.2	1/
	Construction	3.2.15.2	Count 3/
	Type of closure	3.2.15.2	Visual 3/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ The thickness and pressure limitations of the test method shall be deleted and an instrument of proper capacity used.

3/ One determination shall be made on each sample unit and the results shall be reported as "pass" or "fail".

4/ The coated surface shall be exposed to the water for a period of 60 minutes and the hydrostatic head shall be 20 inches. Any penetration of water will be considered a test failure.

* 4.4.2 End item examination. Sampling and examination of the end item shall be in accordance with MIL-STD-657 except that the following defects shall be added to the material defects listed therein:

Defect	Point value
Pyroxylin coated cloth (underside of visor):	
1. Non-uniform or thin coating, uncoated area, or separation of coating from base cloth.	3
2. Tacky, brittle, cracked or checked coating.	3
3. Blister, lump, wrinkle or crease.	3
4. Cut, hole, tear, scratch or abrasion.	3
5. Spot, stain or streak.	2
6. Color not as specified.	2

4.5 Methods of inspection.

4.5.1 Stiffness. The band shall be tested for stiffness at room temperature according to Method 4211 of FED-STD-311, using a span length of 1.0 inch, a moment weight of 1.0 inch-pound and measuring the load at 20° on the angular deflection scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

4.5.2 Weight. The specimens of plumper paper for test shall consist, whenever possible, of not less than five sheets each at least 1 square foot in area. The area of the specimen shall be determined to the nearest 0.25 percent of its total area, which requires a precision of 0.1 percent in measuring dimensions. The specimens shall then be dried and weighed as specified in Method 240 of UU-P-31. Calculate and report the weight per square yard to the nearest 0.001 pound.

4.5.3 Color bleeding. A specimen of plumper paper not less than 3 square inches in area shall be submerged in approximately 200 mL of boiling distilled water for not less than 30 minutes. After the submersion period, the specimen shall be removed and the water shall be examined for any evidence of color change. Any change in color of the water shall be considered as evidence of color bleeding of the paper and shall be considered a test failure.

4.5.4 Color transfer. Place a specimen of plumper paper on a sheet of white writing paper. Place a weight on the specimen to provide a pressure of 1 pound per square inch. Draw the weighted specimen over the writing paper for a distance of 6 inches. Repeat the drawing procedure four additional times over the same path. Any evidence of color transfer from the plumper paper onto the writing paper shall be considered a test failure.

4.5.5 Weight. One yard of braid shall be weighed under standard atmospheric conditions to the nearest 0.001 pound from each sample unit. The sum of the values determined for each sample unit shall be multiplied by 144, divided by the number of sample units, and reported to the nearest 0.1 pound.

* 5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Label A.

* 5.1.1.1 Unit packing. Each cap shall be inserted in a clear polyethylene film bag of 0.00125-inch thickness (± 25% tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. The bag shall measure 19 by 14-1/2 inches with the opening on the 14-1/2 inch dimension. A mechanical tie (paper or plastic covered steel wire, aluminum band, etc.) shall be applied to close the bag opening.

* 5.1.1.2 Intermediate packing. Two caps of one class and size only, unit packed as specified in 5.1.1.1, shall be placed in a fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 125 of PPP-B-636. The inside dimensions of each fiberboard box shall be 11-3/4 inches in length, 11-3/4 inches in width, and 8-1/2 inches in depth. Each box shall be provided with a one-piece die-cut corrugated fiberboard bridge with the shape, dimensions, and material requirements as shown on figure 5. The first cap shall be placed crown up in the box with the visor in a corner. Two sheets of tissue wrapping paper 30 inches in length by 20 inches in width conforming to type I, class 1 of UU-P-553 shall be loosely rolled together along the 30-inch dimension. The rolls of tissue wrapping

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

paper shall be used to fill the void behind the cap and shall halfway circumvent the cap band so as to fit between the bridge uprights and the cap. The setup fiberboard bridge shall then be positioned in the box at right angles to the cap with the bridge platform incline parallel to the slope of the cap crown. The second cap shall be placed crown down in the box with the visor in the opposite corner from the visor of the first cap. A two-sheet roll of tissue wrapping paper as specified for the first cap shall be applied to the second cap in the same manner as required for the first cap. Each box shall be sealed with gummed paper tape having a minimum width of two inches conforming to type III, grade A of PPP-T-45.

* 5.1.2 Commercial. Caps shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Twenty-four caps, of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24-3/4 inches in length, 24-3/4 inches in width, and 27-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-129. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes of the same class may be packed within the same container.

5.2.2 Level B packing. Twenty-four caps, of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Level A intermediate packs shall be packed flat two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24-3/4 inches in length, 24-3/4 inches in width, and 27-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with MIL-STD-129. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes of the same class may be packed within the same container.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification, except that the inspection shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 5.2.3 Commercial packing. Caps preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

* 5.3 Marking. In addition to any special marking required by the contract, intermediate packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes, of the same class, shall have securely attached to the end and size, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

5.3.2 Handling marking. The legend 'THIS SIDE UP" in letters not less than 1-1/2 inches in height shall be stenciled or printed on the top panel of each shipping container. In addition, the front panel of each shipping container shall be plainly marked in 1-1/2-inch letters the word 'UP" with arrow marks as follows:



6. NOTES

6.1 Intended use. The caps are intended for wear by male military personnel of the Department of Defense.

* 6.2 Ordering data. Procurement document should specify the following:

(a) Title, number and date of this specification.
(b) When a first article sample is required (see 3.1.2, 4.3 and 6.4).
(c) Class and size required (see 1.2).
(d) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

* 6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Defense Acquisition Regulation. The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the DAR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

* 6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 11

Review activities:


Army - MD
Air Force - 45, 99

Preparing activity:

Army - GL

Project No. 8405-0655

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

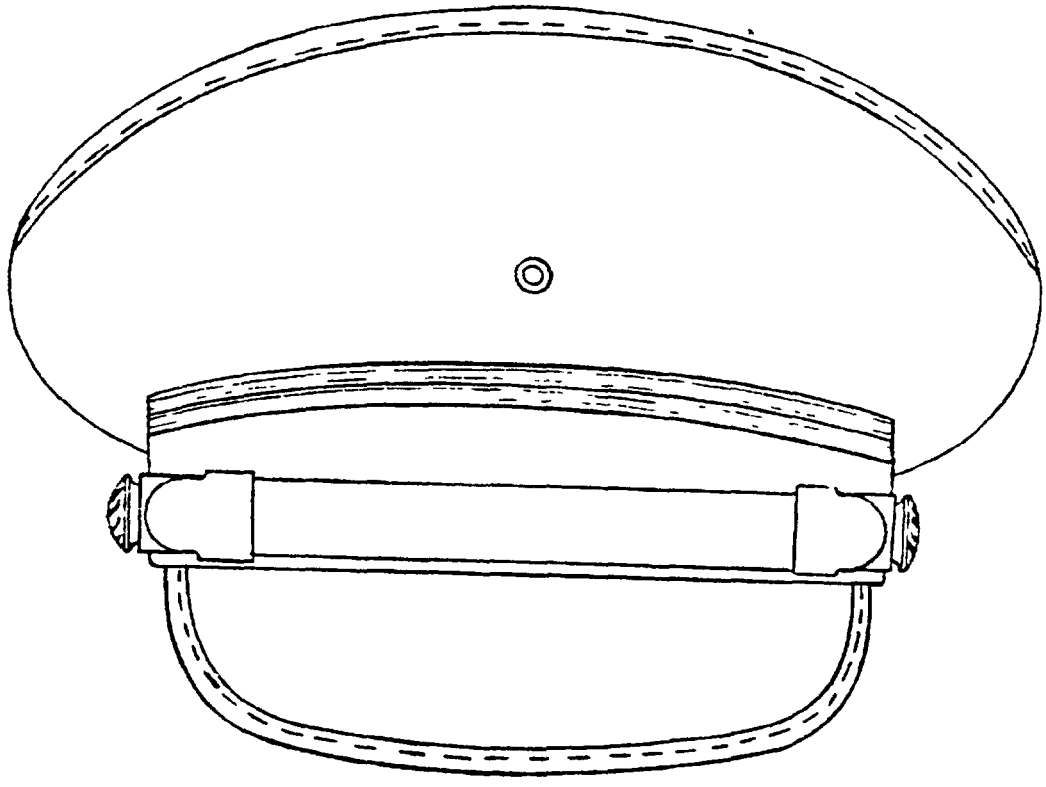


FRONT VIEW

FIGURE 1 CAP, SERVICE, MILITARY POLICE, WHITE

2-1-775

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

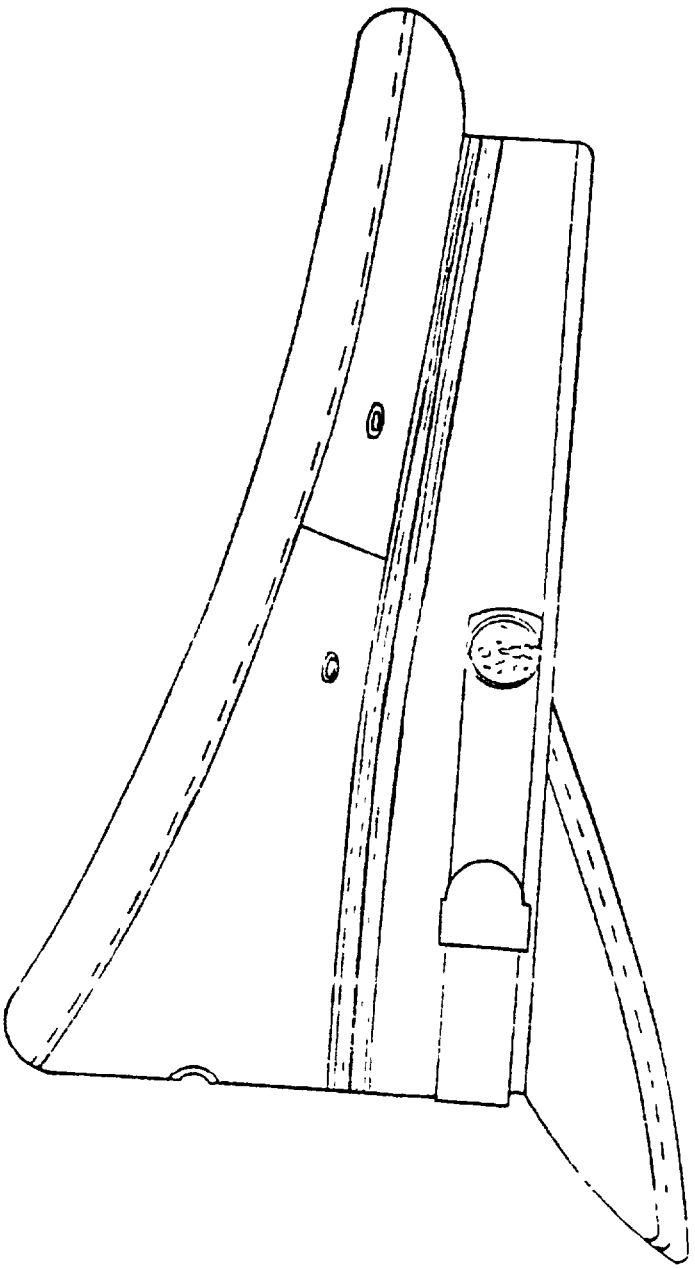

SIDE VIEW

FIGURE 2 CAP, SERVICE, MILITARY POLICE, WHITE
2-1-776

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

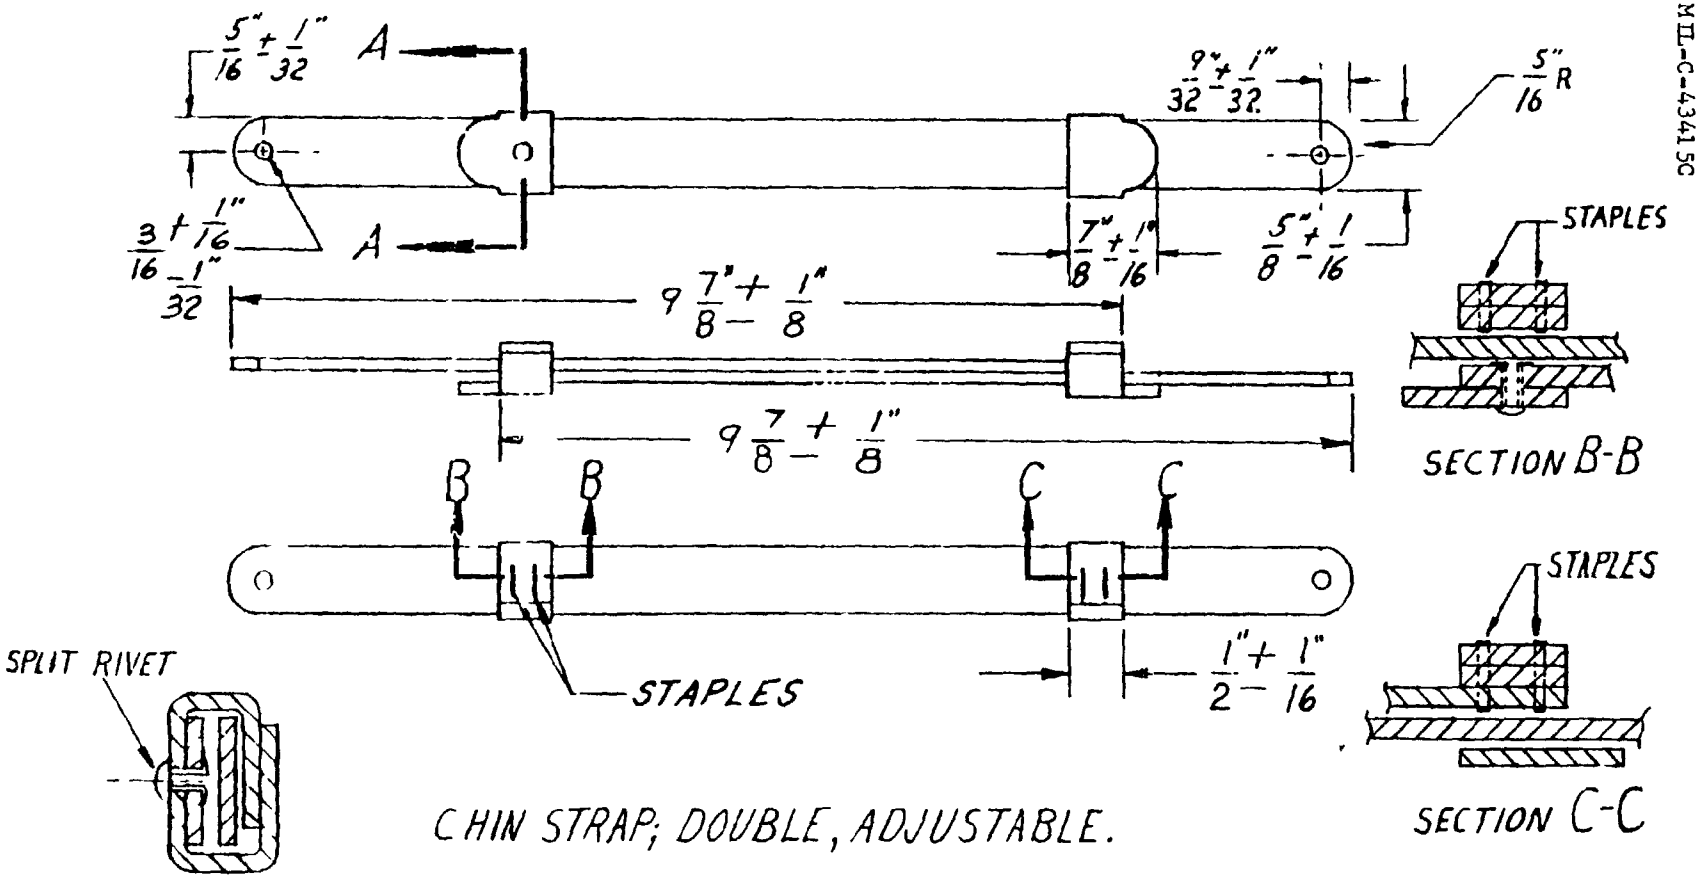


FIGURE 3 CAP, SERVICE, MILITARY POLICE, WHITE

2-1-777 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Instructions for Handling

1. Never pick cap up by grabbing the front edge of the crown. Eventually that practice will cause damage.

2. Always put the cap down right side up, never lay it down on the crown.


3. Never carry the cap crushed under your arm.

4. Pick up your cap by sliding your fingers under the side at the rear of the visor.

5. To clean cap, rub lightly with wet cloth and a mild soap, wipe dry with clean soft cloth. Ornamental elastic braid may be reversed when soiled or washed with soap and water.

FIGURE 4 CAP, SERVICE, MILITARY POLICE
INSTRUCTION LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

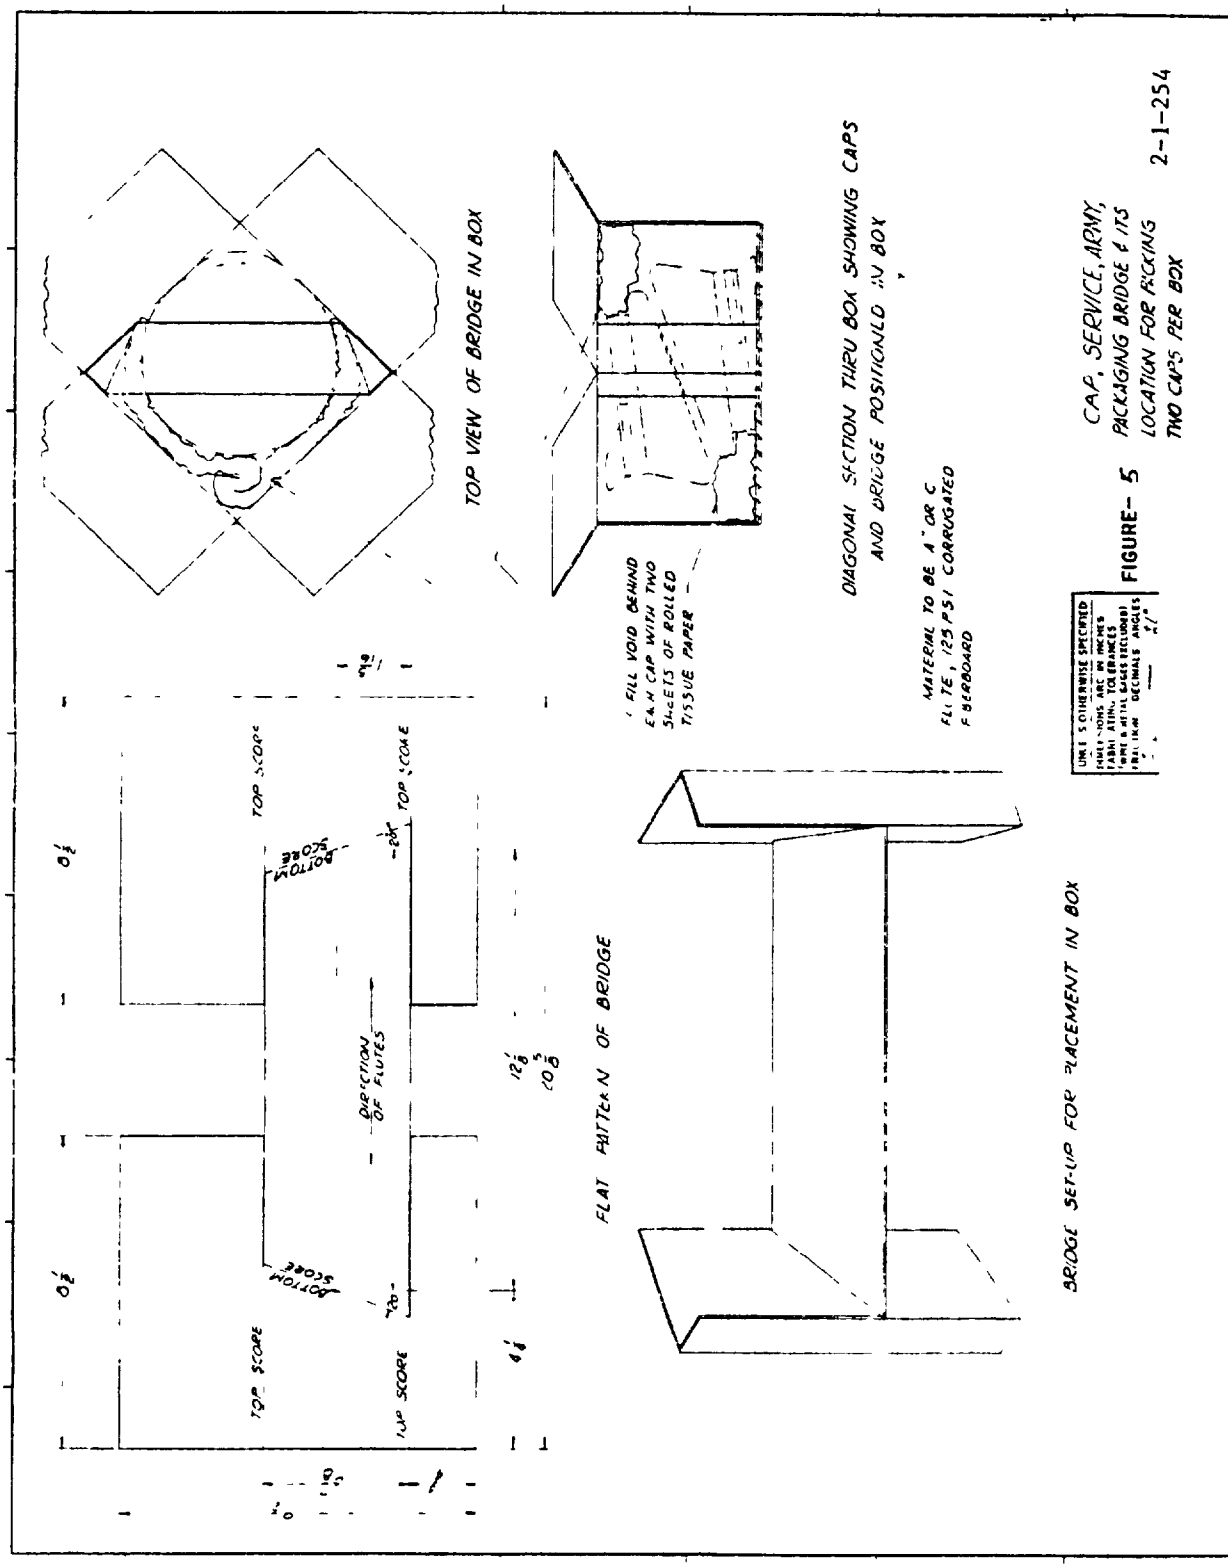

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers vendors or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-43415C - Cap, Service, Military Police, White

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address — Optional) TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 73 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT ~~COMMAND~~LAB.
NATICK MASSACHUSETTS 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development ~~COMMAND~~LABORATORIES
ATTN DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.