INCH-POUND

MIL-DTL-43415D
4 September 2003
SUPERSEDING
MIL-C-43415C
3 October 1980

DETAIL SPECIFICATION

CAP, SERVICE, MILITARY POLICE, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for a service cap made of a coated knitted material.

1.2 Classification. The cap should be in the following classes and sizes (see 6.2).

1.2.1 Classes.

Class 1 - Army
Class 2 - Air Force

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may of use in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-CRDD, 700 Robbins Avenue, Bldg. 6D, Philadelphia, PA 19111-5092 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

1.2.2 Sizes

6-3/8	6-1/2	6-5/8	6-3/4	6-7/8
7	7-1/8	7-1/4	7-3/8	7-1/2
7-5/8	7-3/4	7-7/8		

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-52094	-	Thread, Cotton
A-A-59517	-	Cloth, Coated or Laminated, Polyvinyl chloride (Artificial Leather)
V-T-295	-	Thread, Nylon
CCC-C-432	-	Cloth, Cotton, Sheeting (Unbleached, Bleached and Dyed)

DEPARTMENT OF DEFENSE

MIL-B-3461	-	Buttons, Insignia, Metal, Uniform and Cap
NASM20652	-	Eyelets, Metallic, and Eyelet Washers, Metallic
MIL-DTL-32075	-	Label: For Clothing, Equipage and Tentage (General Use)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION SHEETS

DEPARTMENT OF DEFENSE

NASM20652/1 - Eyelets, Metallic, Rolled Flange Type; and Eyelet Washer

STANDARDS

FEDERAL

FED-STD-601 - Rubber: Sampling and Testing

DEPARTMENT OF DEFENSE

MIL-STD-657 - Provisions for Evaluating Quality of Service Caps

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

RULES AND REGULATIONS UNDER TEXTILE
FIBER PRODUCTS IDENTIFICATION ACT

(Copies may be obtained without charge from the Federal Trade Commission, Washington, DC 20580-0011.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

ASTM INTERNATIONAL

ASTM B117 - Salt Spray (Fog) Testing
ASTM D276 - Identification of Fibers in Textiles
ASTM D747 - Apparent Bending Modulus of Plastics by Means of a Cantilever Beam

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

ASTM D751 - Coated Fabrics, Hydrostatic Resistance
ASTM D1593 - Non-Rigid Vinyl Chloride Plastic Film and Sheeting
ASTM D3776 - Mass Per Unit Area (Weight) of Woven Fabrics
ASTM D3887 - Tolerances for Knitted Fabrics
ASTM D4976 - Polyethylene Plastic Molding and Extrusion Materials
ASTM D5034 - Breaking Force and Elongation of Textile Fabrics (Grab-Test) CRE
ASTM D6193 - Stitches and Seams

(Applications for copies should be addressed to ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC 8 - Colorfastness to Crocking: AATCC Crockmeter Method
AATCC 16 - Colorfastness to Light
AATCC 20 - Fiber Analysis: Qualitative
AATCC 61 - Colorfastness to Laundering

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P. O. Box 12215, Research Triangle Park, NC 27709-2125.)

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)

TAPPI T408 - Bursting Strength
TAPPI T410 - Basis Weight
TAPPI T411 - Thickness

(Applications for copies should be addressed to Technical Association of the Pulp and Paper Industry (TAPPI), P.O. Box 105113, Atlanta, GA 30348-5113.)

AMERICAN SOCIETY FOR QUALITY CONTROL

ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American Society for Quality Control (ASQC), P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 53201-4606.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to the first article inspection in accordance with 4.2 and 6.3.

3.2 Materials.

3.2.1 Basic material. The basic material shall be vinyl coated cloth (artificial leather), untreated, white, in accordance with Class 7 of A-A-59517, but with the following exceptions:

(a) The widths of the base and coated cloths are not required.
(b) The commercial designation of the base cloth shall be 3.70 ounces per square yard.
(c) The weight of the coated cloth shall be 15.0 ounces per square yard (minimum).
(d) The coating weight shall be 12.0 ounces per square yard (minimum).

3.2.1.1 Grain. The grain shall be a simulated twill weave embossing.

3.2.2 Front piece supporter. The material for supporting the front piece shall be a nylon mesh type, white, knitted on a single needle bar Raschel provided with ground and inlay guide bars. The mesh cloth shall be single face with a knitted chain effect on the back and shall contain laid-in threads every other course. The pattern (design) shall be as shown in the standard sample. The finished cloth shall meet the physical requirements when tested as specified in 4.3.2.

Weight, oz./ sq. yd. (min.)	7.0
Wales per inch (min.)	12.0
Courses per inch (min.)	25.0
Stiffness (load pounds):	
Parallel to wales	0.120 to 0.160
Parallel to courses	0.200 to 0.240

3.2.3 Crown protector. The material for the crown protector, personal label pocket, and binding shall be 0.0040 ± 0.0004 inch thick flexible film in accordance with ASTM-D-1593. The personal label pocket shall be heat or electronically sealed to the crown protector and the strength of the seal shall meet the bondability requirement of ASTM-D-1593.

3.2.4 Inner body band. The material for the inner body band shall be of high density (linear) white polyethylene plastic in accordance with ASTM-D-4976. Thermal stress cracking resistance, low-temperature brittleness, and dielectric constant and dissipation factor shall not apply. The bands shall be extruded or stripped, slit or cut, 2 ± 1/16 inches wide and 0.030 ± 0.002 inch thick and have a stiffness (scale reading) between 15 and 31 inclusive. Testing shall be as specified in 4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.5 Sweatband. The artificial leather for the sweatband shall be 1-1/4 ± 1/8 inches wide, and dyed a brown shade, and shall be in accordance with A-A-59517.

3.2.6 Front stay. The front stay shall be made of the following components and shall meet all the requirements when tested as specified in 4.3.2.

3.2.6.1 Twin wire tape. The twin wire tape shall be a commercial type, measuring 1 ± 1/8 inches wide. The steel wire shall be hard rolled, cold finished carbon steel, galvanized, flat wire and shall be 0.016 ± 0.001 inch thick by 0.90 ± 0.004 inch wide.

3.2.6.2 Plastic. The plastic reinforcement shall be 0.020 ± 0.002 inch thick, natural color, linear polyethylene or polypropylene.

3.2.6.3 Stay cover and sweatband. The material for the stay cover and sweatband reinforcement piece shall be a 5-harness warp sateen cloth, natural or bleached, weighing 7.4 ± 0.8 ounces per square yard. The reinforcement piece may be print or sheeting cloth.

3.2.7 Visor. The visor material shall be made of four layers: top ply, plumper paper, inner core and bottom ply, laminated together with a suitable adhesive. The polished side of the top ply shall be towards the top of the visor and the coated side of the bottom ply shall be towards the bottom of the visor. The plumper paper shall be positioned between the top of ply and the inner core. Testing shall be as specified in 4.3.2.

3.2.7.1 Top ply. The top ply shall be a vinyl film 0.020 inch thick conforming to ASTM-D-1593. The film shall be black, and one side shall be pressed polished to produce a smooth shiny pattern leather surface.

3.2.7.2 Plumper paper. The plumper paper shall be a high alpha cellulose wood pulp paper which has been wet-web saturated with 10 to 15 percent by weighed chloroprene latex. The saturated paper shall have a bone dry weight of 0.62 ± 0.062 pounds per square yard and a thickness of 0.022 ± 0.003 inch. Testing shall be as specified in 4.3.2.

3.2.7.3 Inner core. The inner core shall be made of fiberboard and shall be free of surface lumps, indentations, ripples, ridges, and cracks and shall conform to the following physical requirements when tested as specified in 4.3.2.

Basic weight, lb./1000 Sq. ft. (minimum)	350.0
Thickness, inches	0.070 to 0.080
Bursting strength, points (minimum)	560.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.7.4 Bottom ply. The bottom ply shall be a pyroxylin-coated cloth.

3.2.7.4.1 Base cloth. The base cloth shall be cloth, cotton, sheeting conforming to Type VII, Class 1 of CCC-C-432, except that the cloth shall be desized and scoured and shall contain not more than 5.0 percent starch and protein material excluding chloroform-soluble and water-soluble material and the requirements for breaking strength, seam efficiency, and shrinkage shall not apply.

3.2.7.4.2 Coating compound. The coating compound shall be 100 percent virgin cellulose nitrate that has been pigmented and plasticized to meet the requirements specified herein.

3.2.7.4.3 Coated cloth. The coating shall be applied on the face side of the base cloth only, and there shall be no striking through of the coating to the back of the cloth. The coated cloth shall meet the requirements specified in Table I and when tested as specified in 4.3.2.

TABLE I. Physical properties of coated cloth

Characteristic	Requirement (min.)
Weight, oz./sq. yd.	6.3
Breaking strength, lb.	
Warp	50
Filling	40
Hydrostatic resistance	No leakage
Colorfastness to crocking	“3-4” or “good”

3.2.7.4.3.1 Color. The color shall be Hatter’s green and shall match the standard sample (See 6.3). under artificial daylight having a color temperature of 7500 Kelvin (K) and shall be a good approximation to the standard sample under incandescent lamplight at 2800 K.

3.2.7.5 Fabrication. The visor shall be cut in strict accordance with the pattern furnished. The outside edge shall be bound with the plastic film specified in 3.2.8, stitched 1/32 +1/32, -0 inch from folded edge of binding on top of visor with a 4-ply cotton thread as specified in 3.2.16 with 6 to 8 stitches per inch, using type stitch 301, seam type BSb-1, of ASTM-D-6193. The binding shall finish 3/16 to 1/4 inch in width on top and bottom of visor with polished side showing. The visor shall be molded into a curved shape as shown by the standard sample.

3.2.8 Plastic film. The plastic film for the band, visor binding, band binding and the sweatband welt shall be 0.010 inch thick and conform to ASTM-D-1593. The band and visor and band binding shall be black and the sweatband welt shall be brown.

3.2.9 Chin strap. The chin strap material shall be made of two layers (see 4.3.2); top ply and bottom ply of the following materials, laminated together with a suitable adhesive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.9.1 Top ply. The top ply shall be a vinyl film conforming to the requirements of 3.2.7.1.

3.2.9.2 Bottom ply. The bottom ply shall be a plumper paper conforming to the requirements of 3.2.7.2. In addition, the plumper paper shall be colored black with a colorfast dye and shall not bleed or transfer (see 4.3.2).

3.2.9.3 Rivet, split. The rivet for attaching one of the loops to the strap shall be a strip rivet, approximately 3/16 inch long legs and 1/8 to 3/16 inch diameter, black enameled hand (see 4.3.2).

3.2.9.4 Construction. The chin strap shall conform to the design and dimensions as shown in Figure 3. The polished side of the vinyl film shall be towards the top of the chin strap. The top strap shall be riveted to the top of loop and the button strap shall be stapled to bottom fold of loop when joining ends of loop (see 4.3.2).

3.2.10 Elastic ornamental braid (Class 1 only). The braid shall be a two-color, rayon-elastic, reversible braid conforming to the following requirements and when tested as specified in 4.3.2.

Characteristic	Requirement
Lines	6
Number of carriers	24
Ends per carrier	2
Warp (30-gage rubber)	10
Picks per inch (relaxed, minimum)	68
Pounds per gross yard (minimum)	2.5
Overall width (inches)	15/32 ± 1/32

One-half of the braid shall be Green, and the other half Yellow. The finished braid shall show a “good (rating 3-4)” fastness to light and laundering.

3.2.11 Buttons. The buttons for affixing the chin strap shall be metal, cap, screw-back, 25-line, conforming to Type II of MIL-B-3461. The buttons for the Class 1 cap shall conform to Style 2, Class A, and the buttons for the Class 2 cap shall conform to Style 1.

3.2.12 Eyelets. The eyelets and washers shall be brass, conforming to NASM20652. The side eyelets shall conform to Dash No. BBE 110; the front eyelet to Dash No. BBE 118. The washer for the front eyelet shall conform to BBW 101 of NASM20652/1. The four side eyelets may be tacked with washers.

3.2.13 Sweatband reinforcement strip. The reinforcement piece shall be a strip of cotton print cloth or cotton sheeting cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.2.14 Staples. The staples shall be stamped from wire, 0.025 ± 0.005 inch thick. The wire shall be steel, Monel metal, brass or stainless steel. If ordinary carbon steel is used, it shall have a non-corrosive finish capable of withstanding not less than 25 hours of the salt spray test when tested as specified in 4.4. The staples for the inner body band, front stay, and chin strap shall measure 1/4 ± 1/16 inch wide and have divergent prongs 1//4 ± 1/16 inch long. The staples for the button post shall be heavy duty flat, standard clinch 0.005 inch wide, 1/4 ± 1/64 inch long legs, 1/2-inch wide crown when tested as specified in 4.3.2.

3.2.15 Crown support. The crown support shall consist of a steel wire enclosed in a nylon grommet conforming to the following requirements:

3.2.15.1 Steel wire. The steel wire shall be spring steel 5/16 ± 1/16 inch wide and 0.020 ± 0.005 inch thick, cut to required size. The wire shall be completely covered with white pyroxylin coating. The coupling shall be 1 ± 1/8 inches long and zinc or cadmium coated to withstand 25 hours of the salt spray test and when tested as specified in 4.3.2.

3.2.15.2 Nylon grommet. The grommet shall be composed of nylon filling yarn and cotton warp yarns braided to form a grommet, approximately 3/4 inch in diameter. The filling yarns shall be a clear nylon monfilament, 0.012 ± 0.0005 inch diameter. The warp yarns shall be 12 ± 1/2 count singles carded cotton. The grommet shall be made on a 48-carrier braider or 44-carrier braider, with carriers braiding in pairs with a 1/1 weave with one 0.012 inch braiding in pairs on a 1/1 weave with two 0.012 inch diameter nylon monofilament ends per carrier. Right warps or nine warps when a 44-carrier braider is used, of 2 ends of cotton yarns shall be evenly spaced around the circumference interlacings. There shall be not less than 8 picks per inch in the relaxed state. The ends of the grommet shall be joined by the use of wood or cork plugs, laminated paper rings, or other suitable material to insure proper closure of the grommet. Testing shall be as specified in 4.3.2.

3.2.16 Threads. The threads for seaming and stitching shall be cotton, Ticket No. A (Tex 50), 3 ply, when tested in accordance with A-A-52094. The color of the threads shall be White (for seaming and stitching), Black, Shade AA (for stitching binding to cap and outer band and visor and sweatband welt to cap), and Goldenlite, Shade AJ (for elastic braid stitching, Class 1 only). The thread for zigzag stitching the sweatband and sweatband welt shall be nylon, Dyed Brown Shade A0 conforming to Types I or II, Ticket No. E (Tex 75), 1-ply, when tested in accordance with V-T-295.

3.2.16.1 Colorfastness. The dyed threads shall show “good (rating 3-4)” fastness to light and laundering when tested as specified in 4.3.2.

3.3 Labels. Each hat should have a combination identification-size label and cardboard instruction label (see Figure 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.3.1 Identification-size label. The combination identification-size label shall conform to Type I, Class 4 of MIL-DTL-32075. The label can be applied by either heat-sealable printing or mildew-resistant printing. The label shall contain an item description, contract number, National Stock Number (NSN), size, and contractor's name. The label shall show "good (3-4 rating)" colorfastness to laundering when tested as specified in AATCC 61.

3.3.2 Cardboard instruction label. The printed cardboard instruction label shall be attached by a string not less than 12 inches in length, looped through a hole approximately 1/4 inch in diameter, and attached to one of the chin strap buttons. The label shall measure 4 inches by 3 inches. The text of the label shall be as shown in Figure 4, printed on one side only in letters not less than 1/8 inch in height.

3.3.3 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleach sulfate having a basic weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and should be attached to each item by a fastener. The bar-code shall be clearly legible and readable by scanner. The bar coding element shall be a 13 digit national stock number (NSN). There shall be a 12 digit universal product code (UPC) assigned for all NSN's by the Government. The initial "UPC" must appear beneath the code. The bar codes for NSN and UPC shall be a medium to high density and shall be located so that they are completely visible on the item when it is folded and/or packaged as specified. The label's locations shall cause no damage to the item.

3.4 Designs. The cap shall consist of three sidepieces and a top crown piece with a plastic crown protector. The cap shall have a removable grommet, plastic visor, adjustable chinstrap, and a permanently attached front stay. The center front of cap shall be in vertical alignment.

3.5 Figures. Figures are furnished for information purposes only. If there are any inconsistencies between the written specification and the figures, the written specification shall control.

3.6 Patterns. Standard patterns, which provide a 1/4 inch seam allowance for all seams except where indicated in Table III, will be furnished by the Government. The Government patterns will not be altered in any way and are to be used as a guide for cutting contractor's working patterns. The working patterns will be identical to the Government patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements.

3.6.1 List of pattern parts. The cap shall be cut from the specified material in accordance with the pattern parts indicated in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
Cloth, coated, artificial leather	Crown 1/	1
	Front	1
	Side (quarters)	2
Vinyl plastic film (0.0040 inch thick)	Crown protector 1/	1
Nylon knitted cloth (Raschel)	Front support	1
Laminated visor material	Visor (to show size and shape)	1
	Front stay	
Cotton sateen cloth	Cover	1
Polyethylene or polypropylene (0.020 inch thick)	Reinforcement	1

1/ Same pattern part.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types as specified in Table III shall conform to ASTM-D-6193. Whenever two or more methods of seam/stitch types are given for the same part of the operation, any one of them may be used. Where stitch types 101 or 401 is used, the chain or underside of the stitch shall be on the inside of the cap.

3.7.1.1 Seam type. Seam types shall be as specified in Table III, with seam allowances maintained and seams sewn so that no raw edges, runoffs, twist, pleats, puckers, or open seams result.

3.7.1.2 Thread breaks and ends of seams. Ends of all seams and stitchings, produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch, except that ends of a continuous line of stitching shall overlap and shall not be backtacked, regardless of stitch type used. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 or 101 stitch type) may be repaired using 301 stitch type.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table III.

3.8 Manufacturing operation requirements. The cap shall be manufactured in accordance with operation requirements specified in Table III. The contractor is not required to follow the exact sequence of operations shown.

3.8.1 Marking. The components of the cap shall be marked to insure a uniform shade and size. Any method of marking may be used except:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

(1) Corrosive metal fastening devices.
(2) Sew-on type tickets.
(3) Adhesive type tickets which leave an impression or traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
1.	Cutting. a. Cut all parts in accordance with pattern parts furnished which show directional lines, size, and notches for proper assembly. Cut crown piece, front piece, sides (quarters) and outer band from one piece of material. b. Cut outer band, with the length of the band in the direction of the wales, 2 ± 1/16 inches wide. c. Cut plastic film for band binding 1 to 1-1/4 inches wide. The cut binding may be placed on rolls. d. Cut elastic braid to finish snugly around outside of outer band (see Operation 17). e. Cut plastic for sweatband welt, 3/4 ± 1/16 inch wide.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-657 and 4.4 shall be removed from production and replaced with nondefective and properly matched components.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements – continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
3.	Shade and size marking. Mark, ticket or bundle all component parts made of the basic material to insure a uniform shade and proper assembly throughout the cap.					
4.	Make inner body band. a. Cut inner body band to proper length. b. Overlap ends of band 3/4 to 1-1/4 inches and secure with two staples through the overlap portion.					
5.	Join crown protector to crown. Finished appearance. The crown protector shall not be exposed on the outside of the finished cap. The crown protector shall not be twisted in the stitching. a. Position the identification card holder protector with the 3 ± 1/8 inch sides toward the front and back of the cap and the 1-5/8 ± 1/8 inch sides toward the sides of the cap. The card holder shall be centered (1/2 inch off center tolerance) and 2-1/2 inches from the front edge of the crown protector.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
5.	Join crown protector to crown. (cont'd)					
	b. Attach identification card holder to crown protector by heat or electronic sealing along three sides, with one 1-5/8 inch side left open for inserting the identification card.					
	c. Superimpose crown protector on crown, 1/16 to 3/32 inch from edge.	301 or 101	SSa-1	6-8	A A	A
6.	Join sides and front of cap.					
	Finished appearance. The sides (quarters) and front of cap shall be joined without twisting or puckering. The seams shall be pressed open					
	Join sides and joint front to sides.	301	SSa-1	8-10	A	A
7.	Attach front support to front.					
	Finished appearance. The front support shall lie flat and smooth without puckers or twists.					
	Superimpose front support on front as indicated by notches on pattern and stitch support to front, 1/16 to 1/8 inch from edge, along top edge and along bottom edge from each side seam to cut out portion of front support. Stitching shall not continue along cut out portion of front support.	301 or 101	SSa-1	6-8	A A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
8.	Make front stay.					
	a. Position the reinforcement on the cotton cover as indicated by notches on pattern.					
	b. Fold sides of cotton cover over reinforcement toward center and stitch through all plies with two rows of vertical stitching 1-1/4 to 1-5/16 inches gage, and centered on stay.	301	----	8-10	A	A
	c. Stitch across top of stay 5/8 to 3/4 inch from top edge of stay, catching edge of plastic reinforcement in the stitching.	301	----	8-10	A	A
	d. Insert the twin wire tape, cut 3-3/8 to 3-1/2 inches long, between rows of stitching, positioned between plastic and cover.					
9.	Make band.					
	Join back seam of band and press seam open.	301	SSa-1	8-10	A	A
10.	Join band to sides and sides to crown.					
	a. Position band on sides with back seams aligned and stitch band to sides.	101 or 301	SSa-1	8-10	A A	A
	b. Position crown to sides as indicated by marks on pattern and stitch crown to sides catching the top of front stay in the stitching at center front of cap. Place a second row of stitching, centered between the first row of stitching and the raw edge.	301	SSa-2	8-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
10.	Join band to sides and sides to crown. (cont'd)					
	c. Turn crown seam and side seam allowance towards crown and raise stitch crown, 1/16 to 3/32 inch from turned edge.	301	LSq-2(b)	8-10	A	A
11.	Set eyelets.					
	a. Position one eyelet in center of front-piece (+ 1/8 inch off center tolerance) and 1 + 1/8 –0 inches above top edge of band, measured to center of eyelet. The eyelet shall be inserted through the front and front stay and shall be backed with a washer					
	b. Insert two eyelets in each side of cap, through front and support and through side quarters, positioned 1 + 1/8, -0 inches from top edge of band and 1 + 1/8 inches from each side of the front and side joining seams. Measurements shall be to center of eyelets. The eyelets may be backed with a washer.					
12.	Set inner body band.					
	Finished appearance. The inner body band and the binding shall be so attached in the cap that there will be no twisting, puckering or distorting of the outer band. The front stay shall be between the inner body band and the binding on the finished cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
12.	Set inner body band. (cont'd) The overlapped ends of the inner body band shall be in the back portion of the cap not closer than 1/2 inch of center back seam. a. Reverse inner body band and outside band and position inner body band to outer band with edges even. b. Stitch bands together through seam allowance of outer band and side, with stitching 1/8 to 3/16 inch from edge. c. Turn cap, position bottom edge of front stay even with bottom edge of inner body band on inside of cap and staple front stay to inner body band with staple 1/2 to 5/8 inch from bottom edge and centered (+ 1/8 inch) on front stay. Pull down outer band snugly around inner band. The prongs of the staple shall be clinched on the inside of the cap and shall be through the twin wire tape. Staple specified in 3.2.14.1 shall be used. d. Superimpose ends of plastic binding and join ends of binding, 1/8 to 1/4 inch from raw ends. Press seam open. e. Position raw edge of plastic binding to outside bottom edge of outer band and stitch binding to outer band 3/16 to 1/4 inch from bottom edge of band.	301 301 or 101 301	SSa-1 SSa-1 SSa-1	8-10 8-10 6-8	A A black A black A black	A A black A black

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
12.	Set inner body band. (cont'd)					
	f. Turn binding to inside of cap and stitch through all plies 1/16 to 3/32 inch from top turned edge of binding, with bottom edge of front stay caught in the binding and side edge of label caught in the stitching 1 ± 1/2 inches to the right or left of center back seam. The binding shall finish 1/4 to 5/16 inch wide on outside of band. The joining seam of the binding ends shall be in line with back seam of band. The polished side of the binding shall be showing.	301	EFb-1	6-8	A black	A black
13.	Set visor.					
	Finished appearance. The visor shall be uniformly set and the band shall not be distorted or twisted in the setting.					
	Position visor to inside of inner body band with visor notch centered with front of cap and stitch visor to cap.	301	LSa-1	6-8	16-4	16-4
14.	Make and attach sweatband.					
	Finished appearance. The abutted edges of sweatband and sweatband welt shall be centered (1/4 inch tolerance) with the center back seam of cap. The sweatband shall finish smooth and flat without distortion to provide a comfortable fit.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
14.	Make and attach sweatband .(cont'd) Neither the edge of the welt nor the edge of the sweatband shall be exposed beyond the lower edge of cap.					
	a. Fold welt in half lengthwise. Position edge of sweatband 1/16 to 3/32 inch from turned edge of welt and join with a row of zigzag stitching.	304	----	12-14	E	E
	b. Butt ends of sweatband and welt and join with a row of zigzag stitching, reinforced on the underside with a 5/8 ± 1/16 inch strip of cotton fabric.					
	c. Position finished sweatband to cap and stitch to cap with stitching through welt and adjacent to edge of artificial leather sweatband.	301	----	6-8	16-4	16-4
15.	Block caps. Finished appearance. The caps shall be uniformly blocked and shall not be distorted in the blocking.					
16.	Position socket holes and attach buttons and chin straps. Finished appearance. The chin strap shall fit smooth and snug to band of cap without twists or distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches per Inch	Thread	
					Needle	Bobbin/ Looper
16.	Position socket holes and attach buttons and chin straps. (cont'd) a. Position socket holes on the band so that the center of each socket is 5-5/8 ± 1/16 inches each side of center front of cap and 7/16 + 1/16, -0 inch from bottom edge of band. b. Neatly punch the bottom socket holes through band, inner body band. c. Insert bottom socket posts and stitch through inner body band. The socket post shall be positioned so that the eagles on the buttons will be in an upright position when buttons are secured. -- or -- The button socket posts shall be inserted and a securing staple clinched tightly over the center of the screw tube flange on the inside of the band. d. Attach chinstrap to post and attach buttons into the posts with the eagle in an upright position. The outer band shall not show between binding and chinstrap.	Hand	----	4-6	A	----

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

ABLE III. Manufacturing requirements - continued

No.	Operation	Stitch Type	Seam & Stitching Type	Stitches Per inch	Thread	
					Needle	Bobbin/ Looper
17.	Make elastic braid band (Class 1 only). Finished appearance. The elastic band shall finish snugly and flat around outside of band without slipping and falling out of position. a. Double lap ends of braid and join with a box stitch, or box tack with stitching 1/16 to 3/32 inch from edges. Overlap shall measure not less than 3/8 inch. b. Place elastic band around outside of cap band positioned with top edge of braid adjacent to sides of cap with lapped seam of braid even with back seam of cap. The green portion of the braid shall be towards top of cap.	301	LSc-Box	8-10	A Gold	A Gold
18.	Clean caps, insert grommet and attach instruction label. a. Trim all thread ends, remove loose threads, spots, stains, and shade tickets without injuring the material. b. Insert grommet into the crown. The grommet shall be centered on crown seam, evenly distributed and fit snugly in the cap. Plug shall be at center back. c. Attach cardboard instruction label string to one of the chinstrap buttons.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished dimensions for the cap shall conform to Table IV. All measurements and tolerances are expressed in inches.

TABLE IV. Finished measurements

Height of cap at front (measured at the point where band joins the visor to center of crown seam).	4-1/2 ± 1/16
Width of quarters at side seams (measured from band joining seam to crown joining seam).	2-1/8 + 1/8 –1/16
Width of frontpiece at center front (measured from band joining seam to crown joining seam).	2-3/4 ± 1/8
Width of sides at backseam (measured from band joining seam to crown joining seam).	1-7/8 ± 1/8
Width of visor (measured on upper side at center front).	2 ± 1/16
Width of finished band (measured from side seam to bottom edge of band).	1-3/4 + 1/8

Head measurement 1/	Size of cap	Length of crown 2/ (from seam to seam)	Width of crown 2/ (from seam to seam)
20-1/8	6-3/8	10-3/8	10
20-1/2	6-1/2	10-1/2	10-1/8
20-7/8	6-5/8	10-5/8	10-1/4
21-1/4	6-3/4	10-3/4	10-3/8
21-5/8	6-7/8	10-7/8	10-1/2
22	7	11	10-5/8
22-3/8	7-1/8	11-1/8	10-3/4
22-3/4	7-1/4	11-1/4	10-7/8
23-1/8	7-3/8	11-3/8	11
23-1/2	7-1/2	11-1/2	11-1/8
23-7/8	7-5/8	11-5/8	11-1/4
24-1/4	7-3/4	11-3/4	11-3/8
24-5/8	7-7/8	11-7/8	11-1/2

1/ All head measurements + 1/8 –1/4 inch.
2/ All crown measurements ± 3/16 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

3.8 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable material should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

b. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in MIL-STD-657 and 4.3.1.

4.3 Conformance inspection. In accordance with 4.1, conformance inspection shall include the examination specified in 4.3.1.and the tests specified in 4.3.2 Sampling for inspection shall be performed in accordance with ASQC Z1.4

4.3.1 Component and material testing. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition to testing provisions specified in referenced documents, components shall be tested for the characteristics specified in Table V. Testing conditions defined in FED-STD-601 shall be acceptable except in a case of dispute. Tests shall be conducted with both the specimen and test apparatus under standard conditions as defined in the various ASTM, AATCC, and TAPPI test methods. All requirements are applicable to the sample unit. All test reports shall contain the individual values utilized in expressing final results. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. Unless otherwise specified in subsidiary specifications, sampling shall be as follows:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Component	Lot size expressed as	Sample unit for testing
Nylon knitted cloth	Yards	1 yard, full width
Polyethylene, high density	Yards	1 yard
Twin wire tape	Yards	2 feet
Linear polyethylene or polypropylene	Yards	1 yard, full width
Cotton sateen cloth	Yards	1/2 yard, full width
Visor	Each	3 complete
Visor bottom ply	Yards	1-1/2 yards, full width
Chinstrap	Each	3 complete
Elastic ornamental braid (Class 1 only)	Yards	1 yard
Staples (each size)	Gross	15 each
Crown support	Each	1 each
Nylon grommet	Each	1 each

4.3.2 Testing. The ASTM, AATCC, and TAPPI methods of testing as specified in Table V shall be followed. The physical requirements apply to the result of the determinations made on a sample unit for test purposes as specified in the applicable test methods.

TABLE V. Testing

Component	Characteristic	Requirement	Test method
Nylon knitted cloth (for front piece supporter)	Material identification	3.2.2	ASTM-D-276
	Type of knit	3.2.2	Visual
	Weight	3.2.2	ASTM-D-3776
	Construction:	3.2.2	
	Wales per inch		ASTM-D-3887
	Courses per inch		ASTM-D-3887

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Testing - continued

Component	Characteristic	Requirement	Test method
Polyethylene for inner body band	Width	3.2.4	2121 1/
	Thickness	3.2.4	2011 1/
	Stiffness	3.2.4	see 4.5.1
Twin wire tape	Material identification	3.2.6.1	Visual
	Thickness	3.2.6.1	Measurement 3/
	Width	3.2.6.1	Measurement 3/
Linear polyethylene or polypropylene	Material identification	3.2.6.2	Visual
	Color	3.2.6.2	Visual 3/
	Thickness	3.2.6.2	2011 1/
Cotton sateen cloth	Weight	3.2.6.3	ASTM-D-3776
	Color	3.2.6.3	Visual 3/
Visor	Number of layers	3.2.7	Count 3/
	Construction:	3.2.7	Visual 2/
	Plumper paper:	3.2.7.2	
	Material identification		Visual
	Weight		see 4.5.2
	Thickness		TAPPI T411
	Inner core:	3.2.7.3	
	Material identification		Visual
	Weight		TAPPI T410
	Thickness		TAPPI T411
	Bursting strength		TAPPI T408
	Bottom ply:	3.2.7.4	
	Base cloth		Visual
	Weight		ASTM-D-3776
	Breaking strength		ASTM-D-5034
	Hydrostatic resistance		ASTM-D-751 4/
	Colorfastness to crocking		AATCC 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Testing - continued

Component	Characteristic	Requirement	Test method
Chin strap	Number of layers	3.2.9	Count 3/
	Bottom ply:	3.2.9.2	
	Color		Visual 3/
	Color bleeding		see 4.5.3
	Color transfer		see 4.5.4
	Rivet, split:	3.2.9.3	
	Length		Micrometer 3/
	Diameter		Micrometer 3/
	Color		Visual 3/
	Construction		Visual 3/
Elastic ornamental braid (for Class 1 only)	Material identification	3.2.10	Visual
	Color	3.2.10	Visual 3/
	Construction:	3.2.10	
	Lines		Count 3/
	Number of carriers		Count 3/
	Ends/carriers		Count 3/
	Warp		Count 3/
	Picks per inch		Count 3/
	Gage of rubber		Count 3/
	Weight	3.2.10	see 4.5.5
	Width	3.2.10	Measurement 3/
	Colorfastness to:	3.2.10	
	Light		AATCC 16, Opt A.
	Laundering		AATCC 61, 1A
Staples	Material identification	3.2.14	Visual
	Wire thickness	3.2.14	Micrometer 2/
	Corrosion resistance	3.2.14	
	(ordinary carbon steel)		ASTM-B-117
	Dimensions:		
	Inner body band, front		
	Stay and chin strap	3.2.14.1	Measurement 3/
	Button post	3.2.14.2	Measurement 3/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

TABLE V. Testing - continued

Component	Characteristic	Requirement	Test method
Crown support	Steel wire	3.2.15.1	
	Material identification	3.2.15.1	Visual
	Dimensions	3.2.15.1	Measurement 3/
	Coating identification	3.2.15.1	Visual
	Coating color	3.2.15.1	Visual 3/
	Coupling size	3.2.15.1	Measurement 3/
	Corrosion resistance	3.2.15.1	ASTM-B-117
Nylon grommet	Material identification:	3.2.15.2	
	Warp		AATCC 20
	Filling		AATCC 20
	Diameter	3.2.15.2	Measurement 3/
	Warp yarn size	3.2.15.2	Visual
	Construction	3.2.15.2	Count 3/
	Type of closure	3.2.15.2	Visual 3/

1/ FED-STD-601 Test Method
2/ The thickness and pressure limitation of the test method shall be deleted and an instrument of proper capacity used.
3/ One determination shall be made on each sample unit and the results shall be reported as "pass" or "fail".
4/ The coated surface shall be exposed to the water for a period of 60 minutes and the hydrostatic head shall be 20 inches. Any penetration of water will be considered a test failure.

4.4 End item identification. Sampling and examination of the end item shall be in accordance with MIL-STD-657 except that the following defects shall be added to the material defects listed therein:

Proxyline coated cloth (underside of visor): Non-uniform or thin coating; uncoated area, or separation of coating from base cloth; tacky, brittle, cracked or checked coating; blister, lump, wrinkle or crease; cut, hole, tear, scratch, or abrasion, spot, stain or streak; color not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

Bar code/Universal Product Code (UPC)/ label/tag: Bar code/UPC omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible: bar code/UPC not visible on folded, packaged item; bar code/UPC causes damage to the item.

4.5 Methods of inspection.

4.5.1 Polyethylene stiffness. The band shall be tested at room temperature, using a span length of 1.0 inch, a moment weight of 1.0 inch pound and measuring the load at 20 degrees on the angular deflection scale.

4.5.2 Plumper paper weight. The specimens of plumper paper for testing shall consist of not less than five sheets, each at least one square foot in area. The area of the specimen shall be deterrmined to the nearest 0.25 percent of its total area, which requires a precision of 0.1 percent in measuring dimensions. The specimens shall then be dried and weighed. Calculate and report the weight per square yard to the nearest 0.001 pound.

4.5.3 Color bleeding. A specimen of plumper paper not less than three square inches in area shall be submerged in approximately 200 ml of boiling distilled water for not less than 30 minutes. After the submersion period, the specimen shall be removed and the water shall be examined for any evidence of color change. Any change in color of the water shall be considered as evidence of color bleeding of the paper and shall be considered a test failure.

4.5.4 Color transfer. Place a specimen of plumper paper on a sheet of white writing paper. Place a weight on the specimen to provide pressure of one pound per square inch. Draw the weighted specimen over the writing paper for a distance of six inches. Repeat the drawing procedure four additional times over the same path. Any evidence of color transfer from the plumper paper onto the writing paper shall be considered a test failure.

4.5.5. Braid weight. One yard of braid shall be weighed under standard atmospheric conditions to the nearest 0.001 pound from each sample unit. The sum of the values determined for each sample unit shall be multiplied by 144, divided by the number of sample units, and reported to the nearest 0.1 pound.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see Figure 5). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cap is intended for wear by male military personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Class and size required (see 1.2).
c. Issue of DoDISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
d. When first article inspection is required (see 3.1, 4.2, and 6.3).
e. Packaging requirements (see 5.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of the Federal Acquisition Requisition (FAR). The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the FAR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurements instruments regarding arrangements for inspection and approval of the first article.

6.4 Subject term (key word) listing

Hat
Headgear
Visor

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.


MILITARY INTERESTS

Custodians:
Army - GL
Air Force - 11

Preparing Activity:
DLA - CT

Project 8405-0341

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

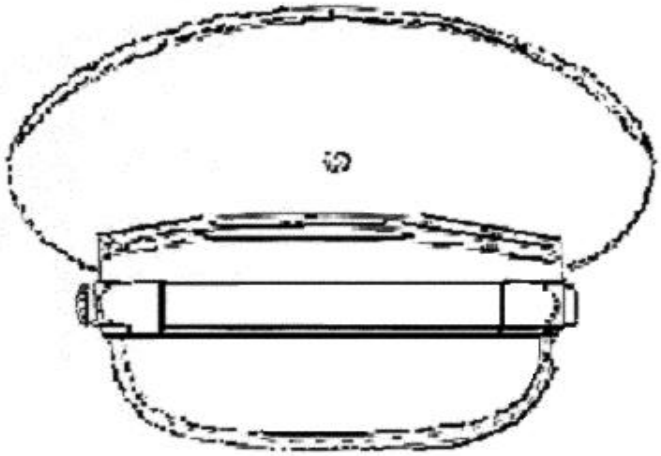

FRONT VIEW

FIGURE 1. Cap, Service, Military Police, White – Front View

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

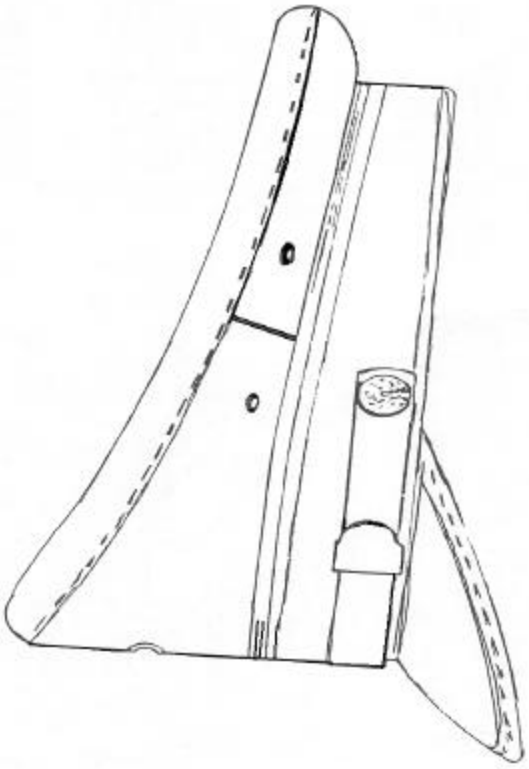


FIGURE 2. Cap, Military Police, White – Side View

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

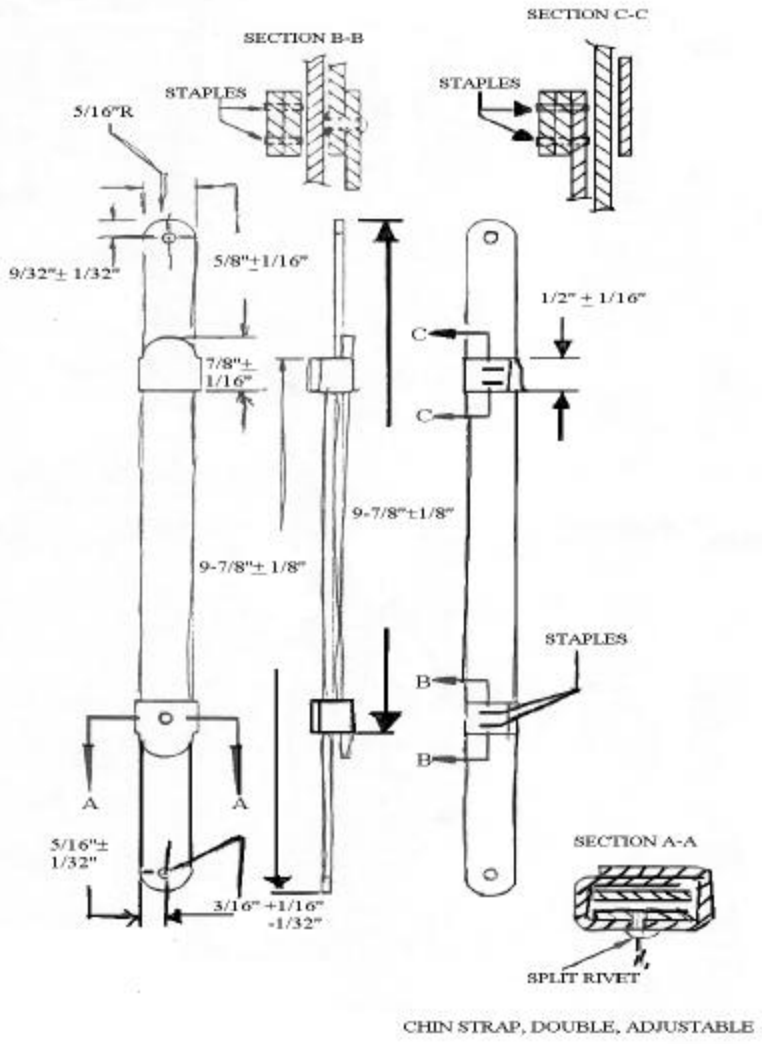


FIGURE 3. Cap, Service, Military Police, White – Chin Strap, Double Adjustable

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

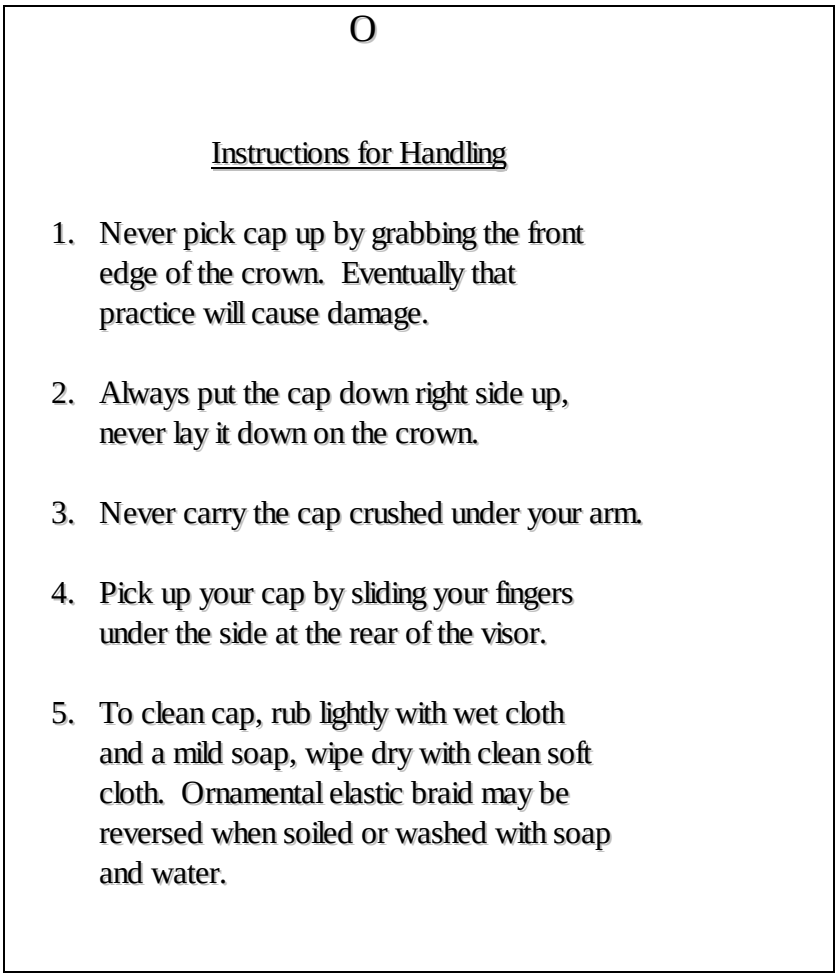


FIGURE 4. Cap, Service, Military Police, White - Instruction Label

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

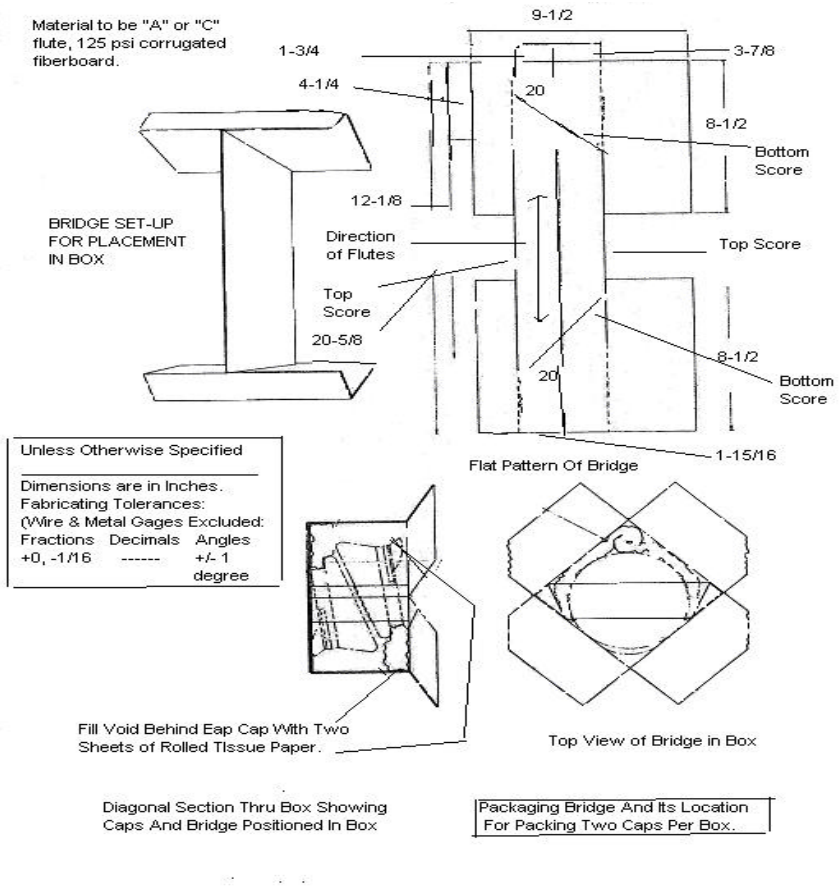


FIGURE 5. Cap, Service, Military Police, White – Packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7 and send to preparing activity.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-43415D	**2. DOCUMENT DATE** ***(YYYYMMDD)*** 20030829

3. DOCUMENT TITLE

CAP, SERVICE, MILITARY POLICE, WHITE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME DEFENSE SUPPLY CENTER PHILADELPHIA DSCP-CRDD (BLDG 6D)	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN (215) 737- 3085 444-3085
c. ADDRESS *(Include Zip Code)* 700 Robbins Ave (Bldg 6, C&T) PHILADELPHIA, PA 19111-5092	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:22Z
Check the source to verify that this is the current version before use.