NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/120
15 November 1996
SUPERSEDING
MIL-B-41809/3F
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUITING SERVICE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

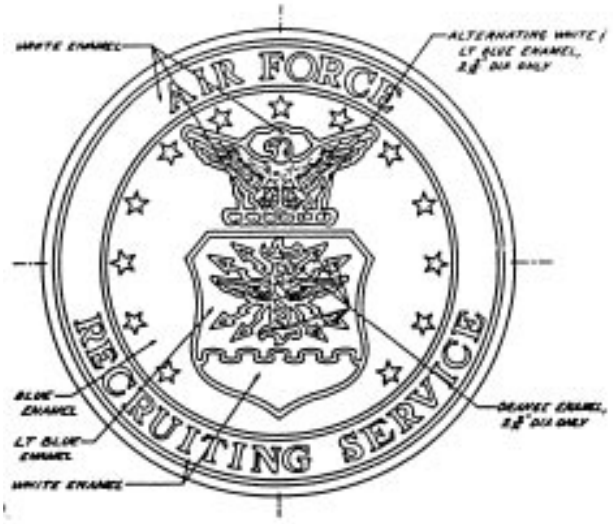


MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

DIMENSIONS:

DIAMETER:
-1: 2-9/16 inches (6.51 cm) (REF)
-2: 1-3/4 inches (4.5 cm) (REF)

THICKNESS (At Thickest Point):
-1: 0.070 inch ± 0.010 inch (0.177 cm ± 0.025 cm)
-2: 0.060 inch ± 0.010 inch (0.152 cm ± 0.025 cm)

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:39Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel color shall be as indicated. The enamel color shall conform to the TIOH chip numbers listed below or the standard sample.

| COLOR | CHIP NUMBER |
|---|---|
| Orange | 7 |
| Blue | 18 |
| White | 28 |
| Light Blue | 30 |

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The six enameled areas of the wreath for Dash No. -1 shall be alternately white and light blue from (viewer's) left to right.

5. Dash No. -1 shall be spherically dapped 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) when measured on the reverse side.

6. Attaching device shall be prong and clutch type. Three prongs shall be located on a 2-1/16 inch ± 1/64 inch (5.24 cm ± 0.04 cm) diameter circle for Dash No. -1 and a 1-1/4 inch ± 1/64 inch (3.18 cm ± 0.04 cm) diameter circle for Dash No. -2. The prongs shall be spaced 120 degrees apart with one prong located on the vertical center at the top of the badge.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0866)


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:39Z
Check the source to verify that this is the current version before use.