NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/122
15 November 1996
SUPERSEDING
MIL-B-41809/12F
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, PERMANENT PROFESSOR, U.S. AIR FORCE ACADEMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

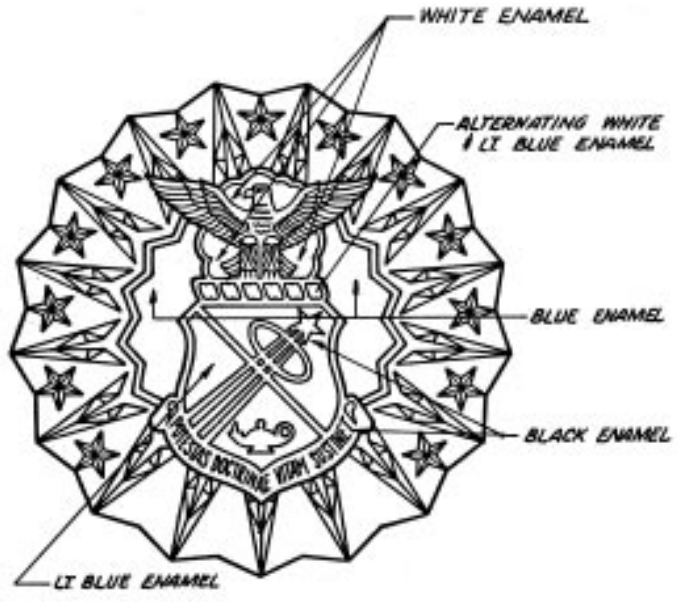

MATERIAL: Gilding Metal

FINISH:
BASE: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
CIRCUMSCRIBED DIAMETER: 2-1/2 inches (6.35 cm) (REF)
THICKNESS (At Edge): 0.060 inch ± 0.010 inch (0.152 cm ± 0.025 cm)
DEVICE:
HEIGHT (Overall): 1-21/32 inches (4.21 cm) (REF)
WIDTH (At Scroll): 1-3/32 inch (2.78 cm) (REF)
THICKNESS (Eagle Breast): 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Black	26
White	28
Light Blue	30

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, 2 rivets shall be used to attach the device to the base.

4. The white enamel (hard enamel or stoning epoxy) in the cloud shall be flooded in and shall not be stoned. Care should be taken to insure the flooded enamel does not cover any portion of the eagle or the gold outline of the cloud.

5. The devise shall be superimposed and secured to the base by two rivets or soft soldered. The rivets shall be soldered to the vertical center line of the device. The vertical center line of the device shall be located on the vertical center line of the base with the tip of the scroll 7/16 inch + 0 - 1/32 inch (1.11 cm + 0 - 0.08 cm) above the bottom of the badge.

6. Attaching device shall be prong and clutch type. Three prongs shall be located on a 2 inch ± 1/64 inch (5.08 cm ± 0.04 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical center line at the top of the badge.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.