INCH-POUND

MIL-DTL-3628/122B
18 June 2015
SUPERSEDING
MIL-DTL-3628/122A
17 July 2014

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, PERMANENT PROFESSOR, U.S. AIR FORCE ACADEMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this 122specification sheet and the issue of MIL-DTL-3628.

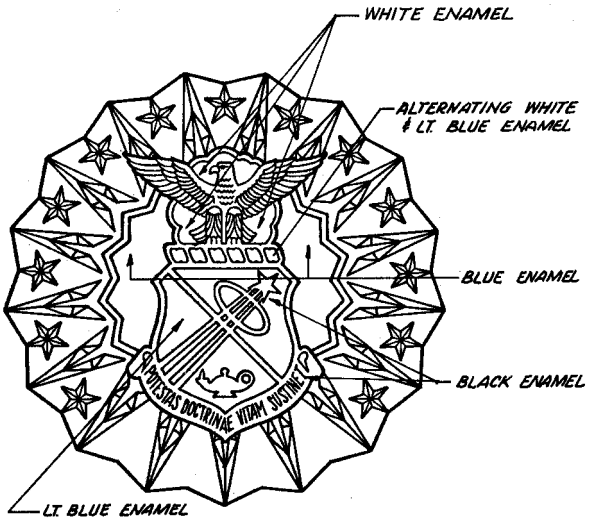

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin, Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Standard Metal Finish Chip Number 16.
DEVICE: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
CIRCUMSCRIBED DIAMETER: 2-1/2 inches (REF)
THICKNESS (At Edge): 0.060 inch $\pm$ 0.010 inch
DEVICE:
HEIGHT (Overall): 1-21/32 inches (REF)
WIDTH (At Scroll): 1-3/32 inch (REF)
THICKNESS (Eagle Breast): 0.100 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. Attaching device shall be prong with pick and flat ball type clutch.

2. Three prongs shall be located on a 2 inch ± 1/64 inch diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical center line at the top of the badge.

3. The devise shall be superimposed and secured to the base by two rivets or soft soldered.

4. The rivets shall be soldered to the vertical center line of the device.

5. The vertical center line of the device shall be located on the vertical center line of the base with the tip of the scroll 7/16 inch + 0 - 1/32 inch above the bottom of the badge.

6. At the option of the manufacturer for commercial sale only, the devise shall be superimposed and secured to the base by two screw posts and nuts. The screw post shall be made from any type brass. The screw post shall be 3/16 inch ± 1/64 inch long with a No. 5-40 UNC-2A thread. The thumb nut shall be 3/8 inch ± 1/64 inch in diameter and shall have a NO. 5-4O UNC-2A thread. The screw posts shall be hard soldered or fused to the device in a location to correctly position the device on the base.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

COLOR	CHIP NUMBER
Blue	18
Black	26
White	28
Light Blue	30

3. The white epoxy (stoning epoxy) in the cloud shall be flooded in and shall not be stoned. Care should be taken to insure the flooded epoxy does not cover any portion of the eagle or the gold outline of the cloud.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2015-354)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.