INCH-POUND

MIL-DTL-3628/124B
17 June 2019
SUPERSEDING
MIL-DTL-3628/124A
5 August 2014

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, FIRE PROTECTION, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

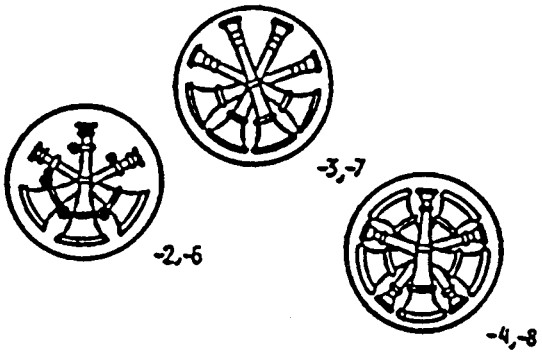

DASH NO.
- -1: Fire Fighter, Regular Size
- -2: Assistant Fire Chief, Regular Size
- -3: Deputy Fire Chief, Regular Size
- -4: Fire Chief, Regular Size
- -5: Fire Fighter, Miniature Size
- -6: Assistant Fire Chief, Miniature Size
- -7: Deputy Fire Chief, Miniature Size
- -8: Fire Chief, Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.

Device:
-1, -5: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-2, -3, -4, -6, -7, -8: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
HEIGHT (Overall):
-1, -2, -3, -4: 2-9/16 inches (REF)
-5, -6, -7, -8: 1-3/4 inches (REF)
WIDTH (Overall):
-1, -2, -3, -4: 1-5/8 inches (REF)
-5, -6, -7, -8: 1-3/16 inches (REF)
THICKNESS OF FORCED AREA (On lettering):
-1, -2, -3, -4: 0.080 inch ± 0.010 inch
-5, -6, -7, -8: 0.070 inch ± 0.010 inch
EDGE DEPTH (Bottom edge)
-1, -2, -3, -4: 0.120 inch ± 0.010 inch
-5, -6, -7, -8: 0.085 inch ± 0.010 inch
DEVICE:
DIAMETER:
-1, -2, -3, -4: 1 inch (REF)
-5, -6, -7, -8: 3/4 inch (REF)
THICKNESS (At Center)(See Note 4):
-1: 0.150 inch + 0.010 inch
-2, -3, -4, -5: 0.125 inch + 0.010 inch
-6, -7, -8: 0.110 inch + 0.010 inch

ATTACHING DEVICE:
1. The device for -2, -3, -4, -6, -7 and -8 shall be secured to the base by two hollow or solid rivets. The rivets shall be located on the horizontal center line, equidistant from each end and 3/4 inch ± 1/64 inch apart for the regular size and 3/8 inch ± 1/64 inch apart for the miniature size. -1 and -5 may be soft soldered or riveted.

2. The attaching device for regular size badges (-1, -2, 3 and -4) shall be a heavy duty pin and side opening catch type. The pin stem shall be 1-3/4 inches ± 1/32 inch long. The joint and catch shall be attached on the vertical center line and equidistant from each end. The joint and catch shall be positioned on the same level plane to each (platform areas on the reverse side may be used for leveling the joint and catch).

3. The attaching device for miniature size badges (-5, -6, -7 and -8) shall be prong and wing type clutch. One prong shall be located on the vertical center line behind the eagle's breast. Two prongs shall be on a horizontal line located 1/2 inch ± 1/32 inch above the base, equidistant from each end and 3/4 inch ± 1/32 inch apart.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.

2. The design of -2, -3, -4, -6, -7 and -8 are identical to the design shown except for the center device.

3. A mock forcer shall be used to bring up the design of the base, eagle and lettering areas. A mock forcer may be used to bring up the design of the device.

4. The overall device thickness shall include the depth of the forced area when a forcer is used.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-254)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:40Z
Check the source to verify that this is the current version before use.