
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA- 334/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

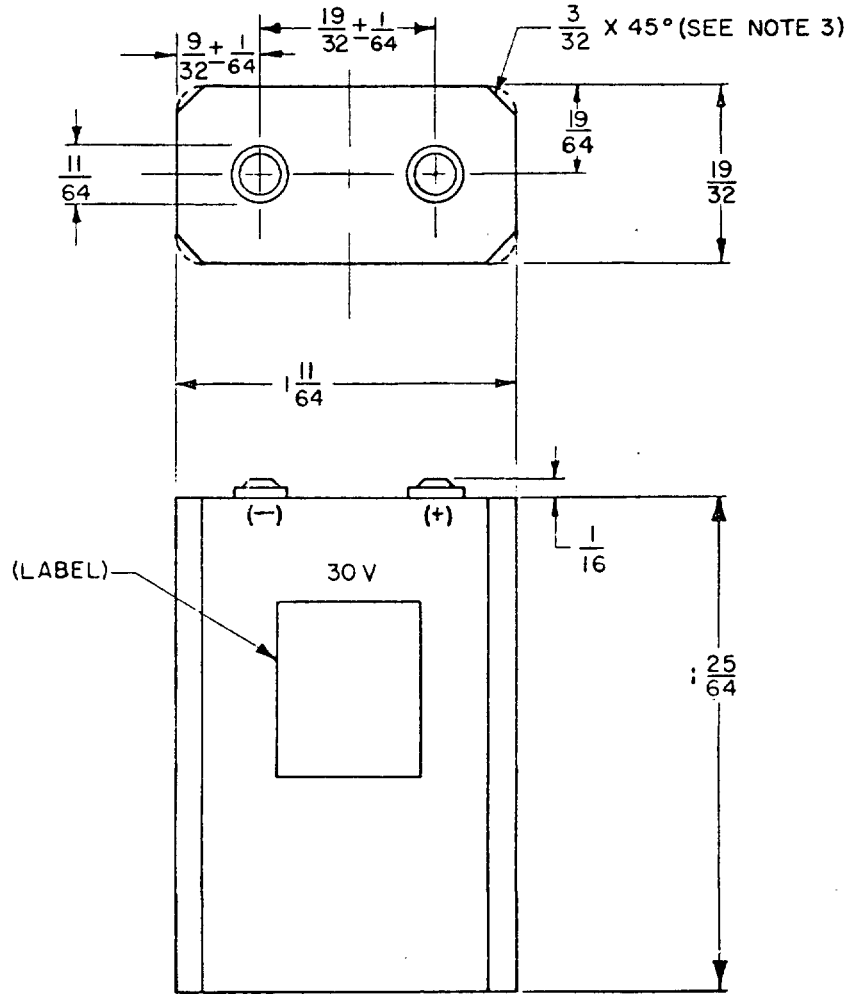

INCHES	MM
1/64	.40
1/32	.79
1/16	1.59
3/32	2.38
11/64	4.37
9/32	7.14
19/64	7.54
19/32	15.08
1 11/64	29.77
1 25/64	35.32

© denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ± 1/32 on fractions.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

3. Beveled or round corners are optional.

DIMENSIONS:

Dimensions and configuration: See figure.

Nominal voltage: 30 volts.

Usual number and type of cells: 20 "FL-1" cells.

Usual cell connection: Series.

Terminals: Flat surface.

Weight (Maximum): 1 ounce.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified in Supplement 1.

First Article inspection:

Vibration test I.
Mechanical - shock test I.
Insulation-resistance test I.
Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test.
Capacity, D (without storage).

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test.
Vibration test I.
Mechanical-shock test I.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	9 months
T	90 days

Discharge - The battery shall be discharged through 40,000 ohms for 12 hours per day, 5 days per week. This cycle shall be repeated continuously to a test-end voltage of 20.0 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking, or, with minimum permissible voltage specified for TS-183( )/U, use load resistance value of 22,220 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
20	26.6

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian: (C)
Army - ER
Navy - SH
Air Force - 99

Preparing activity: (C)
Army - ER

Review activities:

Project Number: (6135-0155-81)

User activities:
Army - ME
Navy - YD, MC

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/22807

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.