
MIL-B-18/211C
21 May 1985
SUPERSEDING
MIL-B-18/211B
21 August 1976

MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-358/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

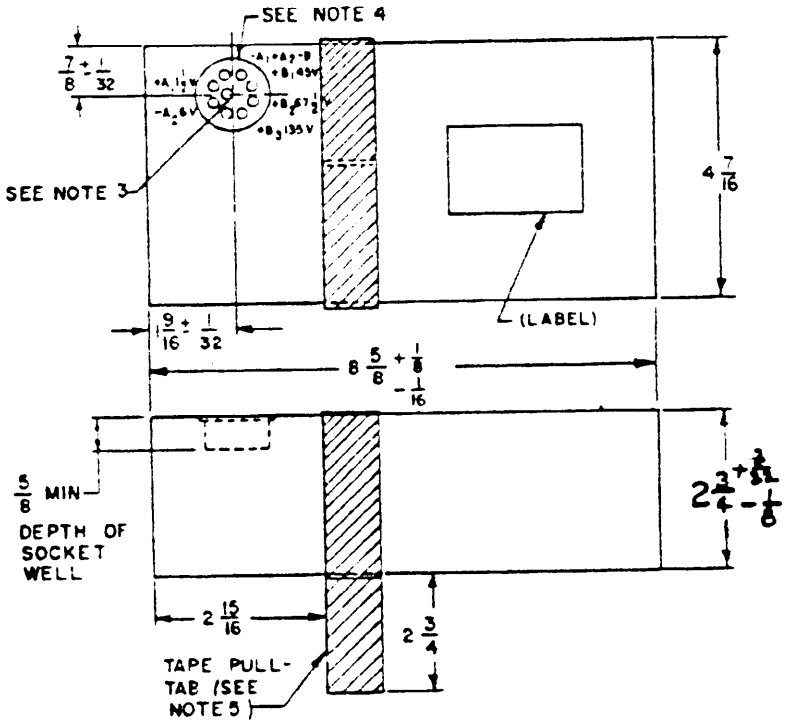

INCHES	MM
.005	.13
1/32	.79
1/16	1.59
.093	2.36
.109	2.77
1/8	3.18
.687	17.45
5/8	15.88
7/8	22.23
1	25.40
1 9/16	39.69
2	50.80
2 3/4	69.85
2 15/16	74.61
4	101.60
4 7/16	112.71
8 5/8	219.08
20	508.00

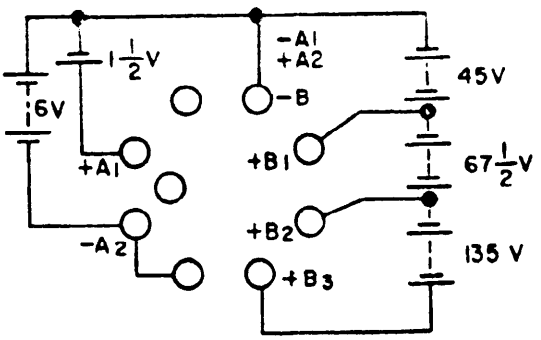

TYPICAL SCHEMATIC

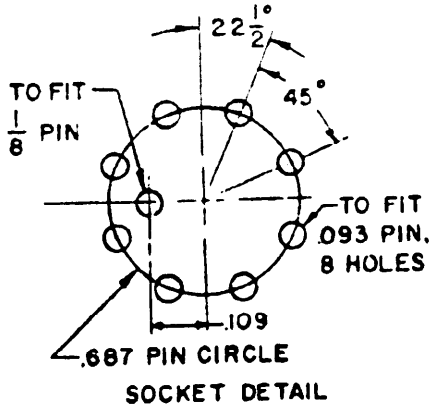

SOCKET DETAIL

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ±1/16 on fractions, ± 0.005 on decimals, and ±1/2° on angles.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Pin-circle center.
4. The jacket opening shall be 1 ± 1/32 diameter, and shall be positioned so that its center is within a 1/16 diameter circle whose center coincides with the pin-circle center.
5. A 1 x 20 inch piece of pressure-sensitive, filament- reinforced, adhesive tape conforming to type II of PPP-T-97 shall be wrapped around the battery at the location shown with a pull tab centrally located on the face opposite the socket. Two flaps that are integral parts of the battery jacket may be used in place of the tape. The two flaps shall project 2 inches from the side opposite the socket at the battery edges. Each flap shall be 4 inches in length measured along the battery edge and shall be located 1 9/16 inches from the end nearest the socket.
6. Size and configuration of an insulating plate at base of socket are optinal.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A_1 unit	A_2 unit	B_1 unit	B_2 unit	B_3 unit
Nominal voltage:	1.5 volts	-6 volts	45 volts	67.5 volts	135 vo.
Maximum closed circuit:	1.68 volts	-6.6 volts	50.0 volts	75.0 volts	148 volts
Usual number and type of cells:	4 "CD"	4 "CD"	30 "AA"	15 "AA"	45 "AA"
Usual cell connection:	Parallel	Series	Series	Series with B_1	Series with B_2

Terminals: 9-hole socket.

Weight (maximum): 6 pounds.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified in Supplement 1.

First Article inspection:

Vibration test I.
Mechanical-shock test I.
Insulation-resistance test I.
Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test.
Capacity, D (without storage).

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test.
Vibration test I.
Mechanical-shock test I.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - All units shall be discharged concurrently through the applicable resistance listed below. Each unit shall be discharged under load 1 for 2 minutes, then under load 2 for 18 minutes. This cycle shall be repeated continuously to the test-end voltage listed below.

	A_1 unit	A_2 unit	B_1 unit	B_2 unit	B_3 unit
Resistance:					
Load 1:	2.46 ohms	545 ohms	5,000ohms	19,300ohms	6,140ohms
Load 2:	3.58 ohms	48 ohms	4,500ohms	6,130ohms	---
Test-end voltage:	1.15 volts	-4.65ohms	33.0volts	50.0volts	110.0volts

Closed circuit voltage:

Maximum: The maximum closed circuit voltage of units "A_1" and "B_3" shall be measured within 5 seconds of application of load 1 listed in the above table. The maximum closed circuit voltage of units "A_2","B_1" and "B_2" shall be measured within 5 seconds of application of load 2 listed in the above table.

Minimum: Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values as noted below:

A_1 unit	1,998 ohms	B_2 unit	4,879 ohms
A_2 unit	34,88 ohms	B_3 unit	11,320 ohms
B_1 unit	3,271.4 ohms		

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A_1	1	1.35
A_2	8	5.40
B_1	18	42.0
B_2	27	63.0
B_3	30	126.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodians:
Army - ER (C)
Navy - SH
Review activities:

User activities:
Army - ME
Navy - YD, MC

Preparing activity:
Army - ER

Project Number: (6135-0155-83)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:53Z
Check the source to verify that this is the current version before use.

wm on the alternate view shall apply. the top view, other than those spc