
MIL-B-18/215C
21 May 1985
SUPERSEDING
MIL-B-18/215B
21 August 1976

MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-471/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

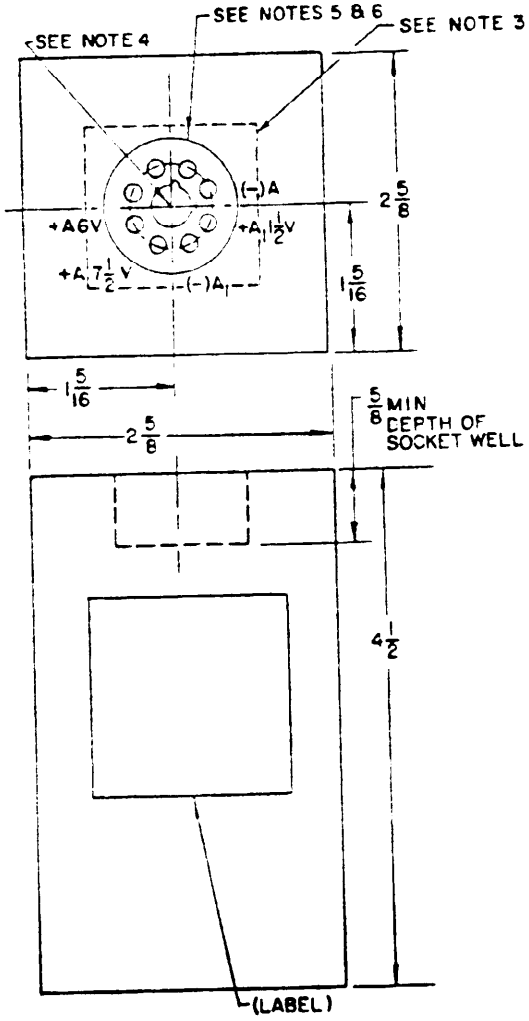

INCHES	MM
1/16	1.59
5/8	15.88
1 1/16	26.99
1 5/16	33.34
2 5/8	66.68
4 1/2	114.30

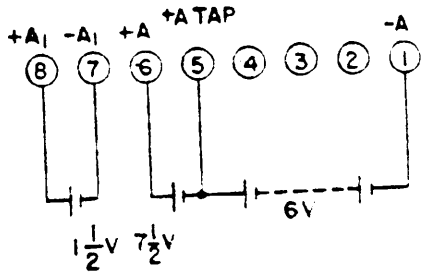

TYPICAL SCHEMATIC

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ± 1/16.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:54Z
Check the source to verify that this is the current version before use.

NOTES: (cont'd)

3. Size of insulating plate at base of socket is optional.

4. Pin-circle center.

5. The jacket opening shall be 1 1/16 minimum diameter, and shall be positioned so that its center is within a 1/16 diameter circle whose center coincides with the pin-circle center.

6. Socket type A is required. (See general specification for details.)

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit	A tap unit	A_1 unit
Nominal voltage:	7.5volts	6 volts	1.5 volts
Usual number and type of cells:	20 "A"	-----	2 "D"
Usual cell connection:	Series-parallel	-----	Parallel

Terminals: 8-hole socket.

Weight (maximum): 1 pound, 10 ounces.

(C) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(C) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(C) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:54Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	18 months
T	90 days

Discharge - The "A" unit shall be discharged through 15.75 ohms and the "A_1" unit through 11.0 ohms continuously to a test-end voltage of 5.8 volts for the "A" unit and 1.25 volts for the "A_1" unit.

Closed circuit voltage - Use TS-183( )/U test for special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values noted below:

A unit	34.88 ohms
A_1 unit	5.983 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
Unit A - 8	6.75
Unit A_1 - 3	1.35

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-84)

User activities:
Army - ME
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:54Z
Check the source to verify that this is the current version before use.