
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1315/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

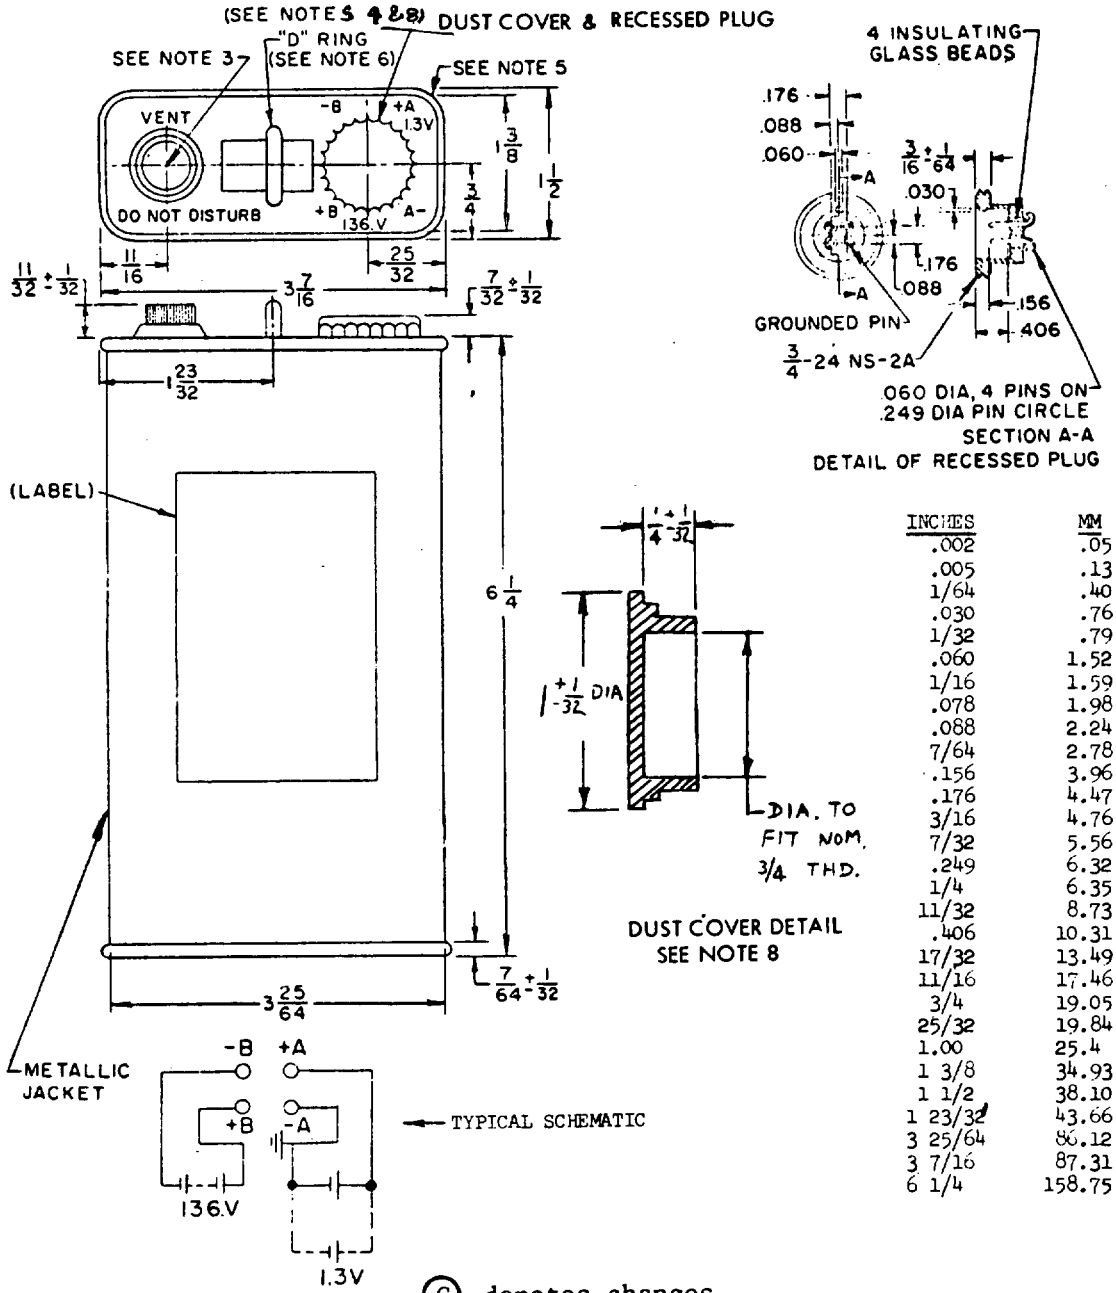

INCHES	MM
.002	.05
.005	.13
1/64	.40
.030	.76
1/32	.79
.060	1.52
1/16	1.59
.078	1.98
.088	2.24
7/64	2.78
.156	3.96
.176	4.47
3/16	4.76
7/32	5.56
.249	6.32
1/4	6.35
11/32	8.73
.406	10.31
17/32	13.49
11/16	17.46
3/4	19.05
25/32	19.84
1.00	25.4
1 3/8	34.93
1 1/2	38.10
1 23/32	43.66
3 25/64	86.12
3 7/16	87.31
6 1/4	158.75

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:55Z
Check the source to verify that this is the current version before use.

FSC-6135

NOTES:

1. All dimensions shown on figure are inches. Unless otherwise specified, tolerances are ±/16 on fractions and ± 0.005 on decimals.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The vent shall release at 18± 4 pounds-per-square-inch-gage pressure.
4. Solder recessed plug to jacket to prevent moisture from entering the battery jacket.
5. Square, round, or diagonal corners are optional.
6. "D" ring .080 ± .005 CRS with opening of 1/2 X 5/8 inch.
7. "The cells shall be made either with a poly-vinyl-chloride or dialysis barrier or equivalent and sealed with a nylon or polyethylene grommet or equivalent."
8. Dust cover shall be according to MIL-C-5501 and NSA Standard NAS 813.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit	B unit
Nominal voltage:	1.3 volts	136 volts
Usual number and type of cells:	4. "R"-12"	102 "R"-640R"
Usual cell connection:	Parallel	Series

Terminals: Socket.

Jacket material: Metallic.

Color of jacket: Color 34087 in accordance with FED-STD-595.

Weight (maximum): 3 pounds.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical -shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ± 20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ± 20 volts.
Vibration test.
Mechanical -shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:55Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

Discharge - The "A" unit shall be discharged through 4.5 ohms for 5 minutes, then through 2.1 ohms for the next 5 minutes. The "B" unit shall be discharged through 10,400 ohms for 5 minutes, then through 2,980 ohms for the next 5 minutes. Both units shall be discharged simultaneously, and this cycle shall be repeated continuously to a test-end voltage of 1.05 volts for the "A" unit and 85.0 volts for the "B" unit.

Closed circuit voltage - Use TS-183 ( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values noted below:
A unit 1,998 ohms
B unit 1,980 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
Unit A - 1	1.00
Unit B - 24	102

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-86)

User activities:
Army - ME
Navy - YD, MC

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/22865

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:55Z
Check the source to verify that this is the current version before use.